

Operation Manual

NUENDO₂

MEDIA PRODUCTION SYSTEM



Manual by Ludvig Carlson, Anders Nordmark, Roger Wiklander
Quality Control: C. Bachmann, H. Bischoff, S. Pfeifer, C. Schomburg

The information in this document is subject to change without notice and does not represent a commitment on the part of Steinberg Media Technologies GmbH. The software described by this document is subject to a License Agreement and may not be copied to other media except as specifically allowed in the License Agreement. No part of this publication may be copied, reproduced or otherwise transmitted or recorded, for any purpose, without prior written permission by Steinberg Media Technologies GmbH.

All product and company names are ™ or ® trademarks of their respective owners.
Windows 2000 and Windows XP are trademarks of Microsoft Corporation. The Mac logo is a trademark used under license. Macintosh and Power Macintosh are registered trademarks.

© Steinberg Media Technologies GmbH, 2003.
All rights reserved.



Table of Contents

9 About this manual

10 Welcome!

13 VST Connections: Setting up input and output busses

14 About this chapter

14 Setting up busses

20 Using the busses

25 Playback and the Transport panel

26 Background

30 Operations

34 Options and Settings

37 Recording

38 Background

39 Basic recording methods

43 Audio recording specifics

64 MIDI Recording Specifics

76 Options and Settings

81 The Project window

82 Background

84 Window Overview

97 Operations

137 Options

141 Folder tracks

142 About folder tracks

143 Handling folder tracks

145 Working with folder parts

149 Using markers

150 About markers

150 The Marker window

154 Using the Marker track

159 Marker key commands

160 Editing markers in the

Project Browser

161 Fades and crossfades

162 Creating fades

165 The Fade dialogs

168 Creating crossfades

170 The Crossfade dialog

178 Auto Fades and Crossfades

181 The mixer

182 About this chapter

183 Overview

187 Configuring the mixer

194 The audio channel strips

196 The MIDI channel strips

197 The common panel

198 The input & output channels

199 Basic mixing procedures

207 Audio specific procedures

221 MIDI specific procedures

223 Utilities

229 Audio effects

230 About this chapter

230 Overview

232 Insert effects

242 Send effects

253 Making settings for the
effects

256 Installing and managing
effect plug-ins

263 VST Instruments

- 264** Introduction
- 265** Activating and using VST Instruments
- 271** The Instrument Freeze function

275 Surround sound

- 276** Background
- 279** Window overview
- 281** Operations

293 Automation

- 294** Background
- 297** Automation track operations
- 303** Using Write/Read automation
- 309** Working with automation curves
- 315** Tips and common methods
- 316** Options and Settings

317 Remote controlling the mixer

- 318** About this chapter
- 318** Setting Up
- 320** Operations
- 322** The Generic Remote device

327 Audio processing and functions

- 328** Background
- 329** Audio processing
- 351** Applying plug-ins
- 354** The Offline Process History dialog
- 356** Batch Processing
- 359** Freeze Edits

- 360** Detect Silence
- 363** The Spectrum Analyzer
- 366** Statistics

367 The Sample Editor

- 368** Background
- 368** Opening the Sample Editor
- 369** Window overview
- 374** Operations
- 386** Options and settings

389 The Audio Part Editor

- 390** Background
- 390** Opening the Audio Part Editor
- 391** Window overview
- 396** Operations
- 398** Common methods
- 400** Options and Settings

401 Working with hitpoints and slices

- 402** Background
- 403** Using hitpoints
- 409** Editing hitpoints
- 416** Creating slices
- 417** Creating groove quantize maps
- 418** Other Advanced submenu items

421 The Pool

- 422** Background
- 424** Window Overview
- 428** Operations
- 447** Options and Settings

449 MIDI realtime parameters and effects

- 450 Introduction
- 451 The Inspector – General handling
- 452 Basic track settings
- 455 Track parameters
- 459 MIDI effects
- 465 Merge MIDI in Loop

467 MIDI processing and quantizing

- 468 Introduction
- 469 Quantizing
- 479 Other MIDI menu functions
- 484 Dissolve Part

487 The MIDI editors

- 488 About editing MIDI
- 489 Opening a MIDI editor
- 492 The Key Editor – Overview
- 498 Key Editor operations
- 523 The Drum Editor – Overview
- 526 Drum Editor operations
- 529 Working with drum maps
- 537 Using drum name lists
- 538 The List Editor – Overview
- 540 List Editor operations
- 547 Common MIDI editor options and settings

549 The Tempo Track Editor

- 550 Background
- 551 Window overview
- 554 Operations
- 560 Options and settings
- 561 The Beat Calculator
- 563 Merge Tempo From Tapping
- 564 The Time Warp tool

575 The Project Browser

- 576 Background
- 576 Opening the Project Browser
- 576 Window Overview
- 577 Navigating in the Browser
- 578 Customizing the View
- 578 About the Sync Selection option
- 579 Editing audio tracks
- 582 Editing MIDI tracks
- 585 Editing Automation tracks
- 585 Editing the Video track
- 586 Editing the Marker track
- 587 Editing the Tempo track
- 587 Editing Time Signatures
- 588 Deleting Events

589 The Track Sheet

- 590 Overview
- 594 Printing the Track Sheet

595 Export Audio Mixdown

- 596** Introduction
- 597** Mixing down to an audio file
- 599** File format specifics

613 Synchronization

- 614** Background
- 622** Window Overview
- 623** Operations
- 637** Options

639 VST System Link

- 640** Introduction
- 641** Preparations
- 646** Activating VST System Link
- 653** Application examples

657 Video

- 658** Background
- 659** Operations
- 665** Options
- 666** The Edit Mode

669 ReWire

- 670** Introduction
- 671** Launching and quitting
- 672** Activating ReWire channels
- 673** Using the transport and tempo controls
- 674** How the ReWire channels are handled in Nuendo
- 675** Routing MIDI via ReWire2
- 676** Considerations and limitations

677 File handling

- 678** File Operations
- 702** Options and Settings

705 Customizing

- 706** Background
- 707** Working with window layouts
- 710** Customizing the Transport panel
- 712** Customizing the toolbars
- 714** Customizing track controls
- 719** Configuring the main menu items
- 722** About preference presets
- 724** Appearance
- 724** Where are the settings stored?

727 Key commands

- 728** Background
- 729** Setting up Key Commands
- 742** Setting up tool modifier keys

743 Index

1

About this manual

Welcome!

This is the Operation Manual for Steinberg's Nuendo 2.1. Here you will find detailed information about virtually all features and functions in the program.

How to use the manuals and the Help

When it comes to manuals, different users look for information in different ways, depending on their previous knowledge and personal preferences. You may be looking for a complete description of a procedure, you may just be trying to find a certain function in the program, you may have found a function in the program and want it explained – or you may simply want to learn it all!

Therefore, there are several ways to enter the documentation and get help:

- Use the Table of Contents to browse the manual or the Help and find the section you need to know more about.
In the pdf version of the Operation Manual (and in the help) you can click directly on a chapter or section to go there.
- Use the Index to look up specific features and functions.
Again, in the pdf (and the help) you can click directly on the page number for an index entry to go to there. The help also allows you to perform a free search of any term.
- In the program you will find Help buttons in most dialogs – click to get information about that specific dialog.
Similarly, you can press [F1] to get information about the current window.
- If you want information about a specific menu item, use the Menu Reference section in the Help.
All main menu items in Nuendo are listed and explained there.
- Finally, you could read the manuals from start to end if you like.
See below for a description of all parts of the Nuendo documentation package.

Other documents

Apart from the Operation Manual and the help, the following documents are included with Nuendo:

Getting Started

In this book (also available in Adobe Acrobat pdf format) you will find:

- Requirements, installation and setting up your system.
- Basic concepts and terminology.
- Basic methods – e.g. how to set values, use tools and menus.
- A list of all default key commands.
- A number of tutorials, helping you get started with working in Nuendo.

MIDI devices and features

In this pdf document you will find:

- Information on how to set up and manage MIDI devices in Nuendo.
- Descriptions of the included MIDI effect plug-ins.
- Information on how to edit MIDI System Exclusive messages.
- Information on how to use the Logical Editor and Input Transformer.

Audio Effects and VST Instruments

In this pdf document you will find:

- Descriptions of the included VST audio effect plug-ins.
- Descriptions of the included VST instruments.

These descriptions can also be found in the help.

Networking

This pdf document describes how you can use Nuendo's project sharing and networking features to collaborate with other users of Nuendo in a TCP/IP based peer-to-peer network.

Remote Control Devices

This pdf document lists the supported MIDI remote control devices and describes how to set up and use them with Nuendo.

Score Layout and Printing

This pdf document describes the score editing features in Nuendo.

Using Nuendo with DSP Factory (Windows only)

In this pdf document you will find detailed information about Nuendo's implementation for the Yamaha DSP Factory audio card.

-
- All pdf documents can be opened from the Help menu in the program, from the Nuendo Documentation subfolder on the Windows Start menu or from the folder /Library/Documentation/Nuendo/ under Mac OS X.
-

2

VST Connections: Setting up input and output busses

About this chapter

As described in the Getting Started book, Nuendo uses a system of input and output busses to transfer audio between the program and the audio hardware.

- Input busses let you route audio from the inputs on your audio hardware into the program. This means that when you record audio, you will always do this through one or several input busses.
- Output busses let you route audio from the program to the outputs on your audio hardware. When you play back audio, you will always do this through one or several output busses.

As you can see, the input and output busses are vital when you work with Nuendo. That's the reason why you find this chapter in the beginning of the Operation Manual – once you understand the bus system and set up the busses properly, it will be easy to go on with recording, playing back, mixing and doing surround work.

Setting up busses

Strategies

You can create any number of busses in Nuendo, in virtually any channel configuration – mono, stereo or a number of surround formats.

- **The bus configuration is saved with the projects – therefore it's a good idea to add and set up the busses you need and save these in a template project (see [page 682](#)).**

When you start working on new projects, you start from this template. That way you get your standard bus configuration without having to make new bus settings for each new project. If you need to work with different bus configurations in different projects, you could either create several different templates or store your configurations as presets (see [page 19](#)). The templates can of course also contain other settings that you regularly use – sample rate, record format, a basic track layout, etc.

So, which type of busses do you need? This depends on your audio hardware, your general audio setup (e.g. surround speaker setup) and what kind of projects you work with. Here's an example:

Let's say you are using audio hardware with eight analog inputs and outputs and digital stereo connections (10 inputs and outputs all in all). Furthermore, you work with a surround speaker setup in 5.1 format. Here's a list of busses you may wish to add:

Input busses

- Most likely you need at least one stereo input bus assigned to an analog input pair. This would let you record stereo material. If you want to be able to record in stereo from other analog input pairs as well, you could add stereo input busses for these too.
- Although you can record mono tracks from one side of a stereo input, it may be a good idea to add a dedicated mono input bus. This could be assigned to an analog input to which you have connected a dedicated microphone pre-amp for example. Again, you could have several different mono busses.
- You probably want a dedicated stereo input bus assigned to the digital stereo input, for digital transfers.
- If you want to transfer surround material directly to a surround track in Nuendo (e.g. from surround-configured location recording equipment) you need an input bus in that surround format (here, this would be a 5.1 input bus).

Output busses

- You probably want one or several stereo output busses for monitoring and listening to stereo mixes.
- For digital transfers, you need a stereo bus assigned to the digital stereo output as well.
- You need a surround bus in the format of your speaker configuration (here, 5.1) assigned to the correct outputs (which in turn are connected to the correct speakers).
- You may want additional surround busses if you tend to work in different surround formats.

-
- Different busses can use the same inputs/outputs on the audio hardware! You may for example want a stereo output bus assigned to the same outputs as the front stereo channels in your surround bus – this makes it easy to listen to stereo mixes without having to reconnect.**

Preparations

Before you set up busses, you should name the inputs and outputs on your audio hardware. For example, if you are using a 5.1 surround speaker setup, you should name the outputs according to which speaker they are connected to (Left, Right, Center and so on).

The reason for this is compatibility – it makes it easier to transfer projects between different computers and setups. For example, if you move your project to another studio, the audio hardware may be of a different model. But if both you and the other studio owner have given your inputs and outputs names according to the surround setup (rather than names based on the audio hardware model), Nuendo will automatically find the correct inputs and outputs for your busses and you will be able to play and record without changing the settings.


You name your inputs and outputs in the Device Setup dialog:

1. Open the Device Setup dialog from the Devices menu.
 2. Select the VST Output Ports device in the list to the left and make sure the Setup tab is selected.
The available output ports on your audio hardware are listed.
 3. To rename a port, click its name in the list and type a new name.
 - If needed, you can also disable ports by clicking in the “Visible” column (so that it says “No”).
Disabled ports won't show up in the VST Connections window when you are making bus settings. If you attempt to disable a port that is already used by a bus, you will be asked whether that is really what you want – note that this will remove the port from the bus!
 4. Select the VST Input Ports and name them in the same way.
 5. Click OK to close the Device Setup dialog.
- **If you open a project created on another computer and the port names don't match (or the port configuration isn't the same – e.g. the project is created on a system with multi-channel i/o and you open it on a stereo in/out system), a Pending Connections dialog will appear.**

This allows you to manually re-route ports used in the project to ports available in your system.

The VST Connections window

You add and set up busses in the VST Connections window, opened from the Devices menu.

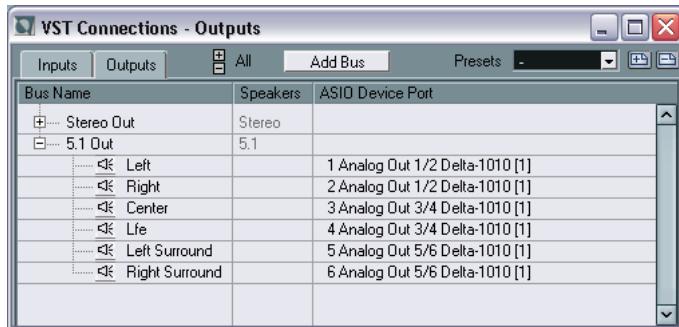

There are two tabs in the window, for viewing input busses or output busses. Depending on which tab you have selected, the window lists the current input or output busses, with the following three columns:

Column	Description
Bus Name	Lists the busses. You can select busses and rename them by clicking on them in this column.
Speakers	Indicates the speaker configuration (mono, stereo, surround formats) of each bus.
ASIO Device Port	When you have “opened” a bus (by clicking its + button in the Bus Name column) this column shows which physical input/output on your audio hardware is used by the bus.

Adding a bus

1. Click the Inputs or Outputs tab depending on which type of bus you want to add.
2. Click the Add Bus button.
A dialog appears.



3. Select the desired (channel) configuration.

The pop-up menu contains Mono and Stereo options as well as the most common surround formats. To select another surround format, use the "More..." submenu.

- Alternatively you can right-click (Win) or [Ctrl]-click (Mac) in the VST Connections window and add a bus in the desired format directly from the context menu that appears.

The new bus appears with the ports visible.

4. Click in the ASIO Device Port to select an input/output port for a channel in the bus.


The pop-up menu that appears lists the ports with the names you have given them in the Device Setup dialog. Repeat this for all channels in the bus.

Adding a child bus

A surround bus is essentially a set of mono channels – 6 channels in the case of 5.1 format. If you have a mono track in the project, you can route it to a separate speaker channel in the bus (or route it to the whole surround bus and use the surround panner to position it in the surround image). But what if you have a stereo track that you simply want to route to a stereo channel pair within the bus (Left and Right or Left Surround and Right Surround for example)? For this you need to create a *child bus*:

1. Select the surround bus in the list and right-click (Win) or [Ctrl]-click (Mac) it.

A pop-up menu appears.

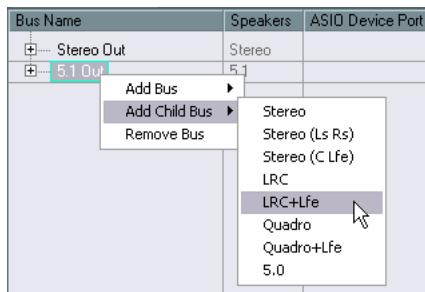

2. Select a channel configuration from the "Add Child Bus" submenu.

As you can see, you can create stereo child busses (routed to various speaker channel pairs in the surround bus) or other surround bus formats (with fewer channels than the "parent bus").

The child bus you created will be available for direct routing in the mixer. It's a part of the parent surround bus, which means there will be no separate channel strip for it.

Although child busses are probably most useful in output busses, you could also create child busses within a surround input bus – for example if you want to record a stereo channel pair (e.g. front left-right) in the surround bus to a separate stereo track.

Other bus operations

- To change the port assignment for a bus you proceed as when you added it – make sure the channels are visible (by clicking the + button next to the bus, or by clicking the "+ All" button at the top of the window) and click in the ASIO Device Port column to select ports.
- To remove a bus you don't need, select it in the list, right-click (Win) or [Ctrl]-click (Mac) and select "Remove Bus" from the pop-up menu.
- You can store and recall bus Presets with the pop-up menu at the top of the window.

To store the current configuration as a preset, click the store (+) button and enter a name for the preset. You can then select the stored configuration directly from the Presets pop-up menu at any time. To remove a stored preset, select it and click the (-) button.


Using the busses

This section describes briefly how to use the input and output busses you have created. This is described in more detail in the chapters “[Recording](#)” and “[The mixer](#)”.

Routing

When you play back an audio track (or any other audio channel in the mixer – VST Instrument channels, ReWire channels, etc.), you route it to an output bus. In the same way, when you record on an audio track you select from which input bus the audio should be sent.

- For audio tracks, you can select input and output busses in the Inspector, using the “In” and “Out” pop-up menus.

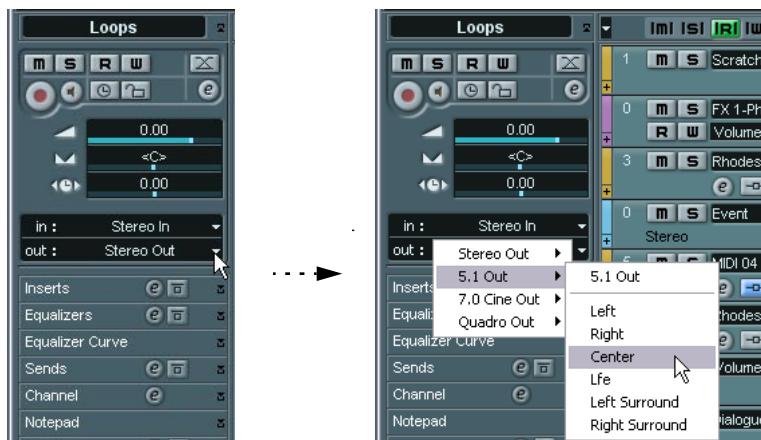

- For all audio-type channels, you select busses in the Input and Output Settings panel at the top of each channel strip in the mixer.

For VST Instrument channels, ReWire channels, Group channels and FX channels you will only be able to select output busses.



- If the Input and Output Settings panel isn't shown, click the Show Input and Output Settings field in the common panel to the left in the mixer.



When selecting an input bus for a track you can only select busses that correspond to the track's channel configuration. Here are the details:

- Mono tracks can be routed to mono busses or individual channels within a stereo or surround bus (input or output). You can also route a mono track to the “whole” stereo or surround output bus, in which case a pan control (stereo pan or surround panner) will be used to position the sound.
- Stereo tracks can be routed to stereo busses or stereo child busses within a surround bus (input or output).
- Surround tracks can be routed to busses with the same number of speaker channels as the track (or to corresponding child busses within a “larger” surround bus).

Viewing the busses in the mixer

In the mixer, busses are represented by input and output channels (shown in separate panes to the left and right in the window). You can show or hide the input and output channels independently by clicking the buttons Hide Input Channels and Hide Output Channels in the mixer's common panel to the left:



Input channels



The input channels are shown to the left in the mixer. As you can see, each input channel resembles a regular mixer channel strip. Here you can do the following:

- Check and adjust the recording level using the Input Gain knobs and/or the level fader.

See [page 47](#).

- Change the phase of the input signal.

This is done by clicking the Input Phase button next to the Input Gain control.

- Add effects or EQ to the input bus.

See [page 60](#) for an example of how to add effects to your recording at the input bus stage.

-
- **The settings you make in the input channel strip will be a permanent part of the recorded audio file!**
-

Output channels



The output channels are shown to the right in the mixer. Here you can do the following:

- Adjust the total output level for the busses with the faders.
For stereo output busses you can also adjust the stereo balance with the pan control.
- Add effects or EQ.
These will affect the whole bus. Examples of effects you may want to add here include compressors, limiters and dithering. See [page 239](#).

3

Playback and the Transport panel

Background


This chapter describes the various methods available for controlling Playback and Transport functions in Nuendo.


The Transport panel

Below you can find a brief description of each item on the Transport panel.

- You can customize the look of the Transport panel, hiding unneeded controls and moving controls as desired – see [page 710](#).

The pictures below show the Transport panel with all controls visible and in their default position. The Transport panel is divided into sections, from left to right.

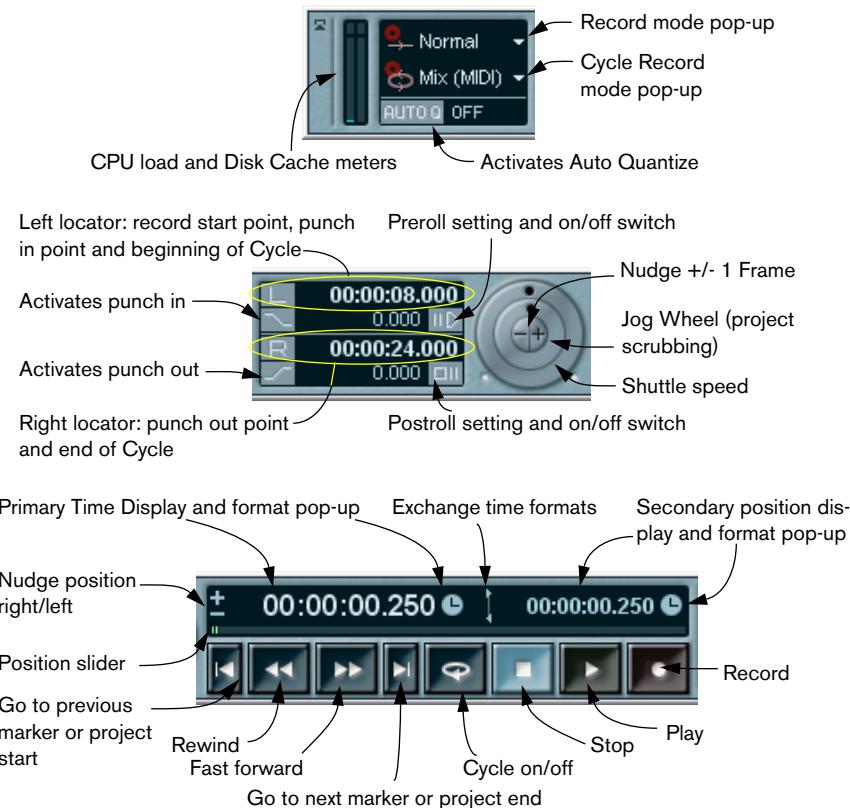

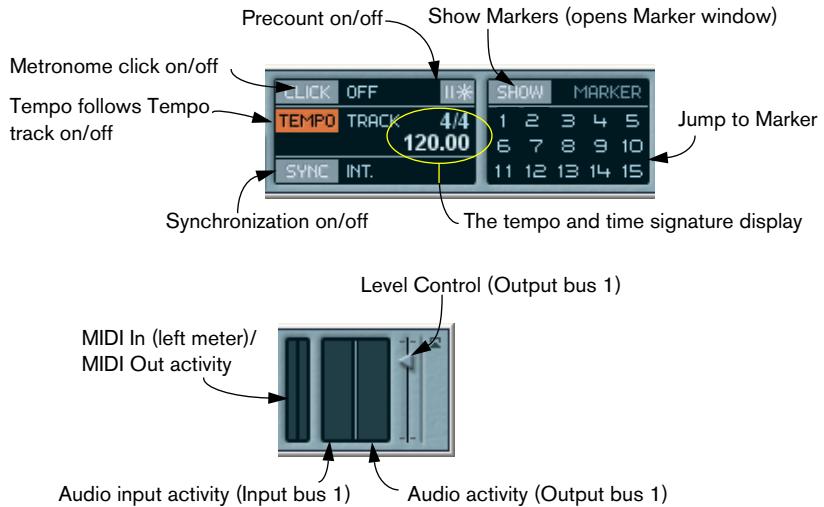

- The main Transport functions (Cycle/Stop/Play/Record) can also be shown on the toolbar.



In addition, various play options are available on the Transport menu.

Hiding and showing


The Transport panel is shown by default when you launch a new project. To hide or show it, select the “Transport Panel” item from the Transport menu (or use a key command - by default [F2]).

About Preroll and Postroll

These items are described in the chapter “Recording” – see [page 77](#).

Customizing the Transport panel

You can customize the appearance of the Transport panel by right-clicking (Win) or [Ctrl]-clicking (Mac) anywhere on the panel and making selections on the pop-up menu that appears.

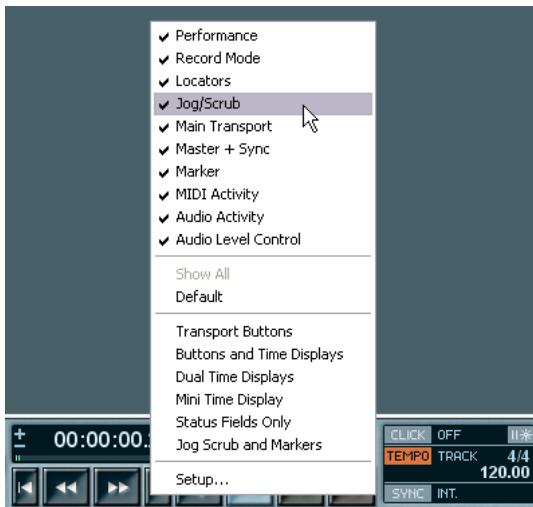


- On the upper half of the pop-up menu you can hide or show elements on the panel by activating or deactivating the corresponding menu items.
- Selecting the Show All item displays all sections of the Transport panel.
- Selecting Default shows all sections in their default positions on the panel.
- The items in the lower half of the pop-up menu are preset configurations for the Transport panel. You will also find your own stored presets here, for quick selection.
- Selecting Setup brings up a dialog where you can set show/hide status for the separate sections, configure where the sections should be placed on the panel and store different Transport panel layouts as presets for instant recall.

For more about customizing the Transport panel, see [page 710](#).


The numeric keypad

In the default Key Command settings, the numeric keypad on the computer keyboard is assigned various Transport panel operations. The keypads are slightly different on PC and Macintosh computers:

PC:

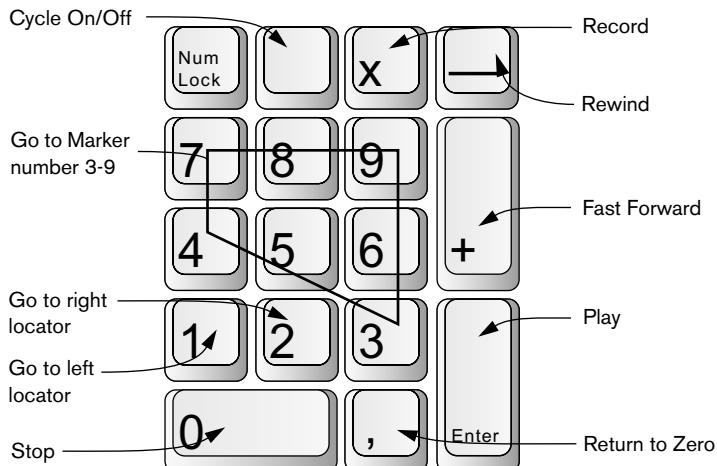

Mac:

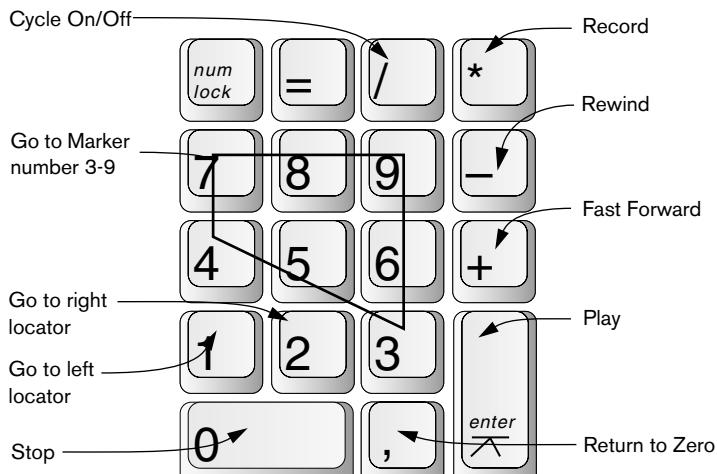

Operations

Setting the project cursor position

There are several ways to move the project cursor position:

- By using Fast Forward and Rewind.
- By using the Jog/Shuttle/Nudge control on the Transport panel (see [page 33](#)).
- By dragging the project cursor in the lower part of the ruler.
- By clicking in the ruler.
Double clicking in the ruler will start or stop playback, moving the cursor at the same time.
- If the option “Locate when Clicked in Empty Space” is activated in the Preferences dialog (Transport page) you can click anywhere in an empty section of the Project window to move the cursor position.
- By changing the value in any of the position displays.
- By using the position slider above the transport buttons.

The range of the slider relates to the Length setting in the Project Setup dialog. Hence, moving the slider all the way to the right will take you to the end of the project.

- By using markers (see [page 150](#)).
- By using playback options (see [page 35](#)).
- By using functions on the Transport menu.

The following functions are available:

Function	Description
Locate Selection	Moves the project cursor to the beginning of the current selection. For this to be available, you must have selected one or more events or parts, or made a selection range.
Locate Next/Previous Marker	This moves the project cursor to the closest marker to the right or left (see page 150).
Locate Next/Previous Event	This moves the project cursor forwards or backwards respectively, to the closest beginning or end of any event on the selected track(s).

- **If Snap is activated when dragging the project cursor, the Snap value is taken into account. This can be helpful for finding exact positions quickly.**
- **There are also numerous key commands available for moving the project cursor (in the Transport category in the Key Commands dialog).**
For example, you can assign key commands to the “Step Bar” and “Step Back Bar” functions, allowing you to move the project cursor in steps of one bar, backwards and forwards.

About the Transport panel display formats




Primary time display (left) and secondary time display (right).

The time unit shown in the ruler can be independent from the time unit shown in the main time display on the Transport panel. This means that you can display timecode in the transport position display and bars and beats in the ruler, for example. In addition, there is a secondary time display to the right of the primary time display which is also independent, giving you three different time units shown at the same time (in the Project window, you can also create additional ruler tracks – see [page 95](#)).

The following rules apply:

- If you change the time format from the primary time display on the Transport panel, this will apply to the ruler as well.
This is the same as changing the display format in the Project Setup. Therefore, to have different display formats in the ruler and the main time display you should change the format in the ruler.
- The primary time display format is set on the pop-up menu to the right in the main position display.

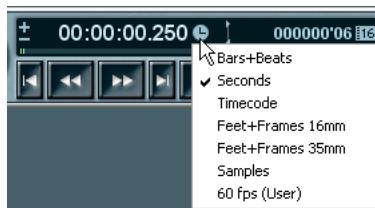

- The setting here also determines the time format displayed for the left and right locators.
- The secondary time display is completely independent, and the display format is set on the pop-up menu to the right in the secondary position display.
- You can swap time formats between the primary and secondary time displays by clicking the double arrow symbol between them.

The left and right locators

The left and right locators are a pair of position markers used for specifying punch-in and punch-out positions during recording, and as boundaries for cycle playback and recording.

- When cycle mode is activated on the Transport panel, the area between the left and right locator will be repeated (cycled) on playback.

However, if the right locator is positioned before the left, this will work as a “jump” or “skip mode” – when the project cursor reaches the right locator it will immediately jump to the left locator position and continue playback from there.

There are several ways to set locator positions:

- To set the left locator, press [Ctrl]/[Command] and click at the desired position in the ruler.
Similarly, pressing [Alt]/[Option] and clicking in the ruler sets the right locator. You can also drag the locator “handles” directly in the ruler.



The locators are indicated by the “flags” in the ruler. The area between the locators is highlighted in the ruler and in the Project window (see [page 724](#)). Note that if the right locator is before the left locator the area will be red in the ruler to indicate this.

- Click and drag in the upper half of the ruler to “draw” a locator range. If you click on an existing locator range, you can drag to move it.
- Pressing [Ctrl]/[Command] and pressing [1] or [2] on the numeric keypad sets the left or right locator to the project cursor position.
Similarly, you can press [1] or [2] on the numeric keypad (without [Ctrl]/[Command]) to set the project cursor position to the left or right locator position. Note that these are default key commands – you can change these if you like.
- By creating cycle markers you can store any number of left and right locator positions, which can be recalled by simply double clicking on the corresponding marker (see [page 154](#)).
- The “Locators to Selection” item on the Transport menu (default key command [P]) sets the locators to encompass the current selection. This is available if you have selected one or several events or made a selection range.
- You can also adjust the locators numerically in the Transport panel. Clicking the L/R buttons in the locator section on the Transport panel will move the project cursor to the respective locator. If you press [Alt]/[Option] and click the L or R button, the corresponding locator will be set to the current project cursor position.

The Shuttle Speed control



The shuttle speed control (the outer wheel on the Transport panel) allows you to play the project at any playback speed, forwards or backwards. This provides a quick way to locate or “cue” to any position in the project.

- Turn the shuttle speed wheel to the right to start playback. The further to the right you move the wheel, the faster the playback speed. You don't have to keep the mouse button pressed – playback will continue until you stop it.
- If you turn the wheel to the left instead, the project will play backwards. Similarly, the playback speed depends on how far to the left you turn the wheel.
- To stop playback, click Stop as usual or turn the shuttle speed wheel to the middle position.

Project scrubbing – the Jog Wheel



The middle wheel on the Transport panel serves as a jog wheel. By clicking and dragging it to the right or left you will move the playback position manually forwards or backwards – much like scrubbing on a tape deck. This helps you pinpoint exact locations in the project.

- Note that the jog wheel is an “endless dial” – you can turn it as many times as needed to move to the desired location. The faster you turn the wheel, the faster the playback speed.
- If you click the jog wheel during playback, playback will automatically stop.

The nudge position buttons

The + and – buttons in the middle of the Shuttle/Jog Wheel allows you to nudge the project cursor position to the right or left, respectively. Each time you click a nudge button, the project cursor is moved by one frame.

Options and Settings

The “Return to Start Position on Stop” preference

This setting is found on the Transport page in the Preferences dialog (found on the File menu under Windows, on the Nuendo menu under Mac OS X).

- If “Return to Start Position on Stop” is activated when you stop playback, the project cursor will automatically return to the position where recording or playback last started.
- If “Return to Start Position on Stop” is deactivated, the project cursor will remain at the position where you stop playback.

Pressing Stop *again* will return the project cursor to the position where recording or playback last started.

About track disable/enable

For audio tracks, the track context menu contains an item named “Disable Track”. This shuts down all disk activity for the track, as opposed to using Mute, which merely turns down the output volume for a track. For example, if you often record “alternative takes” you can easily build up a large number of takes on different tracks. Even though these tracks are muted, they are actually still “playing back” from the hard disk during playback. This puts an unnecessary load on your disk system, so using “Disable Track” is recommended for such situations.

- Select “Disable Track” for tracks that you want to keep in the project for later use (but don’t want to play back now).
Select “Enable Track” from the track context menu to re-enable disabled tracks.

Playback functions

Apart from the standard transport controls on the Transport panel, you can also find a number of functions that can be used to control playback on the Transport menu. The items have the following functionality:

Option	Description
Play from Selection Start	This activates playback from the beginning of the currently selected range.
Play from Selection End	This activates playback from the end of the currently selected range.
Play until Selection Start	This activates playback two seconds before the start of the currently selected range and stops at the selection start.
Play until Selection End	This activates playback two seconds before the end of the selected range and stops at the selection end.
Play until Next Marker	This activates playback from the project cursor and stops at the next marker.
Play Selection Range	This activates playback from the start of the selected range and stops at the selection end.
Loop Selection	This activates playback from the start of the selected range and continuously starts over again upon reaching the selection end.

-
- The functions listed above (except “Play until Next Marker”) are only available if you have selected one or more events or made a selection range.
-

About Chase

Chase is basically a function that makes sure your MIDI instruments sound as they should when you locate to a new position and start playback. This is accomplished by having the program transmitting a number of MIDI messages to your instruments each time you move to a new position in the project, making sure all MIDI devices are set up correctly with regard to program change, controller messages (such as MIDI Volume) etc.

For example, let's say you have a MIDI track with a program change event inserted at the beginning. This event makes a synth switch to a piano sound.

In the beginning of the first chorus you have another program change event which makes the same synth switch to a string sound.

You now play back the song. It begins with the piano sound and then switches to the string sound. In the middle of the chorus you stop and rewind to some point between the beginning and the second program change. The synth will now still play the string sound although in this section it really should be a piano!

The Chase function takes care of that. If program change events are set to be chased, Nuendo will track the music back to the beginning, find the first program change and send this out, so that the synth is set to the right sound.

The same thing can apply to other event types as well. The Chase Events settings in the Preferences dialog—MIDI page determine which event types will be chased when you locate to a new position and start playback.



- Event types for which the checkbox is activated here will be chased.

4

Recording

Background

This chapter describes the various recording methods that you can use in Nuendo. As it is possible to record both audio and MIDI tracks in Nuendo, both these recording methods are covered in this chapter.

Before you start

This chapter assumes that you are reasonably familiar with certain basic recording concepts, and that the following initial preparations have been made:

- You have properly set up, connected and calibrated your audio hardware.

This is described in the Getting Started book.

- You have opened a project and set the project setup parameters to your specifications.

Project setup parameters determine the record format, sample rate, project length etc. that affect the audio recordings you make during the course of the project. See [page 97](#).

- If you plan to record MIDI, your MIDI equipment should be set up and connected correctly.

See the Getting Started book.

Basic recording methods

This section describes the general methods used for recording. However, there are additional preparations and procedures that are specific to audio and MIDI recording respectively. Make sure to read these sections before you start recording (see [page 43](#) and [page 64](#)).

Record enabling a track

Nuendo can record on a single track or on several tracks (audio and/or MIDI) simultaneously. To make a track ready for recording, click the Record Enable button for the track in the Track list, in the Inspector or in the mixer. When activated, the button(s) turn red, indicating record ready mode.



Record Enable in the Inspector, Track list and mixer.

- If the option “Enable Record on Selected Track” is activated in the Preferences dialog (Editing page), tracks are automatically record enabled when you select them in the Track list.
- The exact number of audio tracks you can record simultaneously depends on your computer CPU and hard disk performance.

Manually activating recording

You activate recording by clicking the Record button on the Transport panel or toolbar, or by using the corresponding key command (by default [*] on the numeric keypad).

Recording can be activated from Stop mode (from the current cursor position or from the left locator) or during playback:

- If you activate recording from Stop mode, and the option “Start Record at Left Locator” is activated on the Transport menu, recording will start from the left locator.

The preroll setting or the metronome count-in will be applied (see [page 77](#)).

- If you activate recording from Stop mode, and “Start Record at Left Locator” is deactivated, recording will start from the current project cursor position.
- If you activate recording during playback, Nuendo will immediately enter Record mode and start recording at the current project cursor position.

This is known as “manual punch in”.

Activating recording in Sync mode

If you are synchronizing the Nuendo transport to external equipment (Sync is activated on the Transport panel) and you activate recording, the program will go into “record ready” mode (the record button on the Transport panel will light up). Recording then starts when a valid timecode signal is received (or when you manually click the Play button). See [page 614](#) for more information about synchronization.

Automatically activating recording

Nuendo can automatically switch from playback to recording at a given position. This is known as “automatic punch in”. A typical use for this would be if you need to replace a section of a recording, and want to listen to what is already recorded, up to the recording start position.

1. Set the left locator to the position where you want recording to start.
2. Activate the Punch In button on the Transport panel.



Punch In activated.

3. Activate playback from some position before the left locator.
When the project cursor reaches the left locator, recording is automatically activated.

Stopping recording

Again, this can be done automatically or manually:

- If you click the Stop button on the Transport panel (or use the corresponding key command, by default [0] on the numeric keypad), recording is deactivated and Nuendo goes to Stop mode.
- If you click the Record button or use the key command for recording, by default [*], recording is deactivated but playback continues. This is known as “manual punch out”.
- If the Punch Out button is activated on the Transport panel, recording will be deactivated when the project cursor reaches the right locator. This is known as “automatic punch out”. By combining this with automatic punch in, you can set up a specific section to record – again very useful if you want to replace a certain part of a recording. See also [page 76](#).



Punch In and Out activated.

Cycle recording

Nuendo can record and play back in a cycle – a loop. You specify where the cycle starts and ends by setting the left and right locators. When the cycle is active, the selected section is seamlessly repeated until you hit Stop or deactivate cycle mode.

- To activate cycle mode, click the cycle button on the Transport panel. If you now start playback, the section between the left and right locator is repeated indefinitely until you stop.



Cycle activated

- To record in cycle mode, you can start recording from the left locator, from before the locators or from within the cycle, from Stop mode or during playback.
As soon as the project cursor reaches the right locator, it will jump back to the left locator and continue recording a new lap.
- The results of cycle recording depend on the selected cycle record mode and are different for audio (see [page 54](#)) and MIDI (see [page 69](#)).

Audio recording specifics

Selecting a recording file format

The format of recorded files is set in the Project Setup dialog on the Project menu. There are three settings: sample rate, record format (bit depth) and record file type. While the sample rate is set once and for all when you start working on a new project, the bit depth and file type can be changed at any time.

Record file type

The Record File Type setting determines which type of files will be created when you record:

File type	Description
Wave File	Wave files have the extension ".wav" and are the most common file format on the PC platform.
Wave 64 File	Wave64 is a proprietary format developed by Sonic Foundry Inc. Audio-wise it is identical to the Wave format, but the internal file structure makes much larger file sizes possible. This is useful e.g. for long live recordings in surround format, where the audio files could become huge.
Broadcast Wave File	In terms of audio content, the same as regular Wave files, but with embedded text strings for supplying additional information about the file (see below).
AIFF File	Audio Interchange File Format, a standard defined by Apple Computer Inc. AIFF files have the extension ".aif" and are used on most computer platforms. Like Broadcast Wave files, AIFF files can contain embedded text strings (see below).

- If you select Broadcast Wave File or AIFF format, you can specify Author, Description and Reference text strings that will be embedded in the recorded file.

This is done on the Record–Broadcast Wave page in the Preferences dialog.

Record format (bit depth)

The available options are 16 bit, 24 bit and 32 bit float. Use the following guidelines:

- Normally, select the record format according to the bit depth delivered by your audio hardware.

For example, if your audio hardware has 20 bit A/D converters (inputs), you may want to record at 24 bit resolution, to capture the full bit depth. On the other hand, if your hardware has 16 bit inputs, it's pointless to record with a higher bit depth – this will only make the audio files larger, with no difference in audio quality. The exception is if you record with effects – see [page 60](#) for an example of this.

- The higher the bit depth, the larger the files and the more strain is put on the disk system.

If this is an issue, you may want to lower the record format setting.

Setting up the track

Creating a track and selecting the channel configuration

In Nuendo, audio tracks can be configured as mono, stereo or surround tracks, with almost any combination of channels (LCRS, 5.1, 7.1, 10.2 etc.). This allows you to record or import a file containing multiple channels and treat it as one entity, with no need to split it up into several mono files etc. The signal path for an audio track maintains its channel configuration all the way from the input bus, via EQ, level and other mixer settings to the output bus.

You specify the channel configuration for a track when you create it:

1. Select Add Audio Track from the Track list context menu or the Project menu (or double click in an empty area of the Track list when an audio track is selected – when a MIDI track is selected, double clicking in the Track list creates a new MIDI track).

A dialog appears with a channel configuration pop-up menu.

2. Select the desired format from the pop-up menu.

The most common formats are listed directly on the pop-up menu; the remaining surround formats are listed on the “More...” submenu. For a list of the available surround formats, see [page 281](#).

3. Click OK.

A track appears, set to the specified channel configuration. In the mixer, a corresponding channel strip appears. Note that you cannot change the channel configuration for a track.


Selecting an input bus for a track

Here we assume that you have added and set up the required input busses (see the chapter “[VST Connections: Setting up input and output busses](#)”). Before you record you need to specify from which input bus the track should record. You can do this in the Inspector or in the mixer:

- In the Inspector you select an input bus on the “in” pop-up menu in the top section.

As described on [page 86](#), the Inspector shows the settings for the selected track. You show or hide the Inspector using the Inspector icon on the Project window toolbar.

Click here to show/hide the Inspector.

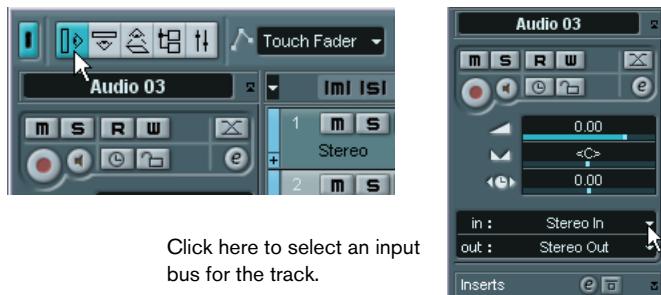

Click here to select an input bus for the track.

- In the mixer you select an input bus on the Input Routing pop-up menu at the top of the track's channel strip.

If this pop-up menu isn't shown, you need to click the Show Input and Output Settings field in the common panel to the left. See [page 183](#) for more about the mixer.



Click here to show or hide the input and output settings.

Click here to select an input bus for the track.

Selecting a folder for the recorded audio files

As described in the Getting Started book, each Nuendo project has a project folder containing (among other things) an “Audio” folder. By default, this is where recorded audio files are stored. However, you can select record folders independently for each audio track if needed:

1. To select the same record folder for several audio tracks, you need to select them by [Shift]- or [Ctrl]/[Command]-clicking in the Track list.
 2. Right-click (Win) or [Ctrl]-click (Mac) in the Track list for one of the tracks to bring up the track context menu.
 3. Select “Set Record Folder”.
 4. Use the file dialog that appears to navigate to the desired folder (or create a new folder with the Create button).
- Tip: if you want to have separate folders for different types of material (speech, ambient sounds, music, etc.) you can create subfolders within the Project’s “Audio” folder and assign different tracks to different subfolders. This way, all audio files will still reside within the project folder which will make managing the Project easier.
- It’s fully possible to have different tracks record to totally different locations, on different disks if you like. However, if you need to move or archive the Project, there is a risk of missing some files. The solution is to use the Prepare Archive function in the Pool to gather all external files into the project folder first – see [page 444](#).

Setting input levels

When recording digital sound, it's important to set the input levels correctly – loud enough to ensure low noise and high audio quality, but not so loud that clipping (digital distortion) occurs. When you record, clipping can occur in two places in the signal path:

- In the audio hardware, when an analog input signal is converted to digital format.
If the analog signal is too loud, it cannot be represented properly in a digital format (there will be no headroom). The result is clipping.
- When the audio signal is written to an audio file after passing through the input busses.

Since you can adjust levels, add EQ or effects in the input busses, it's possible to make the signal too loud at that stage. Again, the result will be clipping.

For this reason, you may need to check the input levels “in two steps”:

Checking the signal level coming into the audio hardware

To check the level of the “unprocessed” signal coming into the audio hardware you need to switch the level meters to “Input VU”. In this mode the input channel level meters will show the level of the signal at the input of the bus, before any adjustments such as input gain, EQ, effects, level or pan:

1. Right-click (Win) or [Ctrl]-click (Mac) in the Mixer window.
The Mixer context menu appears.
2. Select the VU-Meter Settings submenu and make sure “Input VU” is activated.
3. Play back the audio and check the level meter for the input channel.
The signal should be as loud as possible without exceeding 0 dB (the Clipping indicator for the input bus should not light up).



The Clipping indicator.

4. If necessary, adjust the input level in one of the following ways:
 - Adjust the output level of the sound source or external mixer.
 - Use the audio hardware's own application program to set the input levels, if this possibility is provided.
See the documentation for the audio hardware.
 - If your audio hardware supports the ASIO Control Panel function, it may be possible to make input level settings.
To open the ASIO control panel, open the Device Setup dialog on the Devices menu and click the Control Panel button on the Setup tab for the VST Multitrack device.

Instead of switching the level meter mode you can add an extra input bus using the same audio inputs (see [page 17](#)) and use this bus solely as a signal level meter (with "Post-Fader VU" mode always selected). This bus should then always be "zeroed" (gain and level set to 0.0 dB, no effects or EQ added) to show the level of the input signal.

Checking the signal level after the input bus

Internally, Nuendo processes audio at 32 bit float resolution, which makes it virtually impossible for clipping to occur. However, when the signal is written to a file on disk clipping can occur, depending on the selected record format (bit depth):

- If you record in 32 bit float format the bit depth will not be reduced – which means there's no risk of clipping at this stage.
Also, this preserves the signal quality perfectly. Therefore, you should consider using 32 bit float format when you are recording with effects (see [page 60](#)).
- If you record in 16 or 24 bit format the available headroom is lower which means clipping can occur if the signal is too loud.
To avoid this, set the signal level in the following way:
 1. Bring up the mixer context menu and select "Post-Fader VU" from the VU-Meter Settings submenu.
 2. Set up the input channel, adding EQ and/or effects as desired.
With some effects you may want to adjust the level of the signal going into the effect – use the Input Gain knob for this (note that you need to press [Shift] or [Alt]/[Option] to adjust the Input Gain).



3. Play back the audio and check the level meter of the input channel. The signal should be as loud as possible without exceeding 0 dB (the Clipping indicator for the input bus should not light up).
4. If necessary, use the input channel fader to adjust the signal level.

Monitoring

In this context, “monitoring” means listening to the input signal during recording. There are three fundamentally different ways to do this: via Nuendo, externally (by listening to the signal before it reaches Nuendo) or by using ASIO Direct Monitoring (which is a combination of both of the other methods – see [page 51](#)).

Monitoring via Nuendo

If you monitor via Nuendo, the input signal is mixed in with the audio playback. The advantage of this is that you can adjust the monitoring level and panning in the mixer, and add effects and EQ to the monitor signal just as during playback (using the track’s channel strip – not the input bus!). The disadvantage of monitoring via Nuendo is that the monitored signal will be delayed according to the latency value (which depends on your audio hardware and drivers). Therefore, monitoring via Nuendo requires an audio hardware configuration with a low latency value (see the Getting Started book).

- You can check the latency of your audio hardware in the Device Setup dialog (VST Multitrack page).
- **If you are using plug-in effects with large inherent delays, the automatic delay compensation function in Nuendo will increase the latency.**
If this is a problem you can use the Constrain Delay Compensation function while recording - see [page 268](#).

When monitoring via Nuendo, you can select one of four modes in the Preferences dialog (VST page):



- Manual.

This option allows you to turn input monitoring on or off by clicking the Monitor button in the Inspector, the Track list or in the mixer.

- While Record Enabled.

With this option you will hear the audio source connected to the channel input whenever the track is record enabled.

- While Record Running.

This option switches to input monitoring only during recording.

- Tapemachine Style.

This option emulates standard tapemachine behavior: input monitoring in Stop mode and during recording, but not during playback.

External monitoring

External monitoring (listening to the input signal before it goes into Nuendo) requires some sort of external mixer for mixing the audio playback with the input signal. This can be a stand-alone physical mixer or a mixer application for your audio hardware, if this has a mode in which the input audio is sent back out again (usually called "Thru", "Direct Thru" or similar).

When using external monitoring, you cannot control the level of the monitor signal from within Nuendo, or add VST effects or EQ to the monitor signal. The latency value of the audio hardware configuration does not affect the monitor signal in this mode.

- **If you want to use external monitoring, you need to make sure that monitoring via Nuendo isn't activated as well.**

Select the "Manual" monitoring mode in the Preferences dialog (VST page) and simply don't activate the Monitor buttons.

ASIO Direct Monitoring

If your audio hardware is ASIO 2.0 compatible, it may support ASIO Direct Monitoring. In this mode, the actual monitoring is done in the audio hardware, by sending the input signal back out again. However, monitoring is *controlled* from Nuendo. This means that the audio hardware's direct monitoring feature can be turned on or off automatically by Nuendo, just as when using internal monitoring.

- To activate ASIO Direct Monitoring, open the Device Setup dialog on the Devices menu and use the Direct Monitoring checkbox on the Setup tab for the VST Multitrack device.

If the checkbox is greyed out, your audio hardware (or its driver) doesn't support ASIO Direct Monitoring. Consult the audio hardware manufacturer for details.

- When ASIO Direct Monitoring is activated, you can select a monitoring mode in the Preferences dialog (VST page), as when monitoring via Nuendo (see [page 49](#)).
- Depending on the audio hardware, it may also be possible to adjust monitoring level and panning from the mixer.
Consult the documentation of the audio hardware if in doubt.
- VST effects and EQ cannot be applied to the monitor signal in this mode, since the monitor signal doesn't pass through Nuendo.
- Depending on the audio hardware, there may be special restrictions as to which audio outputs can be used for direct monitoring.
For details on the routing of the audio hardware, see its documentation.
- The latency value of the audio hardware configuration does not affect the monitor signal when using ASIO Direct Monitoring.

Recording

Recording is done using any of the general recording methods (see [page 39](#)). After you finish recording, an audio file has been created in the Audio folder within the project folder. In the Pool, an audio clip is created for the audio file, and an audio event that plays the whole clip appears on the recording track. Finally, a waveform image is calculated for the audio event. If the recording was very long, this may take a while.

- **If the option “Create Audio Images During Record” is activated in the Preferences dialog (Record page), the waveform image will be calculated and displayed during the actual recording process.**

This real-time calculation uses some processing power – if your processor is slow or you are working on a CPU-intensive project you should consider turning this option off.

Undoing recording

If you decide that you don't like what you just recorded, you can delete it by selecting Undo from the Edit menu. The following will happen:


- The event(s) you just created will be removed from the Project window.
- The audio clip(s) in the Pool will be moved to the Trash folder.
- The recorded audio file(s) will not be removed from the hard disk.

However, since their corresponding clips are moved to the Trash folder, you can delete the files by opening the Pool and selecting “Empty Trash” from the Pool menu.

Recording overlapping events

The basic rule for audio tracks is that each track can play back a single audio event at a time. This means that if two or more events are overlapping, only one of them will be heard at any given time.

What happens when you record overlapping events (record in an area where there's already events on the track) depends on the Linear Record Mode setting on the Transport panel:

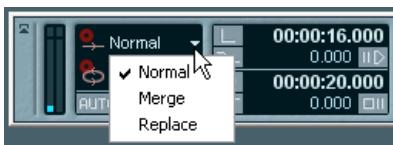

- In "Normal" or "Merge" mode, recording where something has already been recorded creates a new audio event that overlaps the previous one(s).

When you record audio there is no difference between "Normal" and "Merge" mode – the difference only applies to MIDI recording (see [page 68](#)).

- In "Replace" mode, existing events (or portions of events) that are overlapped by the new recording will be removed.

This means that if you record a section in the middle of a longer existing recording, that original event will be cut into two events with a gap for the new event.



Which event will be heard?

If two or more events are overlapping, you will only hear the events (or portions of events) that are actually visible. Overlapped (hidden) events or sections are not played back.

- The functions "Move to Front" and "Move to Back" on the Edit menu (see [page 118](#)) are useful for managing overlapping events, as is the "To Front" function (see below).

Recording audio in cycle mode

If you are recording audio in cycle mode, the result depends on two factors:

- The Cycle Record Mode setting on the Transport panel.
- The “Audio Cycle Record Mode” setting in the Preferences dialog (Record page).

Cycle Record Modes on the Transport panel



There are four different modes on the Transport panel, but the differences between two of the modes only apply to MIDI recording. For audio cycle recording, the following applies:

- If “Keep Last” is selected, the last complete “take” (the last completely recorded lap) is kept as an audio event.

In reality, all laps you recorded are saved in one audio file divided into regions – one region for each take. You can easily select a previous take for playback – this is done as when recording in “Create Regions” mode (see [page 56](#)).

- If “Stacked” is selected, each take will appear as an event on a separate “lane” on the track.

This is useful when you want to view and edit the different takes and eventually combine them to one recording. In this mode, the Audio Cycle Record Mode preference doesn't matter. See [page 58](#).

- If any of the other cycle recording modes is selected, the result depends entirely on the Audio Cycle Record Mode setting in the Preferences.

These options are described below.

Create Events mode (Preferences)




When Audio Cycle Record Mode (Preferences–Record page) is set to “Create Events”, the following will happen when you record audio in cycle mode:

- One continuous audio file is created during the entire recording process.
- For each recorded lap of the cycle, one audio event is created. The events will have the name of the audio file plus the text “Take **”, where “**” indicates the number of the take.
- The last take (the last recorded lap) will be on top (and will thus be the one you hear when you activate playback).

To select another take for playback, proceed as follows:

1. Right-click (Win) or [Ctrl]-click (Mac) the event and select “To Front” from the pop-up menu that appears.
A submenu appears, listing all the other (obscured) events.

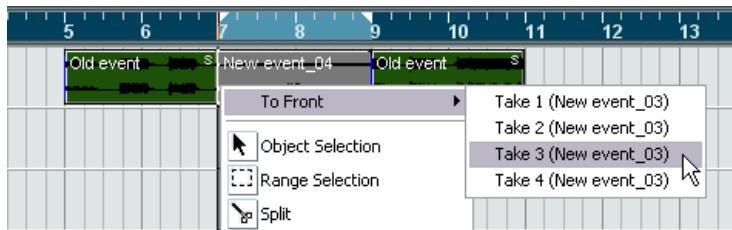


2. Select the desired take.
The corresponding event is brought to front.

This method allows you to quickly combine the best parts of each take, in the following way:

1. Use the Scissors tool to split the events in several sections, one for each part of the take.

For example, if you recorded four lines of vocals (in each take), you can split the events so that each line gets a separate event.

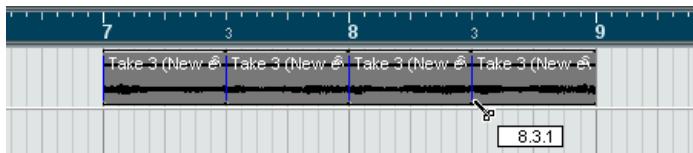

The events after splitting. Note that since the original take events overlap each other, clicking with the Scissors tool will split all takes at the same position.

2. For each section of the take, use the “To Front” function to bring the best take to the front.

This way, you can quickly combine the best sections of each take, using the first vocal line from one take, the second line from another take and so on.

You can also compile a “perfect” take in the Audio Part Editor, as described on [page 398](#).

Create Regions mode (Preferences)


When Audio Cycle Record Mode (Preferences–Record page) is set to “Create Regions”, the following will happen when you record audio in cycle mode:

- One continuous audio file is created during the entire recording process.
- The audio event in the Project window shows the name of the audio file plus the text “Take **” (with “**” being the number of the last completed cycle lap).
- If you play back the recorded event, you will only hear what was recorded during the last lap of the cycle recording.

The previous “takes” recorded in the cycle are still available, however.

- The audio clip is divided into regions (called takes), one for each lap of the cycle that was recorded.


If you locate the audio file you just recorded in the Pool, and click on the plus sign beside it, you can see the regions that have been created, one for each lap of the cycle that was completed during recording.

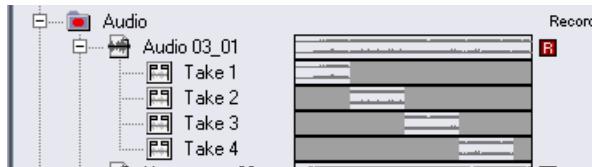

"Take" regions in the Pool window.

To play back the different "takes", proceed as follows:

1. In the Project window, right-click (Win) or [Ctrl]-click (Mac) the event that was created during cycle recording.
The Quick menu appears.
2. Select the "Set To Region" menu item.
A submenu appears with the takes you recorded during cycle record.
3. Now you can freely select any of the takes from the submenu and it will replace the previous take event in the Project window.

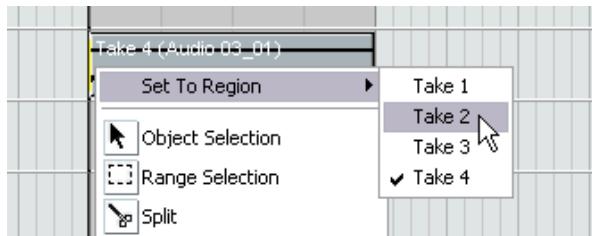

Use this method to listen through the various takes. Select the best single take, or compile a "perfect" take by cutting out the best bits from each take and putting them together (see [page 398](#)).


Create Events + Regions mode (Preferences)

In this mode, both events and regions are created. If you work with the takes as events in this mode, you can edit the events freely (e.g. splitting them as described on [page 55](#)). However, in case you want to go back to the original takes, they are still available as regions (on the "Set To Region" submenu, in the Pool or in the Sample Editor).

Recording audio in Stacked mode

When you record audio in cycle mode and the “Stacked” Cycle Record Mode is selected on the Transport panel, the following happens:

- Each complete recorded cycle lap is turned into a separate audio event.
- The track is divided into “lanes”, one for each cycle lap.
- The events are stacked above each other, each on a different lane.

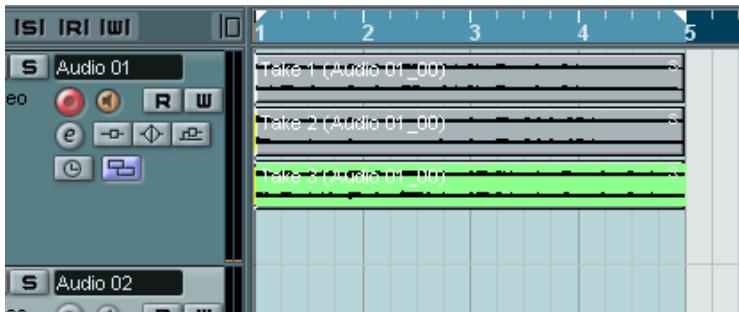

This makes it easy to create a “perfect take” by combining the best parts from the different cycle laps:


1. Zoom in so you can work comfortably with the stacked events.

If you play back the recorded section, only the lowest (last) take will be heard.

2. To audition another take, either mute the lower take(s) with the Mute tool or move the takes between the lanes.

This can be done by dragging or by using the functions Move to Next Lane/Previous Lane on the Quick menu or Edit menu.


3. Edit the takes so that only the parts you want to hear can be heard.
You can cut events with the Scissors tool, resize them, mute them or delete them.

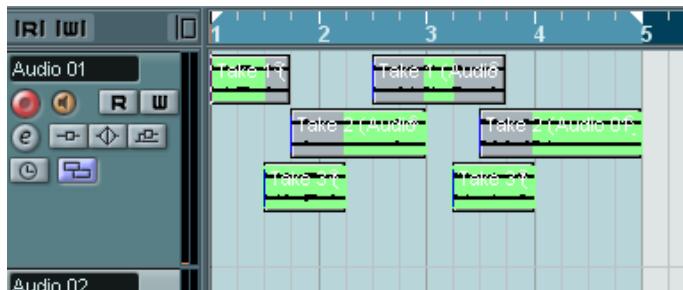

The sections that will be heard are indicated in green.

4. When you are satisfied with the result, select all events on all lanes and select “Delete Overlaps” from the Advanced submenu on the Audio menu.

This puts all events back on a single lane and resizes events so that overlapped sections are removed.

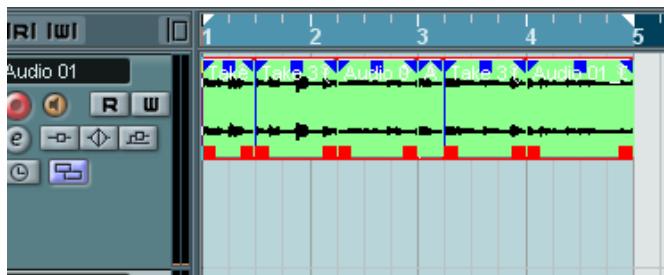

5. To turn off the lane display mode for the track, click the Lane Display Type button in the track list and select “Lanes Off”.
If the button is hidden, you can bring it to view in the Track Controls Settings dialog – see [page 714](#).



The Lane Display Type button.

Recording with effects

Normally you record the audio signals “dry” and add effects non-destructively during playback as described in the chapter “[Audio effects](#)”.

However, Nuendo also allows you to add effects (and/or EQ) directly while you are recording. This is done by adding insert effects and/or making EQ settings for the input channel in the mixer. Note:

- **This will make the effects become part of the audio file itself – you cannot change the effect settings after recording.**

About the record format

When you record with effects you should consider setting the record format (bit depth) to 32 Bit Float. This is done in the Project Setup dialog on the Project menu. Note that this isn't required in any way – you can record with effects in 24 or 16 Bit format should you so like. However, there are two advantages to 32 Bit Float format:

- With 32 Bit Float recording you don't risk clipping (digital distortion) in the recorded files.

This can of course be avoided with 24 or 16 Bit recording as well, but requires more care with the levels.

- Nuendo processes audio internally in 32 Bit Float format – recording in the same format means the audio quality will be kept absolutely pristine.


The reason is that the effect processing in the input channel (as well as any level or EQ settings you make there) is done in 32 Bit Float format. If you record at 16 or 24 Bit, the audio will be converted to this lower resolution when it's written to file – with possible signal degradation as a result.

Note also that it doesn't matter at which actual resolution your audio hardware works. Even if the signal from the audio hardware is in 16 Bit resolution, the signal will be 32 Bit Float after the effects are added in the input channel.

An example

This example shows how to apply the DeNoiser noise reduction effect while recording. This could be useful if you are recording noisy material (e.g. from an old tape or vinyl record). Note that this is only an example – you could add any effect (or any combination of effects) to a recording in the same way.

1. Set up an audio track for recording and select the desired input bus. Also, for best results you should activate monitoring as this allows you to hear and try out your settings before actually recording. See [page 49](#) for a description of monitoring via Nuendo.
 2. Open the Mixer and make sure the full extended view is shown.

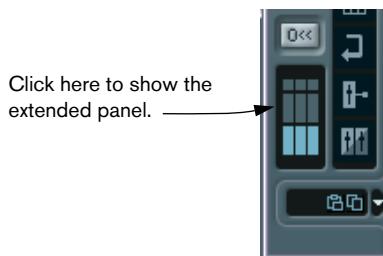


- 3. Locate the input channel (bus) from which you record.**
If the input channels are hidden, click on the Show/Hide Input Channels button to the left.



4. Check the input level (of the signal coming into the audio hardware) as described on [page 47](#) and adjust the level of the source audio if necessary.

- Pull down the View Options pop-up menu for the input channel and select "Inserts".

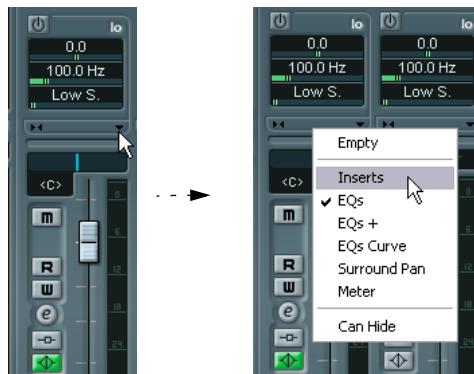

The View Options pop-up menu is opened by clicking the arrow button between the fader panel and the extended panel.

Now the extended panel for the input channel shows the insert slots.

- Click on an insert slot and select an effect from the pop-up menu that appears.

As you see, the included effects are sorted into submenus – you will find the DeNoiser effect on the "Restoration" submenu.

The effect is loaded and activated and its control panel is automatically opened.



- Play back a bit of your source audio to let the DeNoiser analyze the material and "learn" the signal.

- 8.** Use the Offset slider to set the light green line in the display just above the yellow noise floor graph.
 - 9.** Play back the source audio and use the Reduction and Ambience sliders to set the optimum noise reduction.
The Reduction slider governs the amount of noise reduction – lower it to remove more noise. The Ambience slider helps restoring the natural ambience in the audio which can otherwise be lost in the noise reduction process – raise this a bit if you find the sound lifeless or sterile. For more on the DeNoiser parameters, see the separate Audio Effects pdf.
- 10.** When the effect is set up as desired, you should check the level of the input channel (by setting the VU Meters to post-fader, see [page 48](#)). Use the input channel fader to adjust the level if needed.
- 11.** Activate recording.
- 12.** When you're finished you can play back the recorded audio track.
As you can hear, the noise reduction you applied is now a part of the actual audio file.
- 13.** If you don't want to record more with the same plug-in, you should deactivate it by clicking in the insert slot and selecting "No Effect".

MIDI Recording Specifics

Activating MIDI Thru

As described in the Getting Started book, the normal way to work with MIDI is to have MIDI Thru activated in Nuendo, and Local Off selected in your MIDI Instrument(s). In this mode, everything you play during recording will be “echoed” back out again on the MIDI output and channel selected for the recording track.

1. Make sure the option “MIDI Thru Active” is activated in the Preferences dialog (MIDI page).
2. Record enable the track(s) on which you want to record.

Now, incoming MIDI is “echoed” back out again, for all record enabled MIDI tracks.



Record Enable button. Monitor button.

- If you just want to use the Thru function for a MIDI track without recording, activate the monitor button for the track instead.

This is useful e.g. if you want to try out different sounds or play a VST instrument in real time without recording your playing.

Setting MIDI channel, input and output

Setting the MIDI channel in the instrument

Most MIDI synthesizers can play several sounds at the same time, each on a different MIDI channel. This is the key to playing back several sounds (bass, piano etc.) from the same instrument. Some devices (such as General MIDI compatible sound modules) always receive on all 16 MIDI channels. If you have such an instrument, there's no specific setting you need to make in the instrument. On other instruments you will have to use the front panel controls to set up a number of “Parts”, “Timbres” or similar so that they receive on one MIDI channel each.

See the manual that came with your instrument for more information.

Naming MIDI ports in Nuendo

MIDI inputs and outputs can often be shown with unnecessarily long and complicated names. If you wish, you can rename your MIDI ports to more descriptive names:

1. Open the Device Setup dialog from the Devices menu.
2. Select the Windows MIDI or DirectMusic (Win) or MIDI System (Mac) device in the Device list.
The available MIDI inputs and outputs are listed on the Setup tab. Under Windows, which device to choose depends on your system.
3. To change the name of a MIDI port, click in the Device column and type in a new name.

After closing the dialog, the new names will appear on the MIDI "in:" and "out:" pop-ups.

Setting the MIDI input in the Inspector

You select MIDI inputs for tracks in the Inspector – the area to the left of the Track list in the Project window:

1. If the Inspector is hidden, click the Show Inspector button on the toolbar.



2. Select the track by clicking in the Track list.


The Inspector shows the settings for the selected track (for details, see [page 86](#)).

3. Click the icon in the upper right corner of the Inspector to make sure the topmost section is shown.



4. Pull down the “in” pop-up menu and select an input.

The available MIDI inputs are shown. The items on the menu depend on the type of MIDI interface you are using etc.

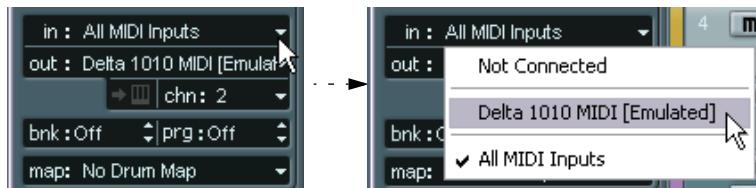

- If you select the “All MIDI Inputs” option, the track will receive MIDI data from all available MIDI inputs.
- If you hold down [Ctrl]/[Command] and select a MIDI input, this is selected for all MIDI tracks.

Setting the MIDI channel and output

The MIDI channel and output settings determine where the recorded MIDI is routed during playback, but are also relevant for MIDI Thru in Nuendo. Channel and output can be selected in the Track list or in the Inspector. The procedure below describes how to make the settings in the Inspector, but it can be done in largely the same manner in the Track list as well.

1. To show the settings in the Inspector, proceed as when selecting a MIDI input (see above).


2. Pull down the “out:” pop-up menu and select an output.

The available MIDI outputs are shown. The items on the menu depend on what type of MIDI interface you are using etc.



- If you hold down [Ctrl]/[Command] and select a MIDI output, this is selected for all MIDI tracks.

3. Use the “chn” pop-up menu to select a MIDI channel for the track.

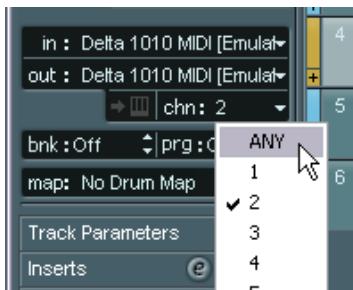

- If you set the track to MIDI channel “Any”, each MIDI event on the track will be sent out on the channel stored in the event itself. In other words, the MIDI material will be played back on the channel(s) used by the MIDI input device (the MIDI instrument you play during recording).

Selecting a sound

You can select sounds from within Nuendo, by instructing the program to send Program Change and Bank Select messages to your MIDI device. This is done using the “prg” and “bnk” value fields in the Inspector or Track list.



Program Change messages give access to 128 different program locations. If your MIDI instruments have more than 128 programs, Bank Select messages (set in the “bnk” value field) allow you to select different banks, each containing 128 programs.

- Bank Select messages are recognized differently by different MIDI instruments. Also, the structure and numbering of banks and programs may vary. Consult the documentation of your MIDI instruments for details.**
- Note that it is also possible to select sounds by name. For descriptions of how to set this up, see the separate “MIDI devices and features” pdf document.**

Recording

Recording MIDI is done according to the basic recording methods (see [page 39](#)). When you finish recording, a part containing MIDI events is created in the Project window.

About overlap and the Rec Mode setting

MIDI tracks are different from audio tracks when it comes to overlapping parts:

- **All events in overlapping parts are always played back.**

If you record several parts at the same locations (or move parts so that they overlap), you will hear the events in all parts on playback, even though some of the parts are obscured in the Project window.

When recording overlapping parts, the result depends on the Rec Mode setting on the Transport panel:

- If Rec Mode is set to “Normal”, overdub recording works as with audio tracks, i.e. if you record again where something has already been recorded, you get a new part that overlaps the previous one(s).
- If Rec Mode is set to “Merge”, the overdubbed events are added to the existing part.
- If Rec Mode is set to “Replace”, the new recording replaces any existing events in the area on that track.

About punch in and out on MIDI tracks

Performing and setting up manual and automatic punch in/out recording for MIDI tracks is done in exactly the same way as for audio tracks. There is one thing to note, however:

- Punching in and out on recordings with Pitch Bend or controller data (modulation wheel, sustain pedal, volume etc.) may lead to strange effects (apparently hanging notes, constant vibrato etc.).
If this happens, you may need to use the Reset item on the MIDI menu (see [page 72](#)).

About the Auto Quantize function

If Auto Quantize is activated on the Transport panel (the “Auto Q” button), the notes you record are automatically quantized according to the current Quantize settings. For more information about quantizing, see [page 469](#).

Recording MIDI in cycle mode

When you record MIDI in cycle mode, the result depends on which Cycle Record mode is selected on the Transport panel:

Cycle Rec mode: Mix (MIDI)

For each completed lap, everything you record is added to what was previously recorded, in the same part. This is useful for building up rhythm patterns, for example. Record a hi-hat part on the first lap, the bass drum part on the second lap etc.

Cycle Rec mode: Overwrite (MIDI)

As soon as you play a MIDI note (or send any MIDI message) all MIDI you have recorded on previous laps is overwritten – *from that point on* in the part. An example:

1. You start recording in an eight bar cycle.
2. The first take wasn't good enough – you start directly with a new take on the next cycle lap and overwrite the first take.
3. After recording the second take you let the recording roll on and listen, without playing anything.
You find that the take was good up until bar seven, for example.
4. On the next lap, you wait until bar seven and start playing.
This way you will overwrite the last two bars only.
5. Make sure you stop playing before the next lap begins – otherwise you will overwrite the entire take.

Cycle Rec mode: Keep Last

Each completed lap replaces the previously recorded lap. Note:

- The cycle lap must be completed – if you deactivate recording or press Stop before the cursor reaches the right locator, the previous take will be kept.
- If you don't play or input any MIDI during a lap, nothing happens (the previous take will be kept).

Cycle Rec mode: Stacked

In this mode, the following happens:

- Each recorded cycle lap is turned into a separate MIDI part.
- The track is divided into “lanes”, one for each cycle lap.
- The parts are stacked above each other, each on a different lane.
- All takes but the last one are muted.



This makes it easy to create a “perfect take” by combining the best parts from the different cycle laps. You can edit the parts in the Project window (by cutting, resizing and deleting) or you can use a MIDI editor as in the following example:

1. Unmute the muted takes by clicking the parts with the Mute tool.
2. Select all takes (parts) and open them in the Key Editor for example.
3. Use the part list pop-up menu on the toolbar to select which part to edit.
See [page 490](#).
4. Remove or edit notes as desired.
5. When you are happy with the result, close the editor.
6. To turn it all into a single MIDI part (containing your “perfect take”), select all parts and select Merge MIDI in Loop from the MIDI menu.
7. In the dialog that appears, activate the Erase Destination option and click OK.

The remaining events in the parts are merged together into a single part.

Recording different types of MIDI messages

- You can decide exactly which event types should be recorded by using the MIDI filters – see [page 75](#).
-

Notes

With MIDI, when you press and release a key on your synth or other MIDI keyboard, a Note On (key down) and a Note Off (key up) message are sent out. The MIDI note message also contains the information which MIDI channel was used. Normally, this information is overridden by the MIDI channel setting for the track, but if you set the track to MIDI channel "Any", the notes will be played back on their original channels.

Continuous messages

Pitch bend, aftertouch and controllers (like modulation wheel, sustain pedal, volume etc.) are considered as MIDI continuous events (as opposed to the momentary key down and key up messages). If you move the Pitch bend wheel on your synthesizer while recording, this movement is recorded together with the key (Note On and Note Off messages), just as you'd expect. But the continuous messages can also be recorded after the notes have been recorded (or even before). They can also be recorded on their own tracks, separately from the notes to which they belong.

Say for instance that you record one or several bass parts on track 2. If you now set another track, like track 55, to the same output and MIDI channel as track 2 you can make a separate recording of just pitch bends for the bass parts. This means that you activate recording as usual and only move the pitch bend wheel during the take. As long as the two tracks are set to the same output and MIDI channel it will appear to the MIDI instrument as if the two recordings were made at the same time.

Program Change messages

Normally, when you switch from one program to another on your keyboard (or whatever you use to record), a number corresponding to that program is sent out via MIDI as a Program Change message. These can be recorded on the fly with the music, recorded afterwards on a separate track, or manually entered in the Key or List Editors.

System Exclusive messages

System Exclusive (SysEx) is a special type of MIDI message used to send data that only makes sense to a unit of a certain make and type. Every major MIDI manufacturer has its own SysEx identity code and these are part of practically all SysEx messages. SysEx can be used to transmit a list of the numbers that make up the settings of one or more sounds in a synth. For more about viewing and editing SysEx messages, see the separate “MIDI devices and features” document.

The Reset function

The Reset function on the MIDI menu sends out note-off messages and resets controllers on all MIDI channels. This is sometimes necessary if you experience hanging notes, constant vibrato, etc.

- Nuendo can also automatically perform a MIDI reset during playback (after each part) and/or on stop.

You turn these functions on or off in the Preferences dialog (MIDI page).

Retrospective Record

This feature allows you to capture any MIDI notes you play in Stop mode or during playback and turn them into a MIDI part “after the fact”. This is possible due to the fact that Nuendo can capture MIDI input in buffer memory, even when not recording.

Proceed as follows:

1. Enable the Retrospective Record function in the Preferences dialog (Record page).
This activates the buffering of MIDI input, making Retrospective Record possible.
2. Make sure a MIDI track is record enabled.
3. When you have played some MIDI material you want to capture (either in Stop mode or during playback), select Retrospective Record from the Transport menu (or use the key command, by default [Shift]-[Pad*]).

The contents of the MIDI buffer (i.e. what you just played) is turned into a MIDI part on the record enabled track. The part will appear where the project cursor was when you started playing – this means that if you played along during playback, the captured notes will end up exactly where you played them in relation to the project.

- The Retrospective Record Buffer Size setting in the Preferences dialog (Record page) determines how much data can be captured.

MIDI Preferences

The following options and settings in the Preferences dialog affect MIDI recording and playback:

MIDI page

- **Length Adjustment**

Adjusts the length of notes so that there always is a short time between the end of one note and the start of another (of the same pitch and on the same MIDI channel). You set the time in ticks. By default there are 120 ticks per 1/16 note, but you can adjust this with the MIDI Display Resolution setting on the same page.

Record page

- **Snap MIDI Parts to Bars**

When this is activated, recorded MIDI parts will automatically be lengthened to start and end at whole bar positions. If you are working in a Bars+Beats-based context, this can make editing (moving, duplicating, repeating, etc.) easier.

- **Solo Record in MIDI Editors**

If this is activated and you open a part for editing in a MIDI editor, its track is automatically record enabled. Furthermore, Record Enable is deactivated for all other MIDI tracks until you close the editor again.

This makes it easier to record MIDI data when you're editing a part – you will always be sure the recorded data ends up in the edited part and not on any other track.

- **MIDI Record Catch Range in ms**

When you record starting at the left locator, this setting helps you make sure the very start of the recording is included. A very annoying scenario is when you have recorded a perfect MIDI take, only to find out that the very first note wasn't included – because you started playing a little bit too early! If you raise the Record Catch Range, Nuendo will catch the events played just before the recording start point, eliminating this problem.

Filtering MIDI



The MIDI–MIDI Filter page in the Preferences dialog allows you to prevent certain MIDI messages from being recorded and/or “thruput” (echoed by the MIDI Thru function).

The dialog is divided into four sections:

Section	Description
Record	Activating any of these options prevents that type of MIDI message from being recorded. It will, however, be thruput, and if already recorded, it will play back normally.
Thru	Activating any of these options prevents that type of MIDI message from being thruput. It will, however, be recorded and played back normally.
Channels	If you activate a channel button, no MIDI messages on that MIDI channel will be recorded or thruput. Already recorded messages will, however, be played back normally.
Controller	Allows you to prevent certain MIDI controller types from being recorded or thruput. To filter out a controller type, select it from the list at the top of the Controller section and click “Add”. It will appear on the list below. To remove a controller type from the list (allow it to be recorded and thruput), select it in the lower list and click “Remove”.

Options and Settings

Recording-related Preferences

A couple of settings in the Preferences dialog (Transport page) are relevant for recording. Set these according to your preferred method of work:


Deactivate Punch In on Stop

If this is activated, punch in on the Transport panel is automatically deactivated whenever you enter Stop mode.

Stop after Automatic Punch Out

If this is activated, playback will automatically stop after automatic punch out (when the project cursor reaches the right locator and punch out is activated on the Transport panel). If the postroll value on the Transport panel is set to a value other than zero, playback will continue for the set time before stopping (see below).

About Preroll and Postroll

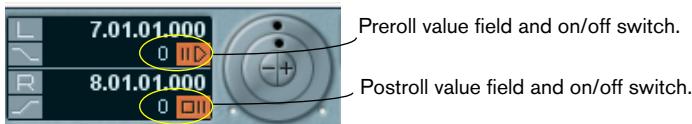

The preroll and postroll value fields (below the left/right locator fields) on the Transport panel have the following functionality:

- By setting a preroll value, you instruct Nuendo to “roll back” a short section whenever playback is activated.
This applies whenever you start playback, but is perhaps most relevant when recording from the left locator (punch in activated on the Transport panel) as described below.
- By setting a postroll value, you instruct Nuendo to play back a short section after automatic punch out, before stopping.
This is only relevant when punch out is activated on the Transport panel and “Stop after Automatic Punchout” is activated in the Preferences dialog (Transport page).
- To turn pre- or postroll on or off, click the corresponding button on the Transport panel (next to the pre/postroll value) or use the “Use Preroll” and “Use Postroll” options on the Transport menu.

An example:

1. Set the locators to where you want to start and end recording.
2. Activate punch in and punch out on the Transport panel.
3. Activate the option “Stop after Automatic Punchout” in the Preferences dialog (Transport page).
4. Set suitable preroll and postroll times by clicking in the corresponding fields on the Transport panel and typing in time values.
5. Activate pre- and postroll by clicking the buttons next to the preroll and postroll times so that they light up.
6. Activate recording.

The project cursor “rolls back” by the time specified in the preroll field and playback starts. When the cursor reaches the left locator, recording is automatically activated. When the cursor reaches the right locator, recording is deactivated, but playback continues for the time set in the postroll field before stopping.

Using the metronome

The metronome will output a click that can be used as a timing reference. The two parameters that govern the timing of the metronome are tempo and time signature, and these are edited in the Tempo Track window (see [page 554](#)).


You can use the metronome for a click during recording and/or playback or for a precount (count-in) that will be heard when you start recording from Stop mode. Click and precount are activated separately:

- To activate the metronome, click the Click button on the Transport panel. You can also select “Metronome On” from the Transport menu or use the corresponding key command (by default [C]).
- To activate the precount, click the Precount button on the Transport panel. You can also select “Precount On” from the Transport menu or set up a key command for this.



Metronome settings

You make settings for the metronome in the Metronome Setup dialog, opened from the Transport menu.

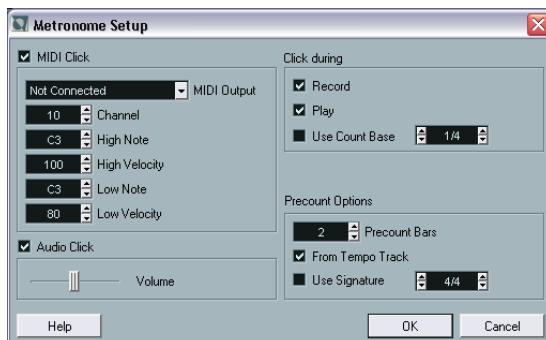

The metronome can use either an audio click played back via the audio hardware, send MIDI data to a connected device which will play back the click or do both.

The following metronome settings can be made in the dialog:

Parameter	Description
MIDI Click on/off	Selects whether or not the metronome will sound via MIDI.
MIDI Output	Use the pop-up to select a MIDI output for the metronome click.
Channel	Selects the MIDI channel for the metronome click.
High Note	Sets the MIDI note number for the “high note” (the first beat in a bar).
High Velocity	Sets the velocity value for the “high note” (the first beat in a bar).
Low Note	Sets the MIDI note number for the “low note” (the other beats).
Low Velocity	Sets the velocity value for the “low note” (the other beats).
Audio Click on/off	Selects whether or not the metronome will sound via the audio hardware.
Audio Click Volume slider	Adjusts the volume for the audio click.
Click during	Allows you to specify whether the metronome should be heard during playback, recording or both (when Click is activated on the Transport panel).
Use Count Base	If this option is activated, you use the field to the right to specify the “rhythm” of the metronome. Normally, the metronome plays one click per beat, but setting this to e.g. “1/8” gives you eighth notes – two clicks per quarter note beat. It’s also possible to create unusual metronome rhythms such as triplets etc.
Precount Bars	Sets the number of bars the metronome will count in before it starts recording if precount is activated on the Transport panel.
From Tempo Track	When this is activated, the precount will be in the time signature set in the Tempo track. Furthermore, any tempo changes in the Tempo track during the precount will be applied.
Use Signature	If “From Tempo Track” is deactivated, you can use these fields to set a time signature for the precount. In this mode, tempo changes in the Tempo track won’t affect the precount.

5

The Project window

Background

The Project window is the main window in Nuendo. This provides you with an overview of the project, allowing you to navigate and perform large scale editing. Each project has one Project window.

About tracks

The Project window is divided vertically into tracks, with a timeline running horizontally from left to right. The following track types are available:

Track type	Description
Audio	For recording and playing back audio events and audio parts. Each audio track has a corresponding audio channel in the mixer. An audio track can have any number of automation “subtracks” for automating mixer channel parameters, insert effect settings etc.
Folder	Folder tracks function as containers for other tracks, making it easier to organize and manage the track structure. They also allow you to edit several tracks at the same time. See page 141 .
FX Channel	FX channel tracks are used for adding send effects. Each FX channel can contain up to eight effect processors – by routing effect sends from an audio channel to an FX channel, you send audio from the audio channel to the effect(s) on the FX channel. Each FX channel has a corresponding channel strip in the mixer – in essence an effect return channel. See page 242 for more about FX Channel tracks and send effects. An FX channel can also have any number of automation subtracks for automating mixer channel parameters, effect settings etc. All FX channel tracks are automatically placed in a special FX channel folder in the Track list, for easy management.
Group Channel	By routing several audio channels to a Group channel, you can submix them, apply the same effects to them, etc. (see page 219). A Group channel track contains no events as such, but displays settings and automation curves for the corresponding Group channel. Each Group channel track has a corresponding channel strip in the mixer. In the Project window, Group channels are organized as subtracks in a special Group Tracks folder.
MIDI	For recording and playing back MIDI parts. Each MIDI track has a corresponding MIDI channel strip in the mixer. A MIDI track can have any number of automation “subtracks” for automating mixer channel parameters, insert and send effect settings etc.

Track type	Description
Marker	The Marker track displays markers, and allows you to move and rename them directly in the Project window (see page 154). There can only be one Marker track in the project.
Ruler	Ruler tracks contain additional rulers, displaying the timeline from left to right. You can use any number of ruler tracks, each with a different display format if you wish. See page 94 for more information about the ruler and the display formats.
Video	For playing back video events. A project can only have one Video track.

About parts and events


Events are the basic building blocks in Nuendo. Different event types are handled differently in the Project window:

- Video events and automation events (curve points) are always viewed and rearranged directly in the Project window.
- MIDI events are always gathered in MIDI parts, containers for one or more MIDI events. MIDI parts are rearranged and manipulated in the Project window. To edit the individual MIDI events in a part, you have to open the part in a MIDI editor (see [page 488](#)).
- Audio events can be displayed and edited directly in the Project window, but you can also work with audio parts containing several events. This is useful if you have a number of events which you want to treat as one unit in the project.



An audio event and an audio part.


Window Overview

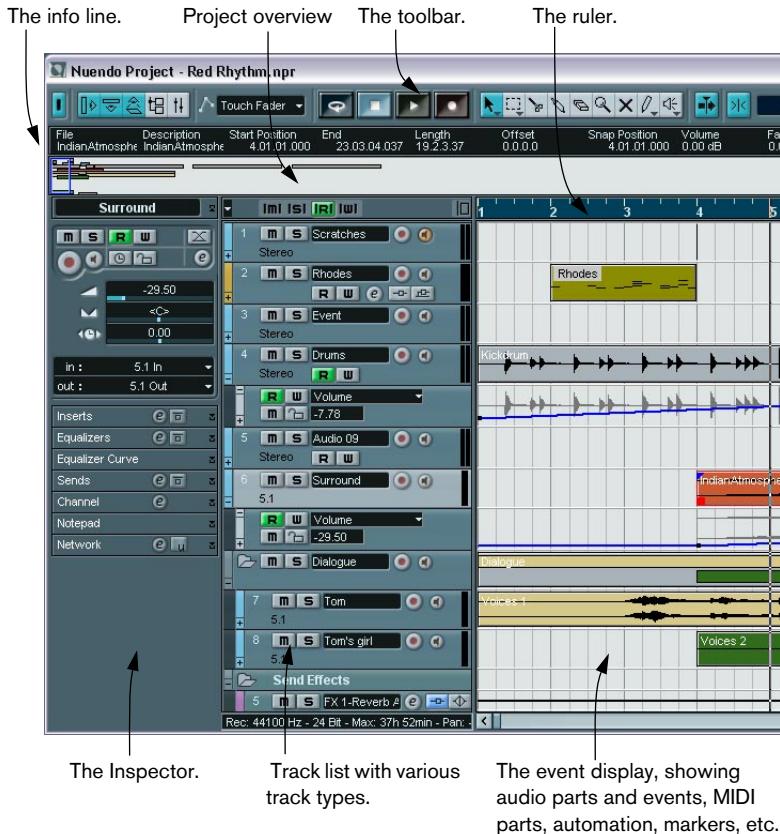


The Track list

The Track list is the area to the left in the Project window. It contains name fields and various settings for the tracks. Different track types have different controls in the Track list. To see all the controls you may have to resize the track in the Track list (see [page 100](#)):


- The Track list area for an audio track:

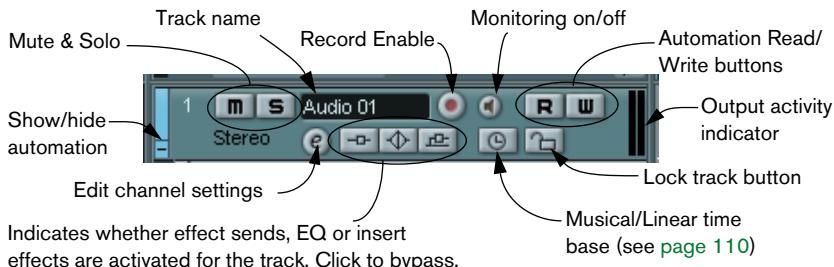

- The Track list area for an automation subtrack (revealed by clicking the + button on a track):

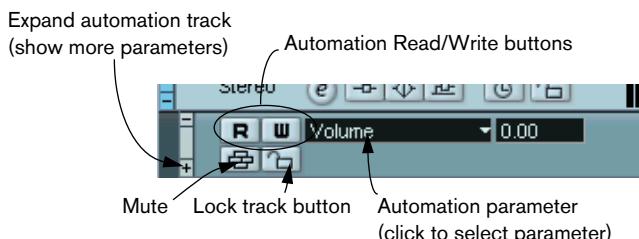

- The Track list area for a MIDI track:

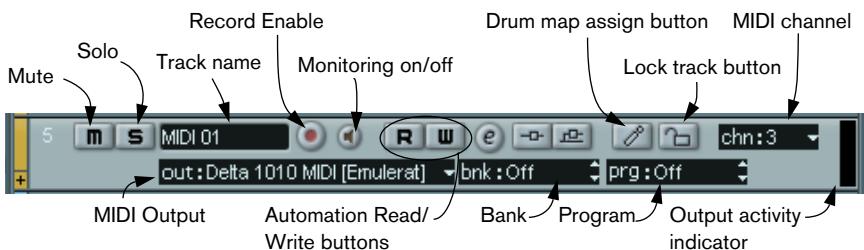

The Inspector


The area to the left of the Track list is called the Inspector. This shows additional controls and parameters for the track you have selected in the Track list. If several tracks are selected (see [page 106](#)), the Inspector shows the setting for the first (topmost) selected track.

To hide or show the Inspector, click the Inspector icon in the toolbar.



The Inspector icon.

- For most track classes, the Inspector is divided into a number of sections, each containing different controls for the track. You can hide or show sections by clicking the tabs in their top right corner. Clicking the tab for a hidden section brings it to view and hides the other sections. [Ctrl]/[Command]-clicking the tab allows you to hide or show a section without affecting other sections. Finally, [Alt]/[Option]-clicking a tab shows or hides all sections in the Inspector.

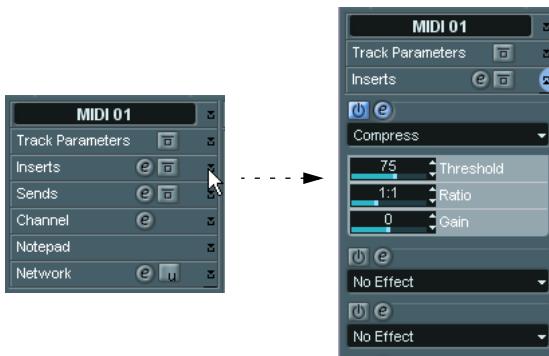

- Folding a section does not affect the functionality but merely hides the section from view.**

In other words, if you have set up a track parameter or activated an effect for example, your settings will still be active even if you fold the Inspector section.

Which sections are available in the Inspector depends on the selected track's class.

Sections



In general, the Inspector contains the same controls as the Track list, but there are also some additional buttons and parameters. Below is a list of all common, possible settings and sections, their controls and usage, followed by descriptions of which sections are actually available for each type of track:

Parameter	Description
Auto Fades Settings button	Opens a dialog in which you can make separate Auto Fade settings for the track. See page 179 .
Edit button	Opens the Channel Settings window for the track, allowing you to view and adjust effect and EQ settings, etc. See page 209 .
Volume	Use this to adjust the level for the track. Changing this setting will move the track's fader in the mixer window, and vice versa. See page 199 to learn more about setting levels.
Pan	Use this to adjust the panning of the track. As with the Volume setting, this corresponds to the Pan setting in the mixer.
Delay	This adjusts the playback timing of the audio track. Positive values delay the playback while negative values cause the track to play earlier. The values are set in milliseconds.
In	This lets you specify which Input bus the track should use (see page 14 for information about Input busses).

Parameter	Description
Out	Here, you decide to which output bus (see page 14) the track should be routed. Audio tracks can also be routed to a Group channel instead.
Inserts section	Allows you to add insert effects to the track, see page 232 . The Edit button at the top of the section opens the control panels for the added insert effects.
Equalizers section	Lets you adjust the EQs for the track. You can have up to four bands of EQ for each track, see page 211 . The Edit button at the top of the section opens the Channel Settings window for the track.
Equalizer Curve section	Lets you adjust the EQs for the track graphically, by clicking and dragging points in a curve display.
Sends section	Allows you to route an audio track to one or several FX channels (up to eight), see page 242 . For MIDI tracks, this is where you assign MIDI send effects. The Edit button at the top of the section opens the control panel for the first effect in each FX channel.
Channel section	Shows a duplicate of the corresponding mixer channel strip. The channel overview strip to the left lets you activate and deactivate insert effects, EQs and sends.
Notepad section	This is a standard text notepad, allowing you to jot down notes about the track.
Network section	This contains controls related to Nuendo's Network functions. See the Networking pdf document for information.

Audio tracks

For audio tracks, all settings and sections listed above are available.

MIDI tracks

When a MIDI track is selected, the Inspector contains a number of additional sections and parameters, affecting the MIDI events in real time (e.g. on playback). Which sections are available for MIDI tracks is described in a separate chapter, see [page 451](#).

Marker tracks

When a marker track is selected, the Inspector shows the marker list. See [page 150](#).

Folder tracks

When a folder track is selected, the Inspector shows the folder and its underlying tracks, much like a folder structure in the Windows Explorer or Mac OS X Finder.

- You can click one of the tracks shown under the folder in the Inspector to have the Inspector show the settings for that track.

This way, you don't have to "open" a folder track to make settings for tracks within it.



Here, an audio track within the folder is selected.

FX channel tracks

When an FX channel track is selected, the following controls and sections are available:

- Edit button.
- Volume control.
- Pan control.
- Output routing pop-up menu.
- Inserts section.
- Equalizers section.
- Channel section.
- Notepad section.

FX channel folder tracks

FX channel tracks are automatically placed in a special folder, for easier management. When this folder track is selected, the Inspector shows the folder and the FX channels it contains. You can click one of the FX channels shown in the folder to have the Inspector show the settings for that FX channel – this way you don't have to “open” a folder track to access the settings for the FX channels in it.

Group channel tracks

When a Group channel track is selected, the following controls and sections are available:

- Edit button.
- Volume control.
- Pan control.
- Output routing pop-up menu.
- Inserts section.
- Equalizers section.
- Sends section.
- Channel section.
- Notepad section.

Group channel folder tracks

Just like FX channel tracks, all Group channel tracks are placed in a separate folder – when this is selected, the Inspector shows the folder and the Group channels it contains. You can click one of the Group channels shown in the folder to have the Inspector show the settings for that Group channel – this way, you don't have to “open” a folder track to access the settings for the Group channels in it.

Video tracks

When a Video track is selected, the Inspector shows the following sections:


- Notepad section
- Network section.

Ruler tracks

For ruler tracks, the Inspector isn't used.

The toolbar

The toolbar contains tools and shortcuts for opening other windows and various project settings and functions:

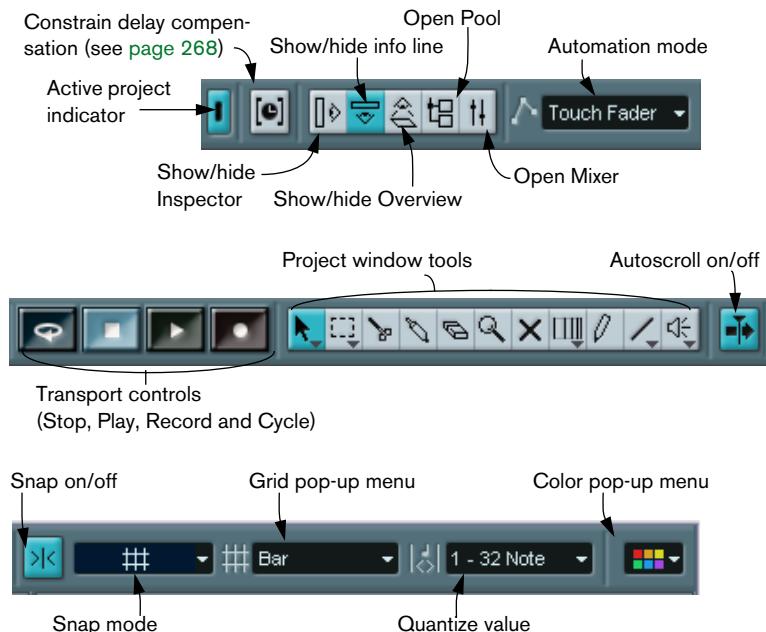

- In addition, the toolbar can contain a number of other tools and shortcuts, not visible by default. How to set up the toolbar and specify which tools should be displayed or hidden is described on [page 712](#).

The info line

File	Description	Start	End	Length	Offset	Snap	Volume	Fade In	...
Scratches	Scratches	2.02.01.000	2.04.01.000	0.2.0.0	0.0.0	2.02.01.000	0.00 dB	0.0.0	F

The info line shows information about the currently selected event or part in the Project window. You can edit almost all values in the info line using regular value editing. Length and position values are displayed in the format currently selected for the ruler (see [page 94](#)).

- To hide or show the info line, click this icon on the toolbar:



The following elements can be selected for display and editing on the info line:

- Audio events.
- Audio parts.
- MIDI parts.
- Video events.
- Markers.
- Automation curve points.

When several elements are selected

- If you have several elements selected, the info line will show information about the first item in the selection. The values will be shown in yellow to indicate that several elements are selected.
- If you edit a value on the info line, the value change is applied to all selected elements, relatively to the current values.

An example: You have two audio events selected. The first is one bar long and the other two bars long. The info line shows the length of the first event (one bar). If you now edit this value to 3 bars in the info line, the other event will be resized by the same amount – and will thus be 4 bars long.

- If you press [Ctrl]/[Command] and edit on the info line, the values will be absolute instead. In our example above, both events would be resized to 3 bars. Note that [Ctrl]/[Command] is the default modifier key for this – you can change this in the Preferences dialog (Editing-Tool Modifiers page, under the Info Line category).

Editing Transpose and Velocity for MIDI parts

When one or several MIDI parts are selected, the info line contains Transpose and Velocity fields.

- Adjusting the Transpose field transposes the selected parts in semi-tone steps.

Note that this transposition doesn't change the actual notes in the part – it's just a "play parameter", affecting the notes on playback. The transposition you specify for a part on the info line is added to the transposition set for the whole track with the Transpose track parameter in the Inspector (see [page 456](#)).

- Adjusting the Velocity field shifts the velocity for the selected parts – the value you specify is added to the velocities of the notes in the parts. Again, this velocity shift only affects the notes on playback, and again, the value you specify is added to the Vel.Shift. value set for the whole MIDI track in the Inspector (see [page 456](#)).

The ruler



The ruler at the top of the event display shows the timeline. Initially, the Project window ruler uses the display format specified in the Project Setup dialog (see [page 97](#)), as do all other rulers and position displays in the project. However, you can select an independent display format for the ruler by clicking the arrow button to the right of it and selecting an option from the pop-up menu that appears (you can also bring up this pop-up menu by right-clicking anywhere in the ruler).

Option	Positions and lengths displayed as
Bars+Beats	Bars, beats, sixteenth notes and ticks. By default there are 120 ticks per sixteenth note but you can adjust this with the "MIDI Display Resolution" setting in the Preferences dialog (MIDI page).
Seconds	Hours, minutes, seconds and milliseconds.
Timecode	This format displays hours, minutes, seconds and frames. The number of frames per second (fps) is set in the Project Setup dialog (see page 97). You can choose from 24, 25, 29.97 and 30 fps or 29.97 and 30 dfps ("drop frame").
Feet+Frames 16mm	Feet and frames, with 40 frames per foot.
Feet+Frames 35mm	Feet, frames and 1/4 frames, with 16 frames per foot.
Samples	Samples.
User	Hours, minutes, seconds and frames, with a user definable number of frames per second. You set the desired number of fps in the Preferences dialog (Transport page). See page 97 .

- The selection you make here affects the ruler, the info line and tool tip position values (appear when you drag an event in the Project window). You can also select independent formats for other rulers and position displays.
- To set the display format globally (for all windows), use the primary display format pop-up on the Transport panel, or hold down [Ctrl]/[Command] and select a display format in any ruler.
- If you use the "Timecode" or "User" options and the option "Show Timecode Subframes" is activated in the Preferences dialog (Transport page), the frames will also display subframes.
There are 80 subframes per frame.

- For the “Feet+Frames” settings, there is an option in the Preferences (Transport page) called “Feet’n’Frames Count from Project Start”. When this is activated, time displays and rulers in Feet+Frames format will always start with 0’00 at the beginning of the project - regardless of any Start offset settings in the Project Setup dialog.

Using multiple rulers – ruler tracks

As described above, the Nuendo Project window contains a main ruler at the top of the event display, displaying the timeline from left to right.

If needed, you can have several rulers in the Project window, by adding ruler tracks to the project. Each ruler track contains an additional ruler.

- To add a ruler track, select “Add Track” from the Project menu and from the submenu that appears, select “Ruler”.
A ruler track showing an additional ruler is added to the Track list.




A ruler track set to the display format “Seconds”.

You can add any number of ruler tracks to a project, and position them as needed by dragging them up or down in the list. Each one can show a separate display format:

- To select a display format for a ruler track, click the leftmost part of it in the track list and select an option from the pop-up menu.

See the section “[The ruler](#)” above for descriptions of the different display formats.

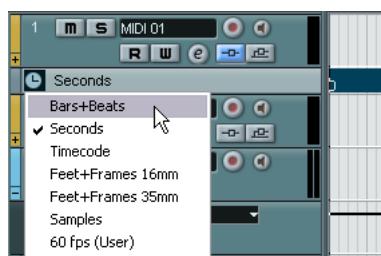

Note that ruler tracks are completely independent from the main event display ruler, as well as rulers and position displays in other windows. This means that:

- Ruler tracks can all have independent display formats.
- Ruler tracks are not affected by the display format setting in the Project Setup dialog (see [page 97](#)).
- Ruler tracks are not affected if you set the display format globally with the primary time display in the Transport panel.
- **Ruler tracks are however affected by the option “Show Timecode Sub-frames” (described above) in the Preferences dialog.**

Operations

Creating a new project

You create a new project in the following way:

1. Select “New Project” from the File menu.

A dialog appears, listing a number of project templates, including any custom templates you may have created (see [page 682](#)).

2. Select a template and click OK.


A file dialog appears, allowing you to specify a location for the project folder. This will contain all files related to the project.

3. Select an existing folder or type the name of a new one. Click OK.

A Project window appears. The new project will be based on the selected template, and include tracks, events and settings from the template.

The Project Setup dialog

General settings for the project are made in the Project Setup dialog. This is opened by selecting “Project Setup...” from the Project menu.

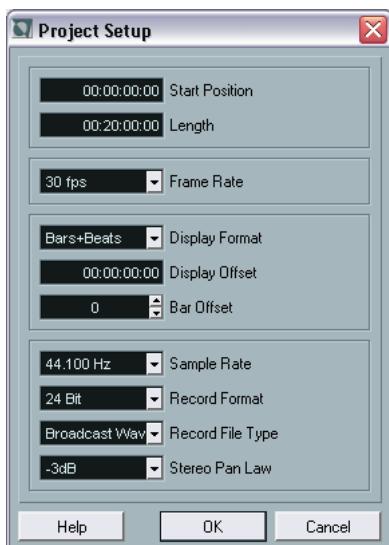

The following settings are available in the Project Setup dialog:

Setting	Description
Start	The start time of the project. Allows you to have the project start at another time than zero. Also used for setting the sync start position when synchronizing Nuendo to external devices (see page 624). See also the note about "Feet'n'Frames Count from Project Start" on page 95 .
Length	The length of the project.
Frame Rate	Used if you are synchronizing Nuendo with external equipment. If Nuendo is the slave, this value is automatically set to the frame rate of the incoming sync signal. If Nuendo is the master, this determines the frame rate of the sent sync signal. See page 637 .
Display Format	This is the global display format used for all rulers and position displays in the program, except ruler tracks (see page 90). However, you can make independent display format selections for the individual rulers and displays if you like. For descriptions of the different display format options, see page 94 .
Display Offset	Offsets the time positions displayed in the ruler etc., allowing you to compensate for the Start position setting. Typically, if you synchronize Nuendo to an external source starting at a frame other than zero, you set the Start position to this value. However, if you still want the display in Nuendo to start at zero, set the Display Offset to the same value too.
Bar Offset	This works just like "Display Offset" described above, in that it offsets the time positions in the ruler by a number of bars, allowing you to compensate for the Start position setting. The difference is that Bar Offset is only used when the "Bars+Beats" display format is selected (see page 94).
Sample Rate	The sample rate at which Nuendo records and plays back audio.
Record Format	When you record audio files in Nuendo, they are recorded with this resolution. See page 43 .
Record File Type	The file type that should be created when you record audio. See page 43 .
Stereo Pan Law	Decides whether panning should use power compensation or not. This is explained on page 206 .

- While most settings in the Project Setup can be changed at any time, you should select a sample rate once and for all when starting with a new project! All audio files must be of this sample rate to play back correctly.

Zoom and view options


Zooming in the Project window is done according to the standard zoom procedures (see the Getting Started book), with the following special notes:

- When you are using the Zoom tool (magnifying glass), the result depends on the option “Zoom Tool Standard Mode: Horizontal Zooming Only” in the Preferences - Editing dialog.
If this is activated and you drag a selection rectangle with the Zoom tool, the window will only be zoomed horizontally (track height will not change). If the option is off, the window will be zoomed both horizontally and vertically.
- When using the vertical zoom sliders, the tracks are scaled relatively. In other words, if you have made any individual track height adjustments (see below), the relative height differences are maintained.

You find the following options are available on the Zoom submenu on the Edit menu:

Option	Description
Zoom In	Zooms in one step, centering on the project cursor.
Zoom Out	Zooms out one step, centering on the project cursor.
Zoom Full	Zooms out so that the whole project is visible. “The whole project” means the timeline from the project start to the length set in the Project Setup dialog (see above).
Zoom to Selection	Zooms in horizontally and vertically so that the current selection fills the screen.
Zoom to Selection (Horiz)	Zooms in horizontally so that the current selection fills the screen.
Zoom to Event	This option is available only in the Sample Editor (see page 374).
Zoom In Vertical	Zooms in one step vertically.
Zoom Out Vertical	Zooms out one step vertically.
Zoom In Tracks	Zooms in selected track(s) one step vertically.
Zoom Out Tracks	Zooms out selected track(s) one step vertically.
Zoom Selected Tracks	This zooms in vertically on the selected track(s) and minimizes the height of all other tracks.

- If the option “Zoom while Locating in Time Scale” is activated in the Preferences (Transport page), you can also zoom by clicking in the main ruler and dragging up or down with the mouse button pressed. Drag up to zoom out; drag down to zoom in.
- You can zoom the contents of parts and events vertically, using the Waveform Zoom slider in the top right corner of the event display. This can be useful to better view quiet audio passages.

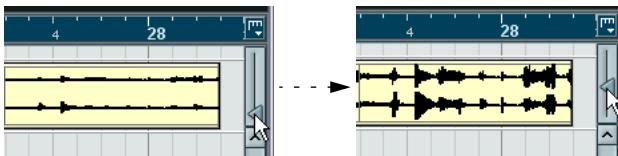


-
- To get an approximate reading on the level of the audio events by viewing the waveforms, make sure the slider is all the way down. Otherwise, zoomed waveforms may be mistaken for clipped audio.
-
- If you activate the option Quick Zoom in the Preferences (Editing page), the contents of parts and events will not be continuously redrawn when you zoom manually.
Instead, the contents are redrawn once you have stopped changing the zoom – activate this if screen redraws are slow on your system.

Resizing tracks in the Track list


- You can change the height of an individual track by clicking on its lower border in the Track list and dragging up or down.
To change the height of all tracks simultaneously, hold down [Ctrl]/[Command] and resize one of the tracks in this way. If “Snap Track Heights” is activated on the Track scale pop-up (see below), the track height will change in fixed increments when you resize it.
- You can also change the width of the Track list area, by dragging the border between the Track list and the event display.
- The controls shown for tracks in the Track list will by default adapt to the track size. This means that when resizing a track’s height or width some of the controls will be dynamically placed where they best “fit in”. If you instead always want to have the controls in fixed positions, you can deactivate the option “Wrap Controls” in the Track Controls settings dialog (see [page 714](#)).

- You can decide for each track type what controls should be shown in the Track list – see [page 714](#).
- You can use the Track scale pop-up (opened by clicking the arrow button above the vertical zoom control) to set the number of tracks to view in the current Project window.
The track height will be adjusted to show only the number of tracks specified on the pop-up menu. By selecting “Zoom N Tracks” from the pop-up you can manually set the number of tracks to fit in the current Project window.

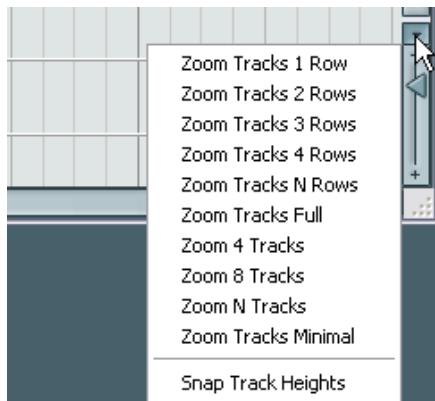

Zoom presets and Cycle markers

The pop-up menu to the left of the horizontal zoom control allows you to select, create and organize zoom presets. These are useful if you want to toggle between different zoom settings (e.g. one where the whole project is displayed in the project window and another with a high zoom factor for detailed editing). With this pop-up menu, you can also zoom in on the area between cycle markers in the project.

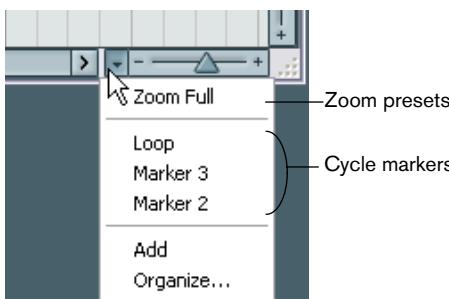

The upper part of the menu lists the zoom presets:

- To store the current zoom setting as a preset, select Add from the pop-up menu.
A dialog appears, allowing you to type in a name for the preset.
- To select and apply a preset, select it from the pop-up menu.
- The “Zoom Full” preset is always available. Selecting this option Zooms out so that the whole project is visible. “The whole project” means the timeline from the project start to the length set in the Project Setup dialog (see [page 97](#)).
If you want to delete a preset, select “Organize...” from the pop-up menu.
In the dialog that appears, select the preset in the list and click the Delete button. The preset is removed from the list.
- If you want to rename a preset, select “Organize...” from the pop-up menu.
In the dialog that appears, select the desired preset in the list and click the Rename button. A second dialog opens, allowing you to type in a new name for the preset. Click OK to close the dialogs.

Zoom presets are global for all projects, i.e. they are available in all projects you open or create.

The middle part of the pop-up lists any cycle markers you have added in the project:

- If you select a cycle marker form this menu, the event display is zoomed in to encompass the marker area (see [page 157](#)).
- You cannot edit the cycle markers in this pop-up menu. For information on editing markers, see [page 150](#).

Only the cycle markers you create in the current project are available on the menu.

The Zoom history

Nuendo maintains a history of recent zoom stages, allowing you to undo and redo zoom operations. This way you can zoom in several steps and then easily go back to the zoom stage at which you started.

There are two ways to invoke Undo Zoom and Redo Zoom:

- Use the items on the Zoom submenu on the Edit menu.
You can also assign key commands for these.
- Double click with the Zoom tool (magnifying glass) to Undo Zoom.
Press [Alt]/[Option] and double click to Redo Zoom.

Adjusting how parts and events are shown

The Preferences dialog on the File menu (the Nuendo menu, under Mac OS X) contains several settings for customizing the display in the Project window.

The Event Display page contains common settings for all track types:

Option	Description
Colorize Event Background	Determines whether the backgrounds or "contents" (waveforms, etc.) of parts and events will be colorized. See page 106 .
Transparent Events	When this is activated, events and parts will be transparent, showing the waveforms and MIDI events only.
Show Data on Small Track Heights	If this is activated, the contents of events and parts will be shown, even if the height of a track is very small.
Show Event Names	Determines whether the names of parts and events should be shown in the Project window.

The Event Display–Video page contains settings for video events:

Option	Description
Show Video Thumbnails	When this is activated, thumbnail frames of the video contents are shown on the Video track.
Video Cache Size	This determines how much memory is available for video thumbnails. If you have long video clips and/or work with a large zoom factor (so that a lot of frames are shown in the thumbnails), you may have to raise this value.

The Event Display–Audio page contains settings for audio events:

Option	Description
Interpolate Audio Images	If the option is deactivated, single sample values are drawn as "steps". If the option is activated they are interpolated to form "curves".
Wave Image Style	Determines whether audio waveforms should be displayed as solid images, frames or "inverted" images (solid+frame). This selection affects all waveform images in the Project window, Sample Editor and Audio Part Editor. Note that the "Framed" and "Solid and Framed" styles are more demanding for the computer. If the system feels slower in these modes, please switch back to "Solid" wave image style.
Show Event Volume Curves Always	If this is activated the "volume curves" created with the volume and fade handles are always shown – if not, the curves are only shown for selected events.

The Event Display–MIDI page contains settings for MIDI parts:

Option	Description
Default Edit Action	Determines which editor should be opened when you double click a MIDI part or select it and press [Ctrl]/[Command]-[E]: the Key, Drum, List or Score editor. Note that this setting is overridden for tracks with drum maps if the option "Edit as Drums when Drummap is assigned" (see below) is activated.
Part Data Mode	Determines if and how events in MIDI parts should be shown in the Project window: as lines, as score notes or as drum notes. If "No Data" is selected, events will not be shown at all. Note that this setting is overridden for tracks with drum maps if the option "Edit as Drums when Drum Map is assigned" (see below) is activated.
Show Controllers	Governs whether non-note events (controllers, etc.) should be shown in MIDI parts in the Project window.
Edit as Drums when Drum Map is assigned	If this is activated, parts on MIDI tracks with drum maps assigned will be shown with drum note symbols in the Project window. Also, the parts will automatically open in the Drum editor when double clicked (overriding the Default Edit Action setting above).
Note Name Style	Determines how MIDI note names (pitches) should be displayed in editors, etc.


Zooming and navigating in the overview line

By clicking the Show Overview button on the toolbar, an extra pane appears under the toolbar; the project overview line.



Show Overview button

In the overview line, events and parts on all tracks are displayed as boxes. You can use the overview line to zoom in or out, and for navigating to other sections of the project. This is done by moving and resizing the track view rectangle in the overview line:

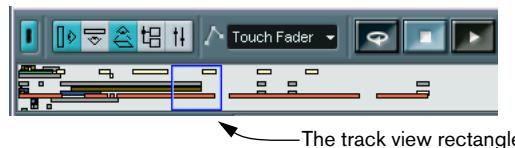

- The track view rectangle indicates the section of the project currently displayed in the event display.
- You can zoom in or out horizontally by resizing the rectangle. Resizing is done by dragging the edges of the rectangle.



- You can drag the track view rectangle to view other sections of the project.


This can also be done by clicking anywhere in the upper part of the overview - the track view rectangle will be moved to where you clicked. The number of tracks shown will not change.

Handling tracks

To add a track to the project, select “Add Track” from the Project menu and select a track type from the submenu that appears. The new track is added below the currently selected track in the Track list.

- The items on the “Add Track” submenu are also available on the Quick menu.

This is accessed by right-clicking (Win)/[Ctrl]-clicking (Mac) in the Track list.

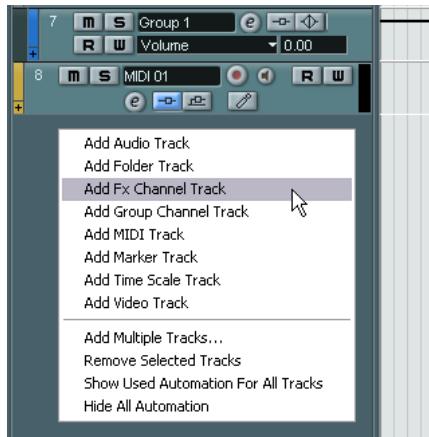

- There is an additional option at the bottom of the Add Track submenu, called “Multiple...”. Selecting this brings up a dialog allowing you to add more than one track in one operation.


The number of tracks to add is entered in the “Count” value field. You can set whether audio, MIDI or group tracks should be created by selecting from the Track pop-up in the dialog. For audio and group tracks, the channel configuration (mono, stereo or a surround configuration) can be set in the Configuration pop-up.

Once you have created tracks, you can manipulate and rearrange them in various ways:

- To rename a track, double click in the name field and type in a new name.

If you hold down any modifier key when pressing [Return] to close the name field, all events on the track will get the name you entered.

- To select a track, click on it in the Track list.
A selected track is indicated by a light grey color in the Track list.

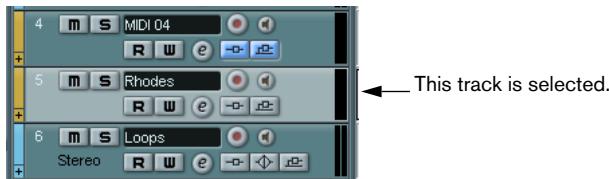

It is possible to select several tracks, by pressing [Ctrl]/[Command] and clicking them. To select a continuous range of tracks, use [Shift]-clicking.

- To move a track, click and drag it up or down in the list.
- To duplicate a track, complete with all contents and channel settings, right-click in the Track list and select “Duplicate track” from the context menu.
The duplicated track will appear above the original track.
- You can colorize the contents of selected track(s), or selected parts and events by clicking the Color button on the toolbar and selecting a color from the pop-up menu that appears.

If one or several tracks are selected, all events and parts on the track(s) will get the selected color, as will any events and parts you add to the track later. If individual events or parts are selected, only these will be affected. Individually colorized events and/or parts will keep the applied color even if the track they belong to is later set to another color. The option “Colorize Event Background” in the Preferences dialog (Event Display page) determines whether the backgrounds or waveforms of events will be colorized.

- To remove a track, right-click on it in the Track list and select “Remove Track” from the context menu that appears.
You can also remove multiple selected tracks, by selecting “Remove Selected Tracks” either from the Project menu or from the context menu. Furthermore, you can remove all tracks not containing any events by selecting “Remove Empty Tracks” from the Project menu.

Disabling tracks

Tracks can be disabled by selecting “Disable Track” from the Track list context menu. Disabling a track in a way is the same as Muting it (see [page 127](#)), since a disabled track will not be played back. However, disabling a track not only “zeroes” the output volume from the track, but actually shuts down all disk activity for it. See [page 34](#) for more information.

Dividing the Track list

It is possible to divide the Track list into two parts. Both sections will have independent zoom and scroll controls (if needed), but resizing the window vertically will affect the lower section only (if possible). This could be convenient for example if you’re working with a video track along with multi-track audio. This way, you can place the video track in the upper Track list, letting you scroll the audio tracks separately in the lower Track list, referencing them against the video track.

- To divide the Track list, click the “Divide Track List” button in the top right corner of the Track list.



The “Divide Track List” button.

- To revert to a single Track list, click the button again.

When the Track list is divided into two parts, the following applies:

- If you add tracks from the Project–Add Track submenu, Video tracks, Marker tracks and ruler tracks will automatically be placed in the upper part of the Track list.

All other types of tracks will be placed in the lower part.

- If you add tracks from the context menu invoked by right-clicking (Windows) or [Ctrl]-clicking (Mac OS X) in the Track list, tracks will be added to the part of the Track list in which you click.
- You can move any type of track from the lower Track list to the upper and vice versa by right-clicking or [Ctrl]-clicking it in the Track list and selecting “Toggle Track List” from the context menu.
- If the Track list already contains tracks of the type Video, Marker or Ruler, these will automatically be moved to the upper part when you divide the Track list.
- You can resize the upper part by clicking and dragging the divider between the Track lists.



Switching between musical or linear time base

Tracks can be either “musical” (tempo) or “linear” (time) based.

- On a track using linear time base, the events will be positioned on specific time positions – changing the playback tempo will not affect the time position of events.
- On a track using musical time base, the positions of events are represented as meter values (bars, beats, 1/16th notes and ticks, with 120 ticks per 1/16th note). If you change the playback tempo, the events will play back at an earlier or later time.

Whether to use musical or linear time base depends on the type of project and recording situation. By default, all track types featuring a time base setting use linear time base. However, you can change this setting individually for each track. This is done by clicking the musical/linear time base button in the Inspector or Track list. Musical time base is indicated by a note symbol, while linear time base is indicated by a clock symbol.



- Note that internally, events on musical time based tracks use the same high precision for positioning (64 bit floating point values) as linear time based events. However, switching between linear and musical time base results in a very small loss of precision (introduced by the mathematical operations used for scaling values in the two different formats). Therefore you should avoid switching repeatedly between the two modes.

For more information about tempo changes, see [page 550](#).

Adding events to a track

There are a number of ways to add events to a track:

- By recording (see [page 39](#)).
This is possible for audio and MIDI tracks.
- By selecting “Audio File...” or “Video File...” from the Import submenu on the File menu.
This opens a file dialog, allowing you to locate the file you wish to import. When you import a file this way, a clip is created for the file and an event that plays the whole clip is added to the selected track, at the position of the project cursor.
You can also import MIDI files by using the Import submenu, but this works in a slightly different way (see [page 689](#)).
- By grabbing audio CD tracks and converting them to audio files (see [page 697](#)).
- By importing only the audio portion of a video file and converting it to an audio file (see [page 662](#)).
- By using Copy and Paste on the Edit menu.
This allows you to copy all kinds of events between projects. You can also copy events within the project, from the Audio Part Editor or Sample Editor.
- By drawing.
Some types of events (markers and automation events) can be drawn directly into the Project window. For audio and MIDI tracks, you can draw parts (see [page 113](#)).
- By dragging files and dropping them on the track at the desired position.
You can create events by dragging and dropping from the following locations:
 - The Desktop.
 - The Pool.
 - A Library (A Pool file that is not attached to a project).
 - The Project window of another open project.
 - The Audio Part Editor of any open project.
 - The Sample Editor of any open project – press [Ctrl]/[Command] and drag to create an event of the current selection, or click in the left column of the region list and drag to create an event from a region.
 - The “Find media” dialog.




While you drag the clip in the Project window, its position will be indicated by a marker line and a numerical position box. See also [page 429](#).

Audio file import options

When you are importing audio files there are a number of options concerning how the files should be treated by Nuendo:

- You can choose to copy the file into the project's audio folder and have the project make reference to the copied file rather than the original file. This helps you keep your project "self-contained".
- You can choose to split stereo- and multi-channel files into a number of mono files.
- Furthermore, you may want all files in the project to have the same sample rate and sample size (resolution).

The Preferences dialog (Editing – Audio page) contains a setting that lets you decide which options, if any, to use. Select the desired option on the "On Import Audio Files" pop-up:

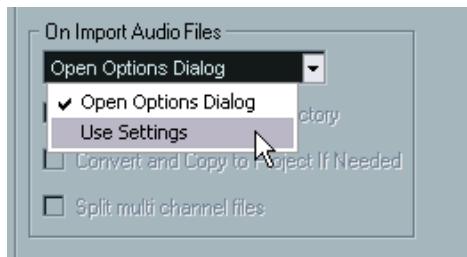

- Open Options Dialog.

An Options dialog appears when you import, allowing you to select whether you want to copy the files to the Audio folder and/or convert them to the project settings. Note:

- When importing a single file of a format other than the project settings, you can specify which properties (sample rate and/or resolution) should be changed.
- When importing multiple files at the same time, you can select to have the imported files automatically converted *if necessary*, i.e. if the sample rate is different than the project's or the resolution is lower than the project setting.

- **Use Settings.**

No Options dialog will appear when you import. Instead, you can choose to make any of the options below the pop-up the standard action(s). Activate any number of the following options to have them performed automatically each time you import audio files:

Option	Description
Copy Files to Working Directory	If files are not already in the project's audio folder they are copied there before being imported.
Convert and Copy to Project If Needed	If files are not already in the project's audio folder they are copied there before being imported. Furthermore, if the files have a different sample rate or a lower resolution than the project settings, they are automatically converted.
Split multi channel files	If you import a multi-channel audio file (including two-channel stereo files), it will be split into a number of mono files – one for each channel – which are placed on separate, automatically created mono tracks.

Creating parts

Parts are containers for MIDI or audio events. If you record MIDI, a MIDI part is automatically created, containing the recorded events. You can also create empty audio or MIDI parts and later add events to them. There are two ways to do this:

- Draw a part on a MIDI or audio track with the Pencil tool.
You can also draw parts by pressing [Alt]/[Option] and using the Arrow tool.
- Double click with the Arrow tool on a MIDI or audio track, between the left and right locator.



To add events to a MIDI part, you use the tools and functions in a MIDI editor (see [page 492](#)). Adding events to audio parts is done in the Audio Part Editor (see [page 391](#)) by pasting or by using drag and drop.

- You can also gather existing audio events into a part, by using the "Events to Part" function on the Audio menu.
This creates an audio part containing all selected audio events on the same track. To remove the part and make the events appear as independent objects on the track again, select the part and use the "Dissolve Part" function on the Audio menu.

Auditioning audio parts and events

Audio parts and events can be auditioned in the Project window with the Speaker tool:

-
- When auditioning, audio will be routed directly to the assigned Output bus, bypassing the audio channel's settings, effects and EQs.
-

1. Select the Play tool.

Note that the Play tool and the Scrub tool share the same icon. If the rightmost tool icon on the toolbar isn't a Speaker symbol, first click on the icon to select it, then click again and select "Play" from the pop-up menu that appears.



2. Click where you want playback to start, and keep the mouse button pressed.

Only the track on which you click is played back, starting at the click position.

3. Release the mouse button to stop playback.

Scrubbing

The Scrub tool allows you to locate positions in the audio by playing back, forwards or backwards, at any speed:

1. Select the Scrub tool.

Note that the Play tool and the Scrub tool share the same icon. If the rightmost tool icon on the toolbar isn't a "Scrub symbol", first click on the icon to select it, then click again and select "Scrub" from the pop-up menu that appears.



2. Click at the desired position and keep the mouse button pressed.

The project cursor is moved to the position at which you click.

3. Drag to the left or right.

The project cursor follows the mouse pointer and the audio is played back. The speed and pitch of the playback depends on how fast you move the pointer.

You can adjust the responsiveness of the Scrub function in the Preferences dialog (VST page).

- It is also possible to "scrub" the whole project with the **Jog wheel** on the **Transport panel**.

See [page 33](#).

Editing parts and events

This section describes techniques for editing in the Project window. If not explicitly stated, all descriptions apply to both events and parts, even though we use the term “event” for convenience.

- When you are using the tools for editing, you can in many cases get additional functions by pressing modifier keys (e.g. pressing [Alt]/[Option] and dragging with the Arrow tool creates a copy of the dragged event).

On the following pages, the default modifier keys are described – you can customize these in the Preferences dialog on the Editing –Tool Modifiers page (see [page 742](#)).

Selecting events

Selecting events is done using any of the following methods:

- Use the Arrow tool.
The standard selection techniques apply.
- Use the Select submenu on the Edit menu.
The options are:

Option	Description
All	Selects all events in the Project window.
None	Deselects all events.
Invert	Inverts the selection status, so that all selected events are deselected and all events that were not selected are selected instead.
In Loop	Selects all events that are partly or wholly between the left and right locator.
From Start to Cursor	Selects all events that begin to the left of the project cursor.
From Cursor to End	Selects all events that end to the right of the project cursor.
All on Selected Tracks	Selects all events on the selected track.
Select Event	This is available in the Sample Editor (see page 369).
Left/Right Selection Side to Cursor	These two functions are only used for range selection editing (see page 132).

- Note that these functions work differently when the Range Selection tool is selected (see [page 132](#)).

- Select all events on a track by right-clicking in its Track list and selecting “Select All Events” from the pop-up menu that appears.
- You can also use the arrow keys on the computer keyboard, to select the closest event to the left, right, above or below.
If you press [Shift] and use the arrow keys, the current selection will be kept, allowing you to select several events.
- If the option “Auto Select Events under Cursor” is activated in the Preferences dialog (Editing page), all events on the selected track(s) that are “touched” by the project cursor are automatically selected. This can be helpful when rearranging your project, since it allows you to select whole sections (on all tracks) by selecting all tracks and moving the project cursor.
- It is also possible to select ranges, regardless of the event and track boundaries.
This is done using the Range Selection tool (see [page 132](#)).

Moving events

To move events in the Project window, use the following methods:

- Click and drag to a new position.
All selected events will be moved, maintaining their relative positions. You can only drag events to tracks of the same type. If Snap is activated, this determines to which positions you can move the events (see [page 137](#)).
Note also, that you can restrict movement to be either horizontal or vertical only, by holding down [Ctrl]/[Command] while dragging.
- You will note that there is a slightly delayed response when you move an event by dragging. This helps you avoid accidentally moving events when you click on them in the Project window. You can adjust this delay with the Drag Delay setting in the Preferences dialog (Editing page).**
- Select the event and edit the Start position in the info line.

- Use the “Move to” functions on the Edit menu.

The following functions are available:

Function	Description
Move to Cursor	Moves the selected event to the project cursor position. If there are several selected events on the same track, the first event will start at the cursor, and the following will be lined up end-to-start after the first one.
Move to Origin	Moves the selected events to their original positions, i.e. the positions at which they were originally recorded.
Move to Front, Move to Back	<p>This function doesn't actually change the position of the events, but moves the selected events to the front or back, respectively. This is useful if you have overlapping events, and want to see one that is partially obscured.</p> <p>For audio events, this is an extra important feature, since only the visible sections of events will be played back. Moving an obscured audio event to front (or moving the obscuring event to back) will allow you to hear the whole event on playback.</p> <p>Note that it is also possible to use the “To Front” function on the event context menu for this (although this works in a different way, see page 55).</p>

- Use the Nudge buttons in the toolbar.

These move the selected events to the left or right. The amount of movement depends on the selected display format (see [page 97](#)) and the value set on the Grid pop-up menu.



Here, clicking this button will move the Event 2 frames to the right.

- When the Range Selection tool is used, the Nudge buttons move the selection range (see [page 134](#)).

- The Nudge buttons are not visible in the toolbar by default.

You can decide which items should be visible by right-clicking (Windows) or [Ctrl]-clicking (Mac OS X) in the toolbar and checking them in the pop-up menu that appears. See [page 712](#) for more information.

Duplicating events

Events can be duplicated in the following ways:

- Hold down [Alt]/[Option] and drag the event to a new position.
If Snap is activated, this determines to which positions you can copy the events (see [page 137](#)).
- If you hold down [Ctrl]/[Command] as well, movement direction is restricted to either horizontal or vertical. That means if you drag an event vertically it can not be moved horizontally at the same time.
- Audio and MIDI parts can also be duplicated by pressing [Alt]/[Option] + [Shift] and dragging.

This creates a *shared copy* of the part. If you edit the contents of a shared copy, all other shared copies of the same part are automatically edited in the same way.




Shared copies are indicated by a small “s” in the upper right corner of the part.

Note:

- When you duplicate audio events, the copies are always shared. This means that shared copies of audio events always refer to the same audio clip (see [page 329](#)).
- You can convert a shared copy to a real copy by selecting “Convert to Real Copy” from the Edit menu. This creates a new version of the clip (that can be edited independently) and adds this to the Pool. Note that no new files are created by this operation – for that you need to use the “Bounce Selection” function from the Audio menu (see [page 440](#)).
- Selecting “Duplicate” from the Edit menu creates a copy of the selected event and places it directly after the original.
If several events are selected, all of these are copied “as one unit”, maintaining the relative distance between the events.
- Selecting “Repeat...” from the Edit menu opens a dialog, allowing you to create a number of copies (regular or shared) of the selected event(s). This works just like the Duplicate function, except that you can specify the number of copies.

- You can also perform the Repeat function by dragging: Select the event(s) to repeat, press [Alt]/[Option], click the handle in the lower right corner of the last selected event and drag to the right. The longer to the right you drag, the more copies are created (as indicated by the tooltip).

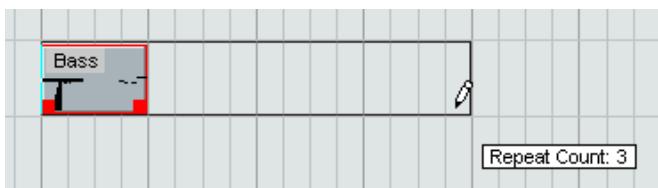

- Selecting “Fill Loop” from the Edit menu creates a number of copies starting at the left locator and ending at the right locator. The last copy is automatically shortened to end at the right locator position.



Using Cut, Copy and Paste

You can cut or copy selected events, and paste them in again, using the functions on the Edit menu.

- When you paste an event it is inserted on the selected track, positioned so that its snap point is aligned with the cursor position. If the selected track is of the wrong type, the event will be inserted on its original track. See [page 137](#) for information about the snap point.
- If you use the “Paste at Origin” function, the event is pasted at its original position (the position from which you cut or copied it).

Renaming events

By default, audio events show the name of their clip, but you can enter a separate descriptive name for separate events if you like. This is done by selecting the event and typing in a new name in the “Description” field in the info line.

- You can also give all events on a track the same name as the track by changing the track name, holding down a modifier key and pressing [Return].

See [page 106](#).

Splitting events

You can split events in the Project window in the following ways:

- Click with the Scissors tool on the event you want to split.
If Snap is activated, this determines the exact split position (see [page 137](#)). You can also split events by pressing [Alt]/[Option] and clicking with the Arrow tool.
- Select “Split at Cursor” from the Edit menu.
This splits the selected events at the position of the project cursor. If no events are selected, all events (on all tracks) that are intersected by the project cursor will be split.
- Select “Split Loop” from the Edit menu.
This splits events on all tracks at the left and right locator positions.
- If you split a MIDI part so that the split position intersects one or several MIDI notes, the result depends on the option “Split MIDI Events” in the Preferences dialog ([Editing page](#)).
If the option is activated, the intersected notes will be split (creating new notes at the beginning of the second part). If it is deactivated, the notes will remain in the first part, but “stick out” after the end of the part.

Gluing events together

Clicking on an event with the Glue Tube tool glues it together with the next event on the track. The result is a part containing the two events, with one exception:

- If you first split an event and then glue the two sections together again (without moving or editing them first), they become a single event again. In other words, gluing can create a single event if the two events are lined up end to start and play a continuous section of the same clip.

Resizing events

Resizing events means to move their start or end positions individually. In Nuendo, there are three types of resizing:


Resizing type	Description
Normal Sizing	The contents of the event stay fixed, and the start or end point of the event is moved to "reveal" more or less of the contents.
Sizing Moves Contents	The contents follow the moved start or end of the event (see the figure below).
Sizing Applies Time Stretch	The contents will be time stretched to fit the new event length (see separate description on page 124).

To select one of the resizing modes, select the Arrow tool and then click again on the Arrow tool icon on the toolbar. This opens a pop-up menu from which you can select one of the resizing mode options.




The icon on the toolbar will change, indicating the selected resizing mode.

The actual resizing is done by clicking and dragging the lower left or right corner of the event. If Snap is activated, the Snap value determines the resulting length (see [page 137](#)).

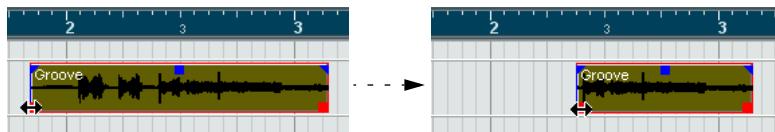


Normal sizing.

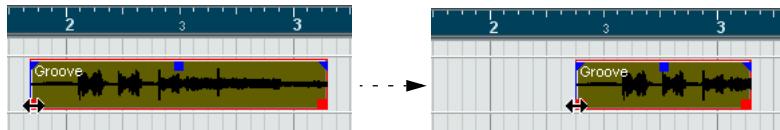

Sizing moves contents.

- If several events are selected, all will be resized in the same way.
- You can also resize events with the Scrub tool.
This works just the same as when resizing with the Arrow tool, but the audio under the pointer is played back (scrubbed) while you drag.
- It is also possible to resize events by using the Trim buttons (located in the Nudge palette) on the toolbar.
This will move the start or end position of the selected Event(s) by the amount set on the Grid pop-up menu. The sizing type currently selected applies to this method too, with the exception of “Sizing Applies Time Stretch” which is not possible with this method. You can also use key commands for this (by default, press [Ctrl] (Windows) or [Command] (Mac) and use the left and right arrow key).

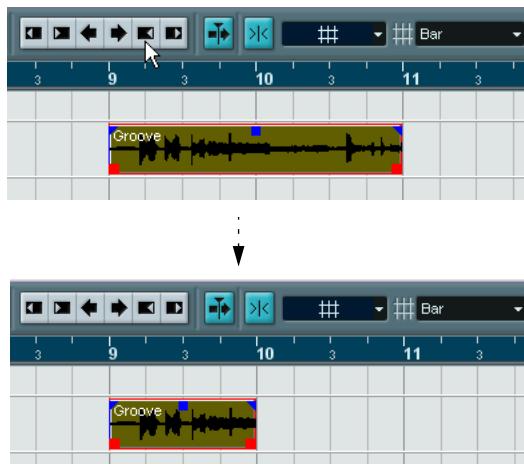


- Note that the Nudge palette is not visible in the toolbar by default. See [page 712](#) for instructions on how to show and hide items in the toolbar.

Resizing events using time stretch

If you want to resize a part and make its contents “fit” the new size, you should use this option. Proceed as follows:

1. Click the Arrow icon on the toolbar and select the “Sizing Applies Time Stretch” option from the pop-up menu.
2. Point close to the end point of the part you want to stretch.
3. Click and drag left or right.

When you move the mouse, a tooltip information shows the current mouse position and length of the part. Note that the snap value applies, as with any part operation.

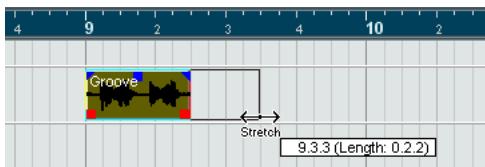

4. Release the mouse button.

The part is “stretched” or “compressed” to fit the new length.



- For MIDI parts, this means that the note events are stretched (moved and resized). Controller data will be moved.
- For audio parts, this means that the events are moved, and that the referenced audio files are time stretched to fit the new length. A dialog box shows the progress of the time stretch operation.
- You can adjust which algorithm should be used for the time stretch algorithm on the Preferences page (Editing-Audio-Time Stretch Tool page). For more information about time stretch, see [page 348](#).

Sliding the contents of an event or part

You can move the contents of an event or part without changing its position in the Project window. By default, this is done by pressing [Ctrl]/[Command]+[Alt]/[Option], clicking in the event or part and dragging to the left or right.


- When sliding the contents of an audio event, you cannot slide past the start or end of the actual audio clip. If the event plays the whole clip, you cannot slide the audio at all.

Locking events

If you want to make sure you don't edit or move an event by accident, you can lock it. Locking can affect one (or any combination) of the following properties:

Lock Options	Description
Position	If this is locked, the event cannot be moved.
Size	If this is locked, the event cannot be resized.
Other	If this is locked, all other editing of the event is disabled. This includes adjusting the fades and event volume, processing, etc.

- To specify which of these properties should be affected by the Lock function, use the “Lock Event Attributes” pop-up menu in the Preferences dialog (Editing page).

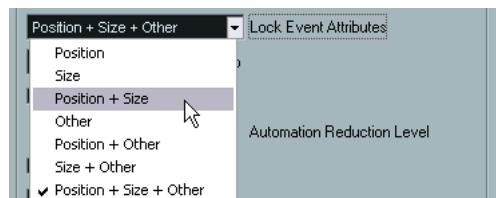

- To lock events, select them and select “Lock...” from the Edit menu. The events will be locked according to the options specified in the Preferences dialog.




The padlock symbol indicates that one or more of the lock options are activated for the event.

- You can adjust the lock options for a locked event by selecting it and selecting “Lock...” from the Edit menu again.
This opens a dialog in which you can activate or deactivate the desired lock options.
- To unlock an event (turn off all lock options), select it and select “Unlock” from the Edit menu.
- It is also possible to lock a whole track, by clicking the padlock symbol in the Track list or in the Inspector.
This disables all editing of all events on the track.

Grouping Events

Sometimes it is useful to treat several events as one unit. This can be done by grouping them: Select the events (on the same or different Tracks) and select “Group” from the Edit menu.

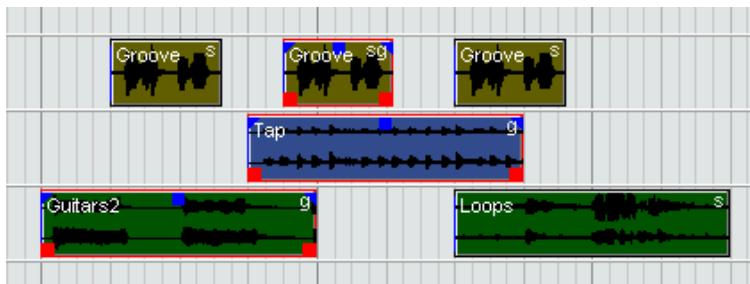

Grouped events are indicated by a “g” in the upper right corner.

If you edit one of the grouped events in the Project window, all other events in the same group are affected too (if applicable). Group editing operations include:

- Selecting events.
- Moving and duplicating events.
- Resizing events.
- Adjusting fade-in and fade-out (audio events only, see [page 162](#)).
- Splitting events (splitting one event will automatically split any other grouped events that are intersected by the split position).
- Locking events.
- Muting events (see below).
- Deleting events.

Muting events

You can Mute individual events in the Project window in the following ways:

- To mute or unmute a single event, click on it with the Mute tool.



The Mute tool.

- To mute or unmute several events, select them – either by using the standard selection techniques, or by using one of the options on the Edit–Select submenu – and click on one of the selected events with the Mute tool.

All selected events will be muted.

- You can also click in an empty area with the Mute tool and drag a selection rectangle around several events you want to mute or unmute, and then click on one of them with the Mute tool.

- You can mute events by selecting them and selecting “Mute” from the Edit menu.

Similarly, you can unmute the selected events by selecting “Unmute” from the Edit menu.

- You can also change the mute status of selected events on the info line.

Muted events can be edited as usual (with the exception of adjusting fades), but are not played back.



Muted events are “greyed out”.

- You can also mute whole tracks by clicking the Mute (“M”) button in the Track list, the Inspector or the mixer.

Clicking the Solo (“S”) button for a track mutes all other tracks.

Removing events

To remove an event from the Project window, use any of the following methods:

- Click on the event with the Eraser tool.
Note that if you press [Alt]/[Option] while you click, all *following* events on the same track will be deleted, but not the event you clicked and all events before it.
- Select the event(s) and press [Backspace], or select “Delete” from the Edit menu.

Creating new files from events

As described in the Getting Started book, an audio event plays a section of an audio clip, which in turn refers to one or more audio files on the hard disk. However, in some situations you may want to create a new file that consists only of the section played by the event. This is done with the function “Bounce Selection” on the Audio menu:

1. Select one or several audio events.
2. Set up fade in, fade out and event volume (on the info line or using the volume handle) as desired.
These settings will be applied to the new file. For details on fades and event volume, see [page 162](#).
3. Select “Bounce Selection” from the Audio menu.

You are asked whether you want to replace the selected event or not.

- If you click “Replace”, a new file is created, containing only the audio in the original event. A clip for the new file is added to the Pool, and the original event is replaced by a new event playing the new clip.
- If you click “No” a new file is created and a clip for the new file is added to the Pool.
The original event is not replaced.

You can also apply the Bounce Selection function to an audio part. In that case, the audio from all events in the part will be combined into a single audio file. If you choose “Replace” when asked, the part will be replaced with a single audio event playing a clip of the new file.

Editing in Lane Display mode

When you are recording in Stacked cycle recording mode, each take ends up on a separate lane on the track as described on [page 58](#) and [page 70](#). However, you can also select this lane mode manually for individual tracks, and use it when editing in the Project window. This makes it easier to view and handle overlapping events and parts.

Audio tracks

1. Make sure the Lane Display Type button is visible in the track list. If it is hidden, you need to select Track Controls Settings from the context menu for the track and add the Lane Display Type item in the dialog that appears.




2. Click the Lane Display Type button and select "Lanes Fixed" from the pop-up menu that appears.

The audio track is divided vertically into two lanes. By default, all audio events end up in the first (top) lane.

3. Now you can move events or parts between lanes, either by dragging or by using the "Move to Next Lane/Previous Lane" commands on the Edit menu or Quick menu.

Note that if there are overlapping audio events, the audio on the lowest lane has playback priority – moving events between lanes affects what will be heard!

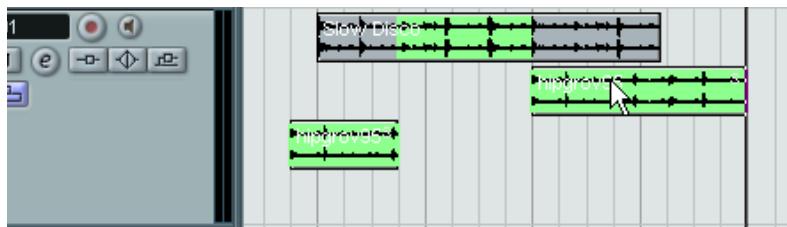

If the vertical zoom factor is sufficiently high, the sections that will be heard on playback are indicated in green.

- Note that there will always be an extra, empty lane at the bottom of the track – if you move an event there, another lane will be added and so on.

Depending on the number of lanes used, you may want to adjust the vertical zoom for the track – simply drag the track edges in the track list.

4. After rearranging the overlapping events so that you hear what you want, you can select all events and select “Delete Overlaps” from the Advanced submenu on the Audio menu.

This puts all events in the top lane and resizes events so that overlapping sections are removed.

5. To turn off Lanes mode, select “Lanes Off” from the Lane Display Type pop-up menu.

If you do this without using the “Delete Overlaps” function, all overlapping sections will be kept. However, the sections that were green will now be the sections visible (“on top”) and thus the sections that will be heard.

MIDI tracks

1. Make sure the Lane Display Type button is visible in the track list. If it is hidden, you need to select Track Controls Settings from the context menu for the track and add the Lane Display Type item in the dialog that appears.



2. Click the Lane Display Type button and select "Lanes Auto" or "Lanes Fixed".
 - In Lanes Auto mode, extra lanes will automatically be added where necessary – if two MIDI parts overlap, they will automatically be put on separate lanes.
 - In Lanes Fixed mode, you have to move MIDI parts between lanes manually (by dragging them or by using the "Move to Next Lane/Previous Lane" commands on the Edit menu or Quick menu).
In this mode, there will always be an extra, empty lane at the bottom of the track – if you move a part there, another lane will be added and so on.
3. You can edit the overlapping parts as usual – by cutting, deleting or muting sections in the Project window or by opening them in a MIDI editor.
In an editor, parts on different lanes will be treated just like parts on different tracks – you can use the part list pop-up menu to select an active part for editing, etc.
Note that there is no playback priority between lanes on a MIDI track – all unmuted parts will be heard during playback.
4. To merge all overlapping parts into one, make sure the MIDI track is selected, position the left and right locator around the parts and select "Merge MIDI in Loop" from the MIDI menu.
In the dialog that appears, activate the Erase Destination option and click OK. This merges all unmuted MIDI between the locators to a single part.
5. To turn off Lanes mode, select "Lanes Off" from the Lane Display Type pop-up menu.

Range editing

Editing in the Project window isn't necessarily restricted to handling whole events and parts. You can also work with selection ranges, which are independent from the event/part and track boundaries.

Creating a selection range

To make a selection range, drag with the Range Selection tool.



When the Range Selection tool is selected, the Select submenu on the Edit menu has the following items for making selection ranges:

Option	Description
All	Makes a selection that covers all tracks, from the start of the project to the end (as defined by the Length setting in the Project Setup dialog).
None	Removes the current selection range.
Invert	Only used for event selection (see page 116).
In Loop	Makes a selection between the left and right locator, on all tracks.
From Start to Cursor	Makes a selection on all tracks, from the start of the project to the project cursor.
From Cursor to End	Makes a selection on all tracks, from the project cursor to the end of the project.
All on Selected Tracks	Only used for event selection (see page 116).
Select Event	This is available in the Sample Editor (see page 379).
Left Selection Side to Cursor	Moves the left side of the current selection range to the project cursor position.
Right Selection Side to Cursor	Moves the right side of the current selection range to the project cursor position.

- Double clicking on an event with the Range Selection tool creates a selection range encompassing the event.

If you hold down [Shift] you can double click several events in a row, and the selection range will expand to encompass them all. Double clicking a second time on an event opens it for editing in the Sample Editor.

Adjusting the size of the selection range

You can adjust the size of a selection range in the following ways:

- By dragging its edges.

The pointer takes the shape of a double arrow when you move it over an edge of the selection range.


- By holding down [Shift] and clicking.

The closest selection range edge will be moved to the position at which you clicked.

- By adjusting the selection range start or end position on the info line.

- By using the Trim buttons on the toolbar.

The left Trim buttons will move the start of the selection range and the right buttons will move the end. The edges will be moved by the amount specified on the Grid pop-up.

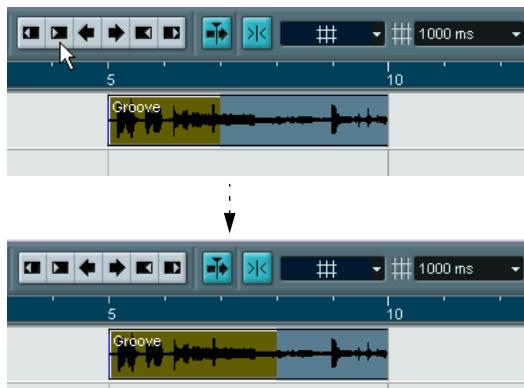

This Trim button will move the end of the selection range to the right by 1 second.

- By using the Nudge buttons on the toolbar.

These will move the whole selection range to the left or the right. The amount of movement depends on the selected display format (see [page 97](#)) and the value specified on the Grid pop-up menu.

- Note that the contents of the selection are not moved – using the Nudge buttons is the same as adjusting the start and end of the selection range at the same time, by the same amount.**


- **The Trim buttons and the Nudge buttons are located in the Nudge palette, which is not visible in the toolbar by default.**

See [page 712](#) for instructions on how to show and hide items in the toolbar.

Making selection ranges for several non-contiguous tracks

As described above, selection ranges can cover several tracks. However, it is also possible to exclude tracks from a selection range:

1. Create a selection range from the first to the last desired track.
2. Press [Ctrl]/[Command] and click in the selection range on the tracks you want to exclude from the selection.

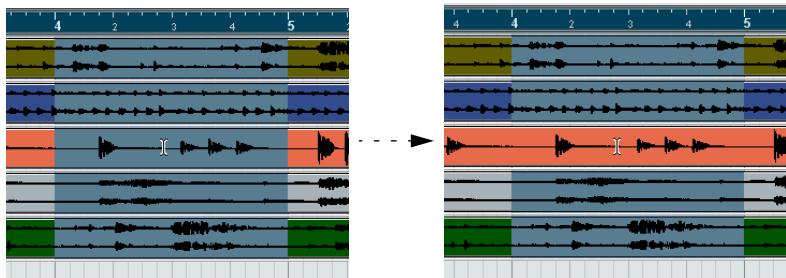

3. In the same manner, you can add a track to the selection range by [Ctrl]/[Command]-clicking in the selection range area on the track.

Moving and duplicating

- To move a selection range, click and drag it to a new position.
This will move the contents of the selection range to the new position. If the range intersected events or parts, these will be split before moving, so that only the sections within the selection range are affected.
- To duplicate a selection range, hold down [Alt]/[Option] and drag.
You can also use the Duplicate, Repeat and Fill Loop functions, just as when duplicating events (see [page 119](#)).

Using Cut, Copy and Paste

When working with selection ranges, you can either use Cut, Copy and Paste on the Edit menu, or use the functions “Cut Time” and “Paste Time” on the Range submenu on the Edit menu. These work differently to their related functions on the Edit menu:

Function	Description
Cut	Cuts out the data in the selection range and moves it to the Clipboard. The selection range is replaced by empty track space in the Project window, meaning that events to the right of the range keep their positions.
Copy	Copies the data in the selection range to the clipboard.
Paste	Pastes the clipboard data at the start position and track of the current selection. Existing events are not moved to make room for the pasted data.
Paste at Origin	Pastes the clipboard data back at its original position. Existing events are not moved to make room for the pasted data.
Cut Time	Cuts out the selection range and moves it to the Clipboard. Events to the right of the removed range are moved to the left to fill out the gap.
Paste Time	Pastes the clipboard data at the start position and track of the current selection. Existing events are moved to make room for the pasted data.
Paste Time at Origin	Pastes the clipboard data back at its original position. Existing events are moved to make room for the pasted data.

Deleting selection ranges

Again, you can either use “regular” Delete or “Delete Time”:

- If you use the Delete function on the Edit menu (or press [Backspace]), the data within the selection range is replaced by empty track space. Events to the right of the range keep their position.
- If you use “Delete Time” on the Edit menu’s Range submenu, the selection range is removed and events to the right are moved to the left to close up the gap.

Other functions

On the Range submenu on the Edit menu, you will find three more range editing functions:

Function	Description
Split	Splits any events or parts that are intersected by the selection range, at the positions of the selection range edges.
Crop	All events or parts that are partially within the selection range are cropped, that is, sections outside the selection range are removed. Events that are fully inside or outside the selection range are not affected.
Insert Silence	Inserts empty track space from the start of the selection range. The length of the silence equals the length of the selection range. Events to the right of the selection range start are moved to the right to "make room". Events that are intersected by the selection range start are split, and the right section is moved to the right.

Region operations

Regions are sections within a clip, with various uses. While regions are perhaps best created and edited in the Sample Editor (see [page 382](#)), the following region functions are available on the Audio menu in the Project window:

Function	Description
Event or Range as Region	This function is available when one or several audio events or selection ranges are selected. It creates a region in the corresponding clip, with the start and end position of the region determined by the start and end position of the event or selection range within the clip.
Events from Regions	This function is available if you have selected an audio event whose clip contains regions within the boundaries of the event. The function will remove the original event and replace it with event(s) positioned and sized according to the Region(s).

Options

Snap

The Snap function helps you to find exact positions when editing in the Project window. It does this by restricting horizontal movement and positioning to certain positions. Operations affected by Snap include moving, copying, drawing, sizing, splitting, range selection, etc.

- You turn Snap on or off by clicking the Snap icon in the toolbar.



Snap activated.

- When you are moving audio events with Snap activated, it isn't necessarily the beginning of the event that is used as Snap position reference. Instead, each audio event has a snap point, which you can set to a relevant position in the audio (such as a downbeat, etc.).

The snap point is preferably set in the Sample Editor since it will allow for a higher degree of precision (see [page 376](#)). You can however also set the snap point directly in the Project window, in the following way:


1. Select an event.
2. Place the project cursor at the desired position within the selected audio event.
3. Pull down the Audio menu and select "Snap Point To Cursor".

The snap point is set at the cursor position.



The snap point for an event is displayed as a blue line in the Project window.


Exactly how Snap works depends on which mode is selected on the Snap mode pop-up menu.

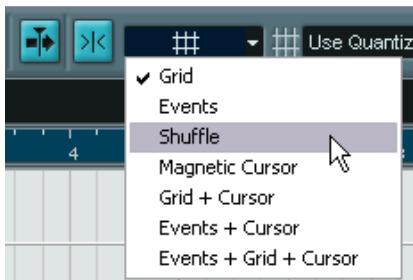

The following sections describe the different Snap modes:

Grid

In this mode, the Snap positions are set with the Grid pop-up menu to the right. The options depend on the display format selected for the ruler. For example, if the ruler is set to show bars and beats, the grid can be set to bars, beats or the quantize value set with the next pop-up menu to the right. If a time- or frame-based ruler format is selected, the grid pop-up menu will contain time- or frame-based grid options, etc.

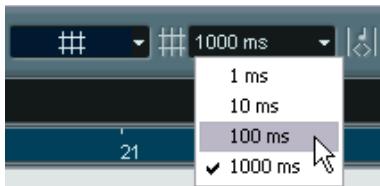

When seconds is selected as ruler format, the grid pop-up menu contains time-based grid options.


Events

In this mode, the start and end positions of other events and parts become “magnetic”. This means that if you drag an event to a position near the start or end of another event, it is automatically aligned with the start or end of the other event. For audio events, the position of the snap point is also magnetic (see [page 376](#)).


- Note that this includes marker events on the marker track. This allows you to snap events to marker positions, and vice versa.

Shuffle


Shuffle mode is useful when you want to change the order of adjacent events. If you have two adjacent events and drag the first one to the right, past the second event, the two events will change places.

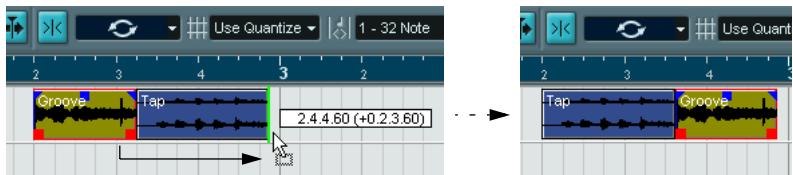

The same principle works when changing the order of more than two events:



Dragging event 2 past event 4...



...changes the order of events 2, 3 and 4.

Magnetic Cursor

When this mode is selected, the project cursor becomes “magnetic”. Dragging an event near the cursor causes the event to be aligned with the cursor position.

Grid + Cursor

This is a combination of the “Grid” and “Magnetic Cursor” modes.

Events + Cursor

This is a combination of the “Events” and “Magnetic Cursor” modes.

Events + Grid + Cursor

This is a combination of the “Events”, “Grid” and “Magnetic Cursor” modes.

Snap to Zero Crossing

When this option is activated in the Preferences dialog (Editing–Audio page), splitting and sizing of audio events is done at zero crossings (positions in the audio where the amplitude is zero). This helps you avoid pops and clicks which might otherwise be caused by sudden amplitude changes.

-
- This setting affects all windows in all open projects – with the exception of the Sample Editor (which has its own Snap to Zero Crossing button).
-

Autoscroll



Autoscroll activated.

When this option is activated, the waveform display will scroll during playback, keeping the project cursor visible in the window.

- If the option “Stationary Cursor” is activated in the Preferences dialog (Transport page), the project cursor will be positioned in the middle of the screen (if possible).

6

Folder tracks

About folder tracks



Just as the name implies, a folder track is a folder that contains other tracks. Moving tracks into a folder is a way to structure and organize tracks in the Project window. For example, grouping several tracks in a folder track makes it possible for you to “hide” tracks (thus giving you more working space on the screen). You can solo and mute several tracks in a quicker and easier way, and perform editing on several tracks as one entity. Folder tracks can contain any type of track including other folder tracks.

Handling folder tracks

Creating a folder track

Folder tracks are created just like any other track: Select “Add Track” from the Project menu and select “Folder” from the submenu that appears.

Moving tracks into a folder


You can move any type of track into a folder by using drag and drop:

1. In the Track list, click on a track that you want to move into a folder, and drag it onto a folder track.

A green arrow pointing to a folder appears when you drag the track onto the folder track in the list.

2. Release the mouse button.

The track is now placed in the folder track, and all parts and events on the track will be represented by a corresponding folder *part* (see [page 145](#)), that is a graphical representation of all parts and events in the folder.

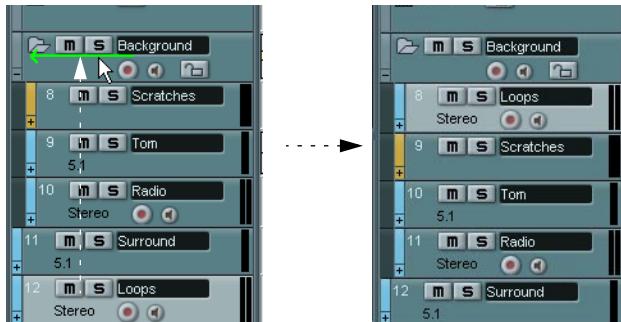

Since you can move any type of track into a folder track, it is possible to create sub-folders by moving one folder track into another. This is called “nesting”. For example, you could have a folder containing all the vocals in a project, and each vocal part could have a nested folder containing all the takes, in a subfolder for easier handling etc.

Removing tracks from a folder

To remove a track from a folder, simply drag it out of the folder and release it in the Track list.

Hiding/showing tracks in a folder

You can hide or show the tracks located in a folder by clicking on the "Show/Hide" button (the plus sign) in the Track list for the folder track. Hidden tracks are still played back as usual.



When a folder is “closed” this way, the folder part(s) still give you a graphic representation of the parts and events within the folder.

Muting and soloing folder tracks

One of the main advantages of using folder tracks is that they provide you with a way to mute and solo several tracks as one unit. Muting and soloing a folder track affects all tracks in the folder. You can also solo or mute individual tracks in the folder.

Muting a folder track

You can mute a folder track (and thereby mute all tracks within it) the same way you mute other tracks by clicking in the Mute (“M”) button in the Track list.

Soloing a folder track

You can solo a folder track (and thereby mute all tracks outside the folder) the same way you solo other tracks, by selecting it and clicking the Solo button.

Soloing or muting tracks within a folder

This can be done by showing the tracks in the folder and using the Mute and Solo buttons in the Track list as usual for any tracks inside the folder.

Working with folder parts

A folder part is a graphic representation of events and parts on the tracks in the folder. Folder parts indicate the position and length of the events and parts, as well as on which track they are (their vertical position). If part colors are used, these are also shown in the folder part.



Folder parts are created automatically when there are parts or events on the tracks within the folder. The following rules apply:

- If there is a gap between parts/events on the tracks, there will be two separate folder parts.
- Parts or events that overlap within the folder may be represented by the same folder part or by two different folder parts – depending on how much they overlap.

If a part/event overlaps by half its length or less it will be placed in a new folder part.



The MIDI part overlaps the audio events by more than half its length, which means it is included in the same folder part.



If you move the MIDI part slightly to the right, the overlap is less than half its length. This means a new folder part is created.

Handling and editing folder parts


Any Project window editing you perform to a folder part affects all its contained events and parts (those elements on the track within the folder that are represented by the folder part). You can select several folder parts if you like – this allows you to handle and edit them together. The editing you can perform includes:

- Moving a folder part. This will move its contained events and parts (possibly resulting in other folder parts, depending on how the parts overlap).
- Using cut, copy and paste.
- Deleting a folder part. This will delete its contained events and parts.
- Splitting a folder part with the Scissors tool (see the example below).
- Gluing folder parts together with the Glue tube tool. This will only work if the adjacent folder parts contain events or parts on the same track.
- Resizing a folder part resizes the contained events and parts according to the selected resizing method. This is set by clicking the Arrow tool icon on the toolbar and selecting either “Normal Sizing” or “Sizing Moves Contents” from the pop-up menu – see [page 122](#). The third option on the pop-up, “Sizing Applies Time Stretch” cannot be used to resize folder parts.
- Muting a folder part. This will mute its contained events and parts.

In short, most of the editing you can do in the Project window applies to folder parts as well.

An example

Splitting the folder part with the Scissors tool...

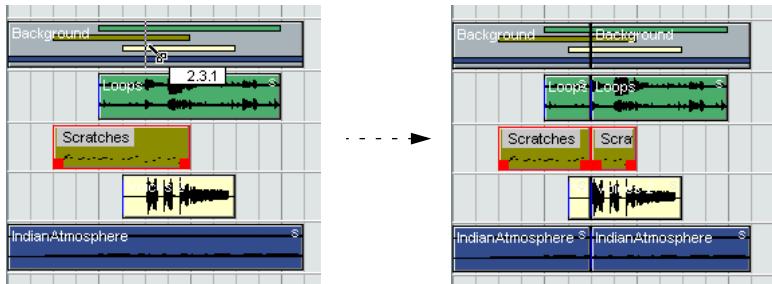

...will split all contained parts or events present at that position.

Editing tracks within folder parts

Tracks inside a folder can be edited as one entity, by performing the editing directly on the folder part containing the tracks as explained above. You can also edit individual tracks within the folder, by showing the contained tracks, selecting parts and opening editors as usual.

Double clicking a folder part opens the editors for the corresponding track classes present in the folder. The following applies:

- All MIDI parts located on the tracks within the folder are displayed as if they were on the same track, just like when opening the Key Editor with several MIDI parts selected.
To be able to easily discern the different tracks in the editor, give each track a different color in the Project window and use the “Part Colors” option in the editor (see [page 547](#)).
- If the folder contains tracks with audio events and/or audio parts, the Sample and/or Audio Part Editors are opened, with each audio event and audio part in a separate window.

7

Using markers

About markers


Markers are used to quickly locate any position. If you often find yourself jumping to a specific position, you can set up that position as a marker. There are two types of markers:

- Cycle markers, which allow you to store the start and end positions of a range.
- Standard markers which store a specific position.

Markers can be created and edited in several ways:

- By using the Marker window (see below).
- By using the Marker track (see [page 154](#)).
- By using key commands (see [page 159](#)).
- By using the Project Browser (see [page 160](#)).
- **The left and right locators are handled separately – see [page 32](#).**

The Marker window

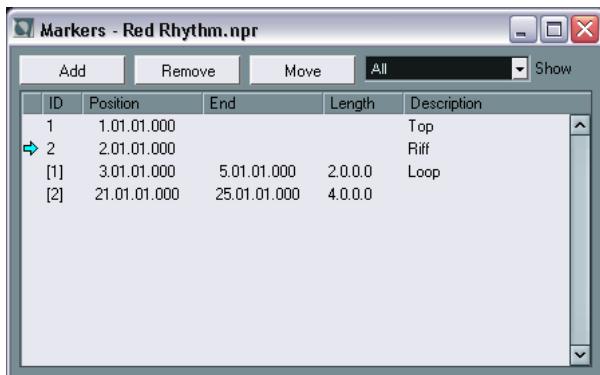

In the Marker window you can perform most editing operations concerning markers. Markers are displayed sequentially starting from the top of the window in the order that they occur in the project. Most functions in the Marker window are also available in the Inspector when the Marker track is selected.

To open the Marker window, select “Markers” from the Project menu, click the “Show” button in the Marker section on the Transport panel or use the key command (by default [Ctrl]/[Command]-[M]).

The Marker window columns

The Marker window is divided into six columns which are used for performing the following operations:

- The leftmost column is the Locate column.
Clicking in this column will move the project cursor to the corresponding Marker position. A blue arrow indicates the Marker at the project cursor position (or the closest marker before the project cursor).
- The ID column is used to edit marker ID-numbers.
See [page 153](#).
- The Position column displays the markers' time positions (or start positions for cycle markers).
The marker positions can be edited directly in this column.
- The End and Length columns display the end positions and length of cycle markers – see [page 154](#).
These values can also be edited directly in the respective column.
- The Description column lets you enter names or descriptions for markers.

Adding and removing markers in the Marker window

You add position markers (in Stop mode, during playback or during recording) by clicking the Add button or by pressing [Insert] on the computer keyboard. Markers are always added at the current project cursor position.

- To add a cycle marker, select “Cycle Markers” from the Show pop-up menu and click the Add button.
This adds a cycle marker between the left and right locator. You can also draw cycle markers on the Marker track (see [page 155](#)).
- To remove a marker, select it and click the Remove button.

Moving marker positions in the Marker window

The Move button in the Marker window can be used to “reprogram” marker positions. Proceed as follows:

- 1.** Set the project cursor to the position to which you want to move (or re-program) a marker.
- 2.** Select the marker which you want to change in the Marker window.
Do not select the marker by clicking in the leftmost column, as this will move the project cursor you set up in the previous step.
 - If a cycle marker is selected, the Move operation affects the cycle marker start position.
The length of the range is not affected.
- 3.** Click the Move button.

You can also move markers by editing their position numerically in the Position column.

About marker ID-numbers

Each time you add a marker it is automatically and sequentially assigned an ID-number, starting from ID 1 and onwards. ID numbers can be changed at any time if needed – this allows you to assign specific markers to key commands (see below).

IDs for cycle markers are shown in brackets and start from [1]. These may also be changed, for the same reason.


Assigning markers to key commands

As explained earlier, marker ID-numbers are assigned automatically and sequentially each time you add a marker. The nine first markers (1-9) can be recalled by using key commands – by default these are [Shift]-[1] to [9] on the typewriter part of the keyboard. This means that even if you have more than nine markers, you cannot use key commands to navigate to markers numbered 10 or higher.

If you want to keep all current markers, but want to specify which markers should be accessed with key commands, the solution is to reassign the marker ID-numbers. Proceed as follows:

1. First decide which of the current markers with an ID between 1 and 9 you want to reassign to a new ID-number, and thus remove its key command assignment.
Memorize the ID-number.
2. Type in this ID-number in the ID column of the marker you want to access with a key command and press enter.
The two marker ID-numbers are switched, and the key commands now locates to the marker selected in this step.
3. Repeat as necessary for other markers.
 - You can also simply remove a marker with an ID-number between 1 to 9 to free up a key – see [page 151](#).
 - For more about marker key commands, see [page 159](#).

Using the Marker track

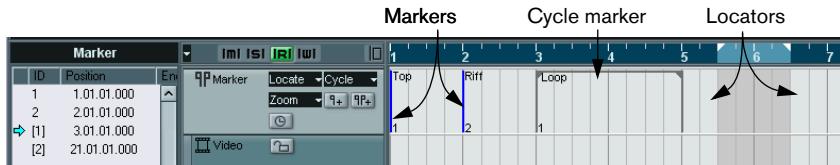

The Marker track is used for viewing and editing markers. Markers shown on the Marker track are exactly the same as shown in the Marker window, and any changes made on the Marker track are reflected in the Marker window and vice versa. Standard position markers in the Marker track are shown as marker events, vertical lines with the marker name (if assigned) and number beside it. If you select the Marker track, all markers are shown in the Inspector, much like in the Marker window.

About cycle markers

Cycle markers are shown on the Marker track as two markers bridged by a horizontal line. Cycle markers are ideal for storing sections of a project. By setting cycle markers for sections of a song, for example "Intro", "Verse", "Chorus" etc., this enables you to quickly navigate to the song sections, and also to optionally repeat the section (by activating Cycle on the Transport panel).

In addition, Cycle markers appear on the horizontal Zoom pop-up menu in the Project window. If you select a Cycle marker from the pop-up menu, the screen is automatically zoomed to encompass the Cycle marker range.

Opening the Marker track

To open the Marker track, select "Marker" from the Project menu – Add Track submenu. You can only have one Marker track in a project.

Editing markers on the Marker track

The following basic editing functions can be performed directly on the Marker track:

- Adding position markers “on the fly”.

Use the [Insert] key or the “Add Marker” button in the Track list for the Marker track to add position markers at the current cursor position during playback.



Add Marker/Add Cycle Marker buttons

- Adding a cycle marker at the left and right locator positions.

Clicking the “Add Cycle Marker” button in the Track list for the Marker track adds a cycle marker spanning the area between the left and right locator.

- Selecting markers.


You can use standard selection techniques like dragging to make a selection rectangle or using [Shift] to select separate markers.

- Drawing position markers.

By clicking with the Pencil tool (or pressing [Alt]/[Option] and clicking with the Arrow tool), you can create or “draw” position marker events at any position on the track. If snap is activated on the toolbar, this determines at which positions you can draw markers.

- Drawing cycle markers.


To draw a cycle marker range, you press [Ctrl]/[Command] and use the Pencil tool or the Arrow tool. Snap settings are applied if activated.

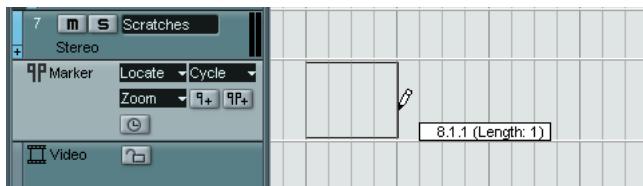

-
- Cycle markers can freely overlap.
-

- **Resizing a cycle marker.**

Select a cycle marker by clicking on it. As you can see, two handles appear at the bottom of the start and end events. If you click and hold one of the handles you can drag the event left or right to resize the cycle marker. This can also be done numerically on the info line.

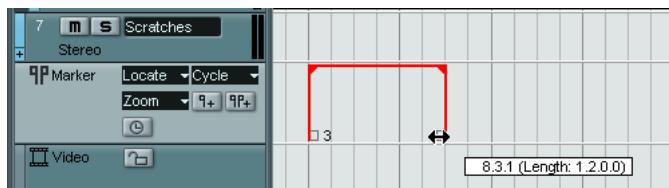

- **Moving markers.**

Click and drag to move the selected markers, or edit marker positions on the info line. As usual, snap is taken into account if activated.

- **Removing markers.**

This is done exactly the same way as for other events, i.e. by selecting and pressing [Delete], using the Erase tool etc.

- **Naming markers.**

A selected marker's name can be edited by clicking the name on the info line.

Navigating using cycle markers

Cycle markers represent ranges rather than single positions. Therefore you don't use them for moving the project cursor, but for moving the left and right locators:

- If you double click on a cycle marker, or select it from the Cycle pop-up menu in the Track list, the left and right locators are moved to encompass the cycle marker.

To move the project cursor position to the start or the end of the cycle marker, move it to the corresponding locator (e.g. by using the numeric pad keys [1] and [2]).

- You can also use key commands for this – see [page 159](#).

Zooming to cycle markers

- By selecting a cycle marker on the Zoom pop-up menu, the event display is zoomed in to encompass the selected range only.

You can also do this by pressing [Alt]/[Option] and double clicking on the cycle marker in the event display.

Editing cycle markers using tools

Cycle markers can be edited on the Marker track using the following tools. Note that the snap value applies as with regular events:

Tool	Use
Pencil	Press [Ctrl]/[Command] and use the Pencil tool to create new ranges (as described above).
Eraser	Click with the Eraser tool to delete a cycle marker. If you hold down [Alt]/[Option] when you click, all consecutive markers will also be deleted.
Selection Range	This is described on page 158 .

The other tools cannot be used with cycle markers.

Using markers to make range selections in the Project window

Besides enabling you to quickly move the project cursor and locators, markers can be used in conjunction with the Range Selection tool to make range selections in the Project window. This is useful if you quickly want to make a selection that spans all tracks in the project.

- Double click with the Range Selection tool between any two markers – this creates a selection range between the markers, spanning all tracks in the project (just as if you had used the Range Selection tool to draw a rectangle).

Any functions or processing you perform will now affect the selection only.

Moving and Copying parts

This is a quick way to move or copy complete sections of the project (on all tracks):

1. Set markers at the start and end of the section you want to move or copy.
 2. Select the Range Selection tool and double click on the Marker track between the markers.
Everything in the project within the cycle marker boundaries is selected.
 3. Click on the Marker track in the selected range and drag the range to a new position.
The selection in the Project window is moved to the same position.
- If you hold down [Alt]/[Option] while you drag the range, the selection in the Project window is copied instead.

Marker key commands

You can use key commands for the following marker operations:

Operation	Description	Default key
Insert Marker	Creates a new marker at the current project cursor position.	[Insert]
Locate Next Marker	Moves the project cursor to the right to the next marker position (if any).	[Shift]-[N]
Locate Previous Marker	Moves the project cursor to the left to the previous marker position (if any).	[Shift]-[B]
To Marker 1-9	Moves the project cursor to the specified marker (number 1 to 9).	[Shift]-[1] to [9]
Set Marker 1-9	Moves the specified marker (number 1 to 9) to the current project cursor position.	[Ctrl]-[1] to [9]
Recall Cycle Marker 1-9	Moves the left and right locators to encompass the specified cycle marker (1 to 9).	[Shift]-[Pad1] to [Pad9]

If you need to change the key command assignments, the marker commands can be found in the Transport category in the Key Commands dialog.

- For the [Shift]-[Pad1] to [Pad9] commands to work, Num Lock must be deactivated on the computer keyboard!

Editing markers in the Project Browser

- To view and edit markers in the Project Browser, the Marker track must be added to the Project window.
-

If you have a Marker track in the Project window, you can create and edit all marker parameters, including marker ID's, in the Project Browser. Proceed as follows:

1. Open the Project Browser by selecting it on the Project menu.
 2. Select "Marker" in the Project Structure window.
A list of the markers is shown in the main Browser window.
 3. Now you can edit marker names, positions and ID numbers, by selecting an item and typing in values as usual in the main editor window.
For details about editing in the Project Browser see [page 577](#).
- You can use the Add pop-up menu and Add button to insert new markers or cycle markers when the Marker track is selected in the Project Browser.
This works just like the Add button in the Marker window (see [page 151](#)).

8


Fades and crossfades

Creating fades

There are two main types of fade-ins and fade-outs in audio events in Nuendo: fades created by using the fade handles (see below) and fades created by processing (see [page 164](#)).

Fades created by using the fade handles

Selected audio events have blue handles in the upper left and right corners. These can be dragged to create a fade-in or fade-out respectively.



Creating a fade-in. The fade is automatically reflected in the shape of the event's waveform, giving you a visual feedback of the result when you drag the fade handle.

Fades created with the handles are not applied to the audio clip as such but calculated in real time during playback. This means that several events referring to the same audio clip can have different fade curves. It also means that having a huge number of fades may demand a lot of processor power.

- If you select multiple events and drag the fade handles on one of them, the same fade will be applied to all selected events.
- A fade can be edited in the Fade dialog, as described on the following pages. You open the dialog by double clicking in the area above the fade curve, or by selecting the event and selecting “Open Fade Editor(s)” from the Audio menu (note that this will open two dialogs if the event has both fade-in and fade-out curves).
If you adjust the shape of the fade curve in the Fade dialog, this shape will be maintained when you later adjust the length of a fade.
- You can make the fade longer or shorter at any time, by dragging the handle. You can actually do this even without selecting the event first, i.e. without visible handles. Just move the mouse pointer along the fade curve until the cursor turns into a bi-directional arrow, then click and drag.
- If the option “Show Event Volume Curves Always” is activated in the Preferences dialog (Event Display–Audio page), the fade curves will be shown in all events, regardless of whether they are selected or not.
If the option is deactivated, the fade curves are shown in selected events only.

Creating and adjusting fades with the Range Selection tool




“Handle-type” fades can also be created and adjusted with the Range Selection tool, in the following way:

1. Select a section of the audio event with the Range Selection tool.
The result depends on your selection, in the following way:
 - If you select a range from the beginning of the event, a fade-in will be created within the range.
 - If you select a range that reaches the end of an event, a fade-out will be created in the range.
 - If you select a range encompassing a middle section of the event, but not reaching neither the start nor the end, both a fade-in and a fade-out will be created *outside* of the selected range. In other words, the fade-in will cover the area from the beginning of the event to the beginning of the selected range, and the fade-out will cover the area from the end of the selected range to the end of the event.
2. Pull down the Audio menu and select “Adjust Fades to Range”.
The fade areas are adjusted according to the selection range.

-
- You can select multiple audio events on separate tracks with the Range Selection tool, and apply the fade to all of them simultaneously.
-

About the volume handle

A selected audio event also has a blue handle in the top middle. This is the volume handle, and it provides a quick way of changing the volume of an event, directly in the Project window. It stands in direct correlation with the volume setting in the info line, that is, dragging the volume handle also changes the value in the info line.

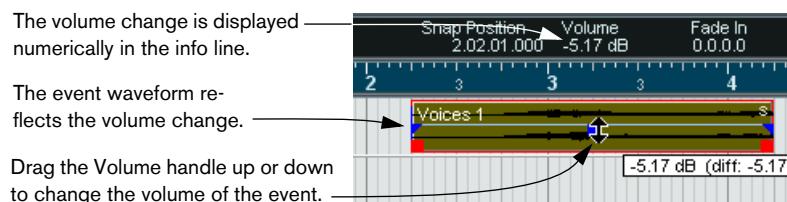

Removing fades

To remove a fade, select the event and select “Remove Fades” from the Audio menu.

You can also use the Range Selection tool to remove fades and crossfades:

1. Drag the Range Selection tool in the Project window, so that the selection encloses all of the fades and crossfades you wish to remove.
2. Select “Remove Fades” from the Audio menu.

Fades created by processing

If you have selected an audio event or a section of an audio event (using the Range Selection tool), you can apply a fade-in or fade-out to the selection by using the “Fade In” or “Fade Out” functions on the Process submenu on the Audio menu. These functions open the corresponding Fade dialog, allowing you to specify a fade curve.

-
- Note that the length of the fade area is determined by your selection. In other words, you specify the length of the fade before you enter the Fade dialog.

 - Also note that you can select multiple events and apply the same processing to all of them simultaneously.
-

Fades created this way are applied to the audio clip rather than to the event. This has the following consequences:

- If you later create new events that refer to the same clip, these will have the same fades.
- At any time you can remove or modify the fades using the Offline Process History (see [page 354](#)).


If other events refer to the same audio clip, you will be asked whether you want the processing to be applied to these events or not.

- Continue will apply the processing to all events that refer to the audio clip.
- New Version will create a separate, new version of the audio clip for the selected event.

- You can also choose to put a checkmark in the “Do not ask this message again” box. Regardless of whether you then choose “Continue” or “New Version”, any and all further processing you do will conform to the option you select.
-
- You can change this setting at any time in the Preferences dialog (Editing-Audio page), under “On Processing Shared Clips”.

The Fade dialogs

The Fade dialogs appear when you edit an existing fade or use the “Fade In”/“Fade Out” functions on the Audio menu’s Process submenu. The picture below shows the Fade In dialog; the Fade Out dialog has identical settings and features.

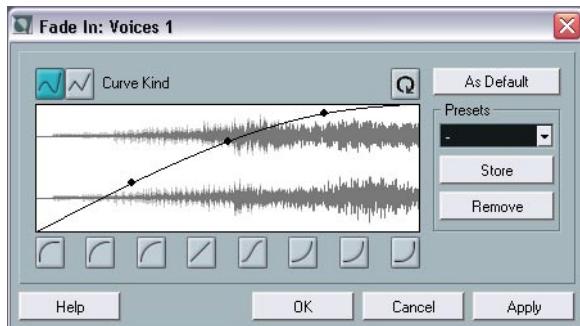

- If you open the Fade dialog(s) with several events selected, you can adjust the fade curves for all these events at the same time.
This is useful if you want to apply the same type of fade-in to more than one event, etc.

Curve Kind

These buttons determine whether the fade curve should consist of spline curve segments (left button) or linear segments (right button).

Fade display

Shows the shape of the fade curve. The resulting waveform shape is shown in dark grey, with the current waveform shape in light grey.

You can click on the curve to add points, and click and drag existing points to change the shape. To remove a point from the curve, drag it outside the display.

Restore button

The Restore button (to the right above the fade display) is only available when editing fades made by dragging the fade handles. Click this to cancel any changes you have made since opening the dialog.

Curve shape buttons

These buttons give you quick access to some common curve shapes.

Default button

Clicking the “As Default” button stores the current settings as the default fade. This shape will be used whenever you create new fades.

Presets

If you have set up a fade-in or fade-out curve that you may want to apply to other events or clips, you can store it as a preset by clicking the Store button.

- To apply a stored preset, select it from the pop-up menu.
- To rename the selected preset, double click on the name and type a new one.
- To remove a stored preset, select it from the pop-up menu and click Remove.

-
- Stored fade-in presets will only appear in the Fade In dialog, and fade-out presets will only appear in the Fade Out dialog.**
-

Preview, Apply and Process

The buttons in the bottom row are different depending on whether you are editing a fade made with the fade handles or applying a fade using processing:



The Edit Fade dialog.



The Process Fade dialog.

The Edit Fade dialogs have the following buttons:

Button	Function
OK	Applies the set fade curve to the event, and closes the dialog.
Cancel	Closes the dialog.
Apply	Applies the set fade curve to the event, without closing the dialog.

The Process Fade dialogs have the following buttons:

Button	Function
Preview	Plays back the fade area. Playback will repeat until you click the button again (the button is labeled "Stop" during playback).
Process	Applies the set fade curve to the clip, and closes the dialog.
Cancel	Closes the dialog without applying any fade.


Creating crossfades

Overlapping audio material on the same track can be crossfaded, for smooth transitions or special effects. You create a crossfade by selecting two consecutive audio events and selecting the Crossfade command on the Audio menu (or using the corresponding key command, by default [X]). The result depends on whether the two events overlap or not:

- If the events overlap, a crossfade is created in the overlapping area. The crossfade will be of the default shape – initially a linear, symmetric crossfade, but you can change this as described below.




Overlapping section.

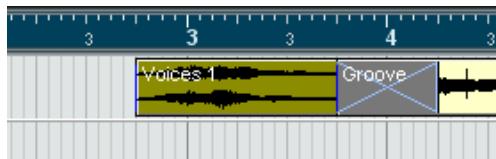


- If the events don't overlap but are directly consecutive (lined up end-to-start, with no gap) it's still possible to crossfade them – provided that their respective audio clips overlap! In this case, the two events are resized so that they overlap, and a crossfade of the default length and shape is applied.

The default crossfade length and shape are set in the Crossfade dialog (see [page 176](#)).

An example:

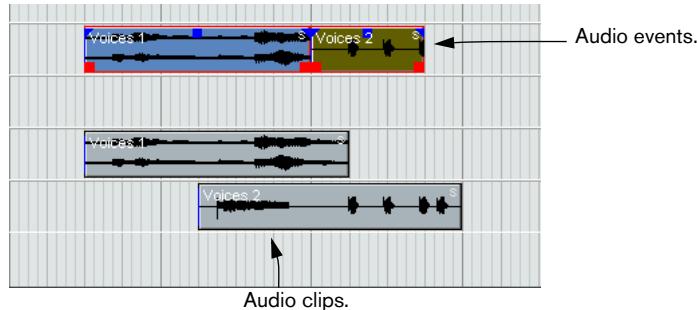

The events in themselves do not overlap, but their clips do. Therefore, the events can be resized so that they overlap, which is required for a crossfade to be created.

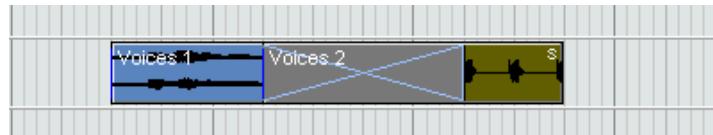

When you select the Crossfade function, the two events are resized so that they overlap, and a default crossfade is created in the overlapping section.

- If the events don't overlap, and cannot be resized enough to overlap, a crossfade cannot be created.
- Once you have created a crossfade, you can edit it by selecting one or both crossfaded events, and selecting "Crossfade" from the Audio menu again (or by double clicking in the crossfade zone). This opens the Crossfade dialog, as described below.

Removing crossfades

To remove a crossfade, select the events and select "Remove Fades" from the Audio menu, or use the Range Selection tool:

1. Drag the Range Selection tool in the Project window, so that the selection encloses all of the fades and crossfades you wish to remove.
2. Select "Remove Fades" from the Audio menu.
- You can also remove a crossfade by clicking and dragging it outside the track.

The Crossfade dialog

- The following section describes the default Crossfade dialog.

However, if you activate the option Simple Crossfade Editor in the Preferences (Editing-Audio page), a simplified dialog will be used instead (similar to the regular fade dialogs).



The Crossfade dialog is divided into two parts:

The upper part contains a display that shows the crossfade curve and the waveforms.

The lower part contains a number of common settings and controls, as well as separate settings for the fade-in and fade-out curves in the crossfade. In the center of the lower part there are two sets with identical controls: The upper set controls the fade out curve, and the lower set controls the fade-in curve.

Play buttons

- The “Play Fade Out” and “Play Fade In” buttons allow you to audition the fade-out or fade-in part only, without the crossfade.
- The “Play Crossfade” button plays back the whole crossfade.

You can also use the Transport play controls to play back the cross-faded audio events. This way, you will however play back all unmuted audio events on other tracks as well.

Pre-roll and Post-roll

When auditioning with the Play buttons, you can choose to activate pre-roll and/or post-roll. Pre-roll lets you start playback before the fade area, and post-roll lets you stop playback after the fade area. This can be useful for auditioning the fade in a context.

- To specify how long the pre- and post-rolls should be, click in the time fields and enter the desired time (in seconds and milliseconds).



- To activate pre- and post-roll, click the respective button. To deactivate, click the button again.



1 second pre-roll activated.

Curve buttons

- The curve kind buttons determine whether the corresponding fade curve should consist of spline curves (left button) or linear segments (right button).



- The curve shape buttons give you quick access to some common curve shapes.



Symmetric Fades

As previously mentioned, there are separate, identical controls for the fade out curve and the fade in curve. However, by activating “Symmetric Fades”, the controls are “linked” so that both fade curves are affected by the same amount regardless of whether you use the fade-out or fade-in controls. The actual result however, depends on which control is used. The following descriptions of the controls detail what happens when you use a certain control with “Symmetric Fades” activated.


Fade displays

Shows the shape of the fade-out and fade-in curve, respectively. You can click on the curve to add points, and click and drag existing points to change the shape. To remove a point from the curve, drag it outside the display.

Crossfade display

The top display shows the shape of the whole crossfade curve and the resulting waveform. You can perform a number of click and drag operations in this display.


Depending on whether “Symmetric Fades” is activated or not (see above), the following will happen when you click and drag the different points in the display:



1. Click and drag these points to change the length of the fade-out curve (upper) or the fade-in curve (lower), respectively.

If “Symmetric Fades” is activated, these instead change the length of both the fade out curve and the fade in curve. The length change will be applied equally to both sides, without moving the “Offset Point” (see [page 175](#)).

- Click and drag these points to move the fade-out curve (upper) or the fade-in curve (lower), respectively.
If “Symmetric Fades” is activated, these instead change the length of both the fade out curve and the fade in curve – by moving only the end or the start of the curves as well as the “Offset Point”.
- Click and drag these points to move the Offset Point (the dotted line) for the fade-out curve (upper) or the fade-in curve (lower), respectively.
Moving the Offset Point will also move the fade curve. If “Symmetric Fades” is activated, the Offset Point for both curves will be moved.
- You can also click and drag to move audio clips (along with the fade curve) in the display. The pointer takes on the shape of a hand to indicate that it's possible to move a clip.



- You can right-click (Win) or [Ctrl]-click (Mac) in the ruler and use the pop-up menu to select a time format (see [page 94](#)).
- You can scroll and zoom the display with the horizontal and vertical scroll bars and zoom controls. The standard Zoom procedures apply (see the Getting Started book).

Equal Gain and Power

- If you activate the “Equal Gain” checkbox, the fade curves are adjusted so that the summed fade-in and fade-out amplitudes will be the same all along the crossfade region.
This is often suitable for short crossfades.
- If you activate the “Equal Power” checkbox, the fade curves are adjusted, so that the energy (power) of the crossfade will be constant all along the crossfade region.

-
- Equal Power curves have only one editable curve point. You cannot use the Curve kind buttons or the presets when this mode is selected.**
-

Resizing the crossfade area

You can adjust the length of the crossfade area either in the crossfade display (as described on [page 172](#)), by using the Length sliders or by clicking in the “Length” fields, changing the value numerically and pressing [Return].

- If “Symmetric Fades” is activated, both the fade out and the fade in length will be changed by the same amount. Otherwise, the upper Length controls change the length of the fade-out curve, and the lower controls change the length of the fade-in curve.
 - If possible, the length change will be applied equally to “both sides” of the crossfade (i.e. Nuendo tries to “center” the crossfade).
-
- To be able to resize a crossfade this way, it must be possible to resize the corresponding event. For example, if the left crossfaded event already plays its audio clip to the end, its endpoint cannot be moved any further to the right.

Moving the crossfade area

You can move the crossfade area in various ways: In the crossfade display (as described on [page 172](#)), with the Nudge buttons, with the Overlap controls (either the slider or numerically) or by changing the Offset Point.

Using the Nudge controls

- When you use the Nudge controls, you can decide whether they should move the fade area or the audio clip, by clicking the corresponding radio button under “Nudge Mode”.
- Each time you click a Nudge button, the fade area or the audio event will be moved in the corresponding direction by the amount specified on the “Nudge Range” pop-up menu.

The Nudge buttons in the upper region affect the fade-out curve, and the Nudge buttons in the lower region affect the fade-in curve. Note that it is only possible to move the audio of the second event – i.e. the event that is faded in.

- You can also click in the Nudge value field, enter a numerical value and press [Return] to move a fade area or an audio event.

- If “Symmetric Fades” is activated, and the Nudge Mode is set to “Move Fade”, both the fade-out area and the fade-in area will be moved by the same amount.
- If “Symmetric Fades” is activated, and the Nudge Mode is set to “Move Audio”, the Nudge buttons in the lower region will move the audio event with the fade in.
In this mode, the Nudge buttons in the upper region will move both the entire fade area and the audio event with the fade in.

Using the Overlap controls

The Overlap controls let you move the fade area without moving the Offset Point – the “center” of the fade area (see below). This means that the “center” of the fade will be offset in relation to the fade area.

- You can either use the Overlap sliders or you can click in the Overlap fields, change the values numerically and press [Return].
- If “Symmetric Fades” is activated, both the upper and the lower Overlap controls will move both the fade-out and the fade-in area.

Changing the Offset Point

You can also move a fade area by changing its Offset Point. The Offset Point is the “center” of the fade area, i.e. the point where the volume of the event is precisely halfway between full level and zero level.

- Click in the value field, enter the desired value, in accordance with the selected display format (see [page 172](#)) and press [Return].
This will move the Offset Point along with the fade area by the specified amount. Note however that this only applies to the fade-in area!
- The Offset Point is indicated by a dotted vertical line in the crossfade display.

Changing the volume

You can use the Volume controls to change the volume of the cross-faded events. Either use the Volume sliders or click in the Volume fields, change the values numerically and press [Return].

This is the same thing as using the volume handles in the Event display, as described on [page 163](#).

Default buttons

Clicking the “As Default” button stores all of the current settings as the default crossfade. These settings will then be used whenever you create new crossfades.

Clicking the “Recall Default” button copies the curves and settings in the Default crossfade to the Crossfade dialog.

Presets

If you have set up a crossfade that you may want to apply to other events, you can store it as a preset by clicking the store button (the disk icon).

- To apply a stored preset, select it from the pop-up menu.
- To rename the selected preset, double click on the name and type in a new one.
- To remove a stored preset, select it from the pop-up menu and click the remove button (the trash icon).

Autoscroll



If this option is activated, the crossfade display will be scrolled during playback, so that the play position cursor is always visible. This works just like Autoscroll in the Project window (see [page 140](#)).

- Note that this only applies if you use the Transport play controls – not if you use the Play controls in the Crossfade dialog.

Zoom and Auto Zoom

If you have scrolled or zoomed the crossfade display horizontally (see [page 172](#)), you can click the “Zoom to Fade” button (the magnifying glass icon) to quickly revert to the standard zoom factor and center the display on the currently selected crossfade area.

If Auto Zoom is activated (checked), the crossfade display will automatically be zoomed and centered on the current crossfade if you resize it (see [page 174](#)).

Select Crossfade buttons

These allow you to select the previous/next crossfade area on the current track, if it contains more than one crossfade.

- If “Project selection follows” is activated, selecting another crossfade will automatically change the event selection in the Project window. The second event in the selected crossfade will be selected.


Auto Fades and Crossfades

Nuendo features an Auto Fade function that can be set both globally, i.e. for the entire project, and separately for each audio track. The idea behind the Auto Fade function is to create smoother transitions between events by applying short (1 - 500 ms) fade-ins and fade-outs.

- As mentioned earlier, fades are calculated in real time during playback. This means that the larger the number of audio tracks with Auto Fades activated in a project, the higher the demands on the processor.

Making global Auto Fade settings

1. To make Auto Fades settings globally for the project, select “Auto Fades Settings...” from the Project menu.
This opens the Auto Fades dialog for the project.

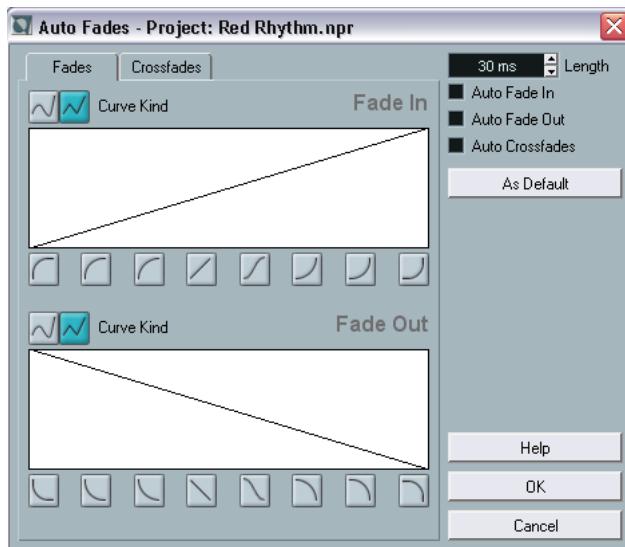

2. Use the checkboxes in the upper right corner to activate or deactivate Auto Fade In, Auto Fade Out and Auto Crossfades, respectively.
3. Use the Length value field to specify the length of the Auto Fade or Crossfade (1-500 ms).

4. To adjust the shapes of Auto Fade In and Auto Fade Out, select the "Fades" tab and make settings as in the regular Fade dialogs.
5. To adjust the shape of the Auto Crossfade, select the "Crossfades" tab and make settings as in the regular Crossfade dialog.
6. If you want to use the settings you have made in forthcoming new projects, click the "As Default" button.
The next time you create a new project, it will use these settings by default.
7. Click OK to close the dialog.

Making Auto Fade settings for a separate track

By default, all audio tracks will use the settings you have made in the project's Auto Fades dialog. However, since Auto Fades use computing power, a better approach may be to turn Auto Fades off globally, and activate them for individual tracks, as needed:

1. Right-click (Win) or [Ctrl]-click (Mac) the track in the Track list and select "Auto Fades Settings..." from the context menu (or select the track and click the "Auto Fades Settings" button in the Inspector).
The Auto Fades dialog for the track appears. This is identical to the project's Auto Fades dialog, with the addition of a "Use Project Settings" option.
2. Deactivate the "Use Project Settings" option.
Now, any settings you make will be applied to the track only.
3. Set up the Auto Fades as desired and close the dialog.

Reverting to project settings

If you want a track to use the global Auto Fade settings, open the Auto Fades dialog for the track and activate the "Use Project Settings" checkbox. This makes the track use the Auto Fade settings you have made for the project.

9

The mixer

About this chapter

This chapter contains detailed information about the elements used when mixing audio and MIDI, and the various ways you can configure the mixer.

Some mixer related features are *not* described in this chapter. These are the following:

- Setting up and using audio effects.
See [page 230](#).
- Setting up and using MIDI effects.
See [page 459](#).
- Surround Sound.
See [page 276](#).
- Automation of all mixer parameters.
See [page 294](#).
- How to mix down several audio tracks (complete with automation and effects if you wish) to a single audio file.
See [page 597](#).

Overview



The picture above shows an extended mixer (see [page 207](#)).

The mixer offers a common environment for controlling levels, pan, solo/mute status etc. for both audio and MIDI channels.

Opening the mixer

The mixer can be opened in several ways:

- By selecting Mixer from the Devices menu.
 - By clicking the Mixer icon on the toolbar
This always opens the first Mixer window (see below).



- By using a key command (by default [F3]).
 - By clicking the Mixer button in the Devices panel.
You open the Devices panel by selecting Show Panel from the Devices menu.

About mixer windows 2 - 4

You may have noticed that there are in fact four separate mixer items selectable from the Devices menu; "Mixer", "Mixer 2", "Mixer 3" and "Mixer 4". These are not separate mixers, but rather separate *windows* of the same mixer.

- Each of the four mixer windows can be configured to show any combination of channels, channel types, narrow and wide channel strips etc. (how to do this is described later in this chapter).

You can for example configure one mixer window to show MIDI channel strips, another to show input and output channels, another to show all audio channels and so on.



Mixer windows showing different configurations.

- You can also save channel configurations as View sets (see [page 193](#)) which are then accessible from all four mixer windows.

These features are very convenient when working with large projects. Considering the number of different channel types that can be shown in the mixer, they could even be described as necessary!

With the four mixer windows, combined with the ability to instantly recall different mixer configurations, you are always able to focus on the task at hand and keep window scrolling down to a minimum.

- All the various options for configuring the mixer described in this chapter are identical for all four mixer windows.

What channel types can be shown in the mixer?

The following track based channel types are shown in the mixer:

- Audio
- MIDI
- Effect return channels (FX channel tracks are referred to as effect return channels in the mixer).
- Group channels.

The order of audio, group, effect return and MIDI channel strips (from left to right) in the mixer corresponds to the Project window Track list (from the top down). If you reorder tracks of these types in the Track list, this will in turn be mirrored in the mixer.

In addition to the above, the following channel types are also shown in the mixer:

- Activated ReWire channels (see [page 670](#)).
- VST Instrument channels (see [page 264](#)).

ReWire channels cannot be reordered and always appear to the right of other channels in the main mixer pane (see below), with VSTi channels furthest to the left, followed by the ReWire channels.

Folder, Marker, Video and Automation tracks are not shown in the mixer.

Input and output busses in the mixer

Input and output busses are represented by input and output channels in the mixer. They appear in separate “panes” separated by movable dividers and with their own horizontal scrollbars. See [page 198](#).

About multichannel audio

Nuendo has full support for surround sound. Each audio channel and bus in the mixer can carry up to 12 speaker channels. This means that if you have an audio track configured for 5.1 surround sound for example, this will have a single channel strip in the mixer, just like mono or stereo tracks (although its level meter will have six meter bars, one for each speaker channel).

Another thing to note is that the look of a channel strip differs slightly depending on how it is routed – mono or stereo tracks routed to a surround output bus will have a surround panner control instead of a regular pan control, for example.

Configuring the mixer

As mentioned earlier, the mixer windows can be configured in various ways to suit your needs and to save screen space. Here follows a run through of the various view options (the following descriptions assume that you have an active project containing some tracks):


Normal vs. Extended channel strips

You have the option of selecting normal or extended channel strips and whether to show the input and output settings at the top of the channel strips. Proceed as follows:

1. Open any of the mixer windows.

The leftmost strip is called the common panel and is always shown in the mixer. This contains various global settings and options relating to the mixer. For further info see [page 197](#).

In the lower left corner of the common panel you can see a graphic representation of a row of three “channel strips”, divided into three vertical sections. The three vertical sections indicate what channel strip sections are currently visible in the mixer – if a section is lit, the corresponding panel will be visible in the mixer.



Here the middle section is dark, but the lower and upper sections are lit. This indicates that the mixer will show channel strips with the fader panel (lower section) plus the Input/Output settings panel (top section).

2. Click on the middle section so it lights up.

Now the mixer will show the extended panel for all channel strips.

3. You can show or hide the extended and top panels of the channel strips by clicking on the corresponding section in the figure.

The fader panel is always shown.

- You can also show or hide the extended and top panels by clicking the + and – buttons to the left of each section in the common panel.

The fader panel shows the basic controls – faders, pan controls and an associated vertical row of buttons. The extended panel can be set to show EQ, effect sends, insert effects, etc. The input/output settings panel contains input and output routing pop-up menus (where applicable) along with input phase switches and input gain controls.



To the left a basic channel strip with no extended options and to the right a fully extended channel strip with the input/output settings panel at the top.

Selecting what to display in the extended channel strips

You can select what to display in the extended channel strip either globally from the common panel, or individually from each channel strip.

The available options vary depending on the type of channel.

- See [page 207](#) for a description of the various options for audio channels.
- See [page 221](#) for a description of the various options for MIDI channels.


Selecting globally from the common panel

1. Open any of the mixer windows.

The leftmost strip is called the common panel and is always shown in the mixer. This contains various global settings and options relating to the mixer. For further info see [page 197](#).

2. Make sure that the extended panel of the mixer is visible.

In the extended area of the common panel you can see a vertical row of icons. These act as buttons, and determine globally what is displayed in the extended panel for all channel strips in the mixer.

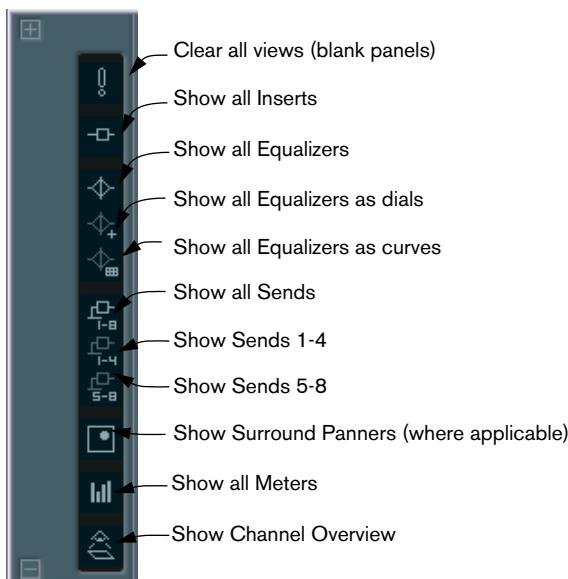

If you place the pointer on an icon a tooltip appears, describing the item.


3. Click on the “Show all Inserts” button (second icon from the top).
Now all channel strips in the mixer will show Insert effect slots in the extended panel.
 - As mentioned above, what can be set globally depends on the type of channel.
Channel types that do not support a selected global option will be unaffected.
 - If you press [Alt]/[Option] and click one of the global view buttons, input and output channels will be affected as well.

Selecting for individual channels

Each channel strip in the mixer features a View options pop-up, which is used for two things:

- To determine what is shown in the extended panel for individual channels in the mixer.
 - To set the “Can Hide” status for individual channels in the mixer.
This is described on [page 109](#).

The View options pop-up is opened by clicking the down arrow located just above the fader panel of the channel strip.

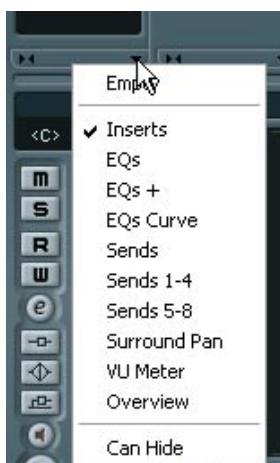

- To select what to display in the extended panel from the View options pop-up you must first open the extended mixer.

You can then use the pop-up to select what parameters to show in the extended panel for each individual channel in the mixer.

Setting the width of channel strips

Each channel strip's width can be sized to either "Wide" or "Narrow" mode by using the Narrow/Wide button. This is the two left/right arrows just above the fader strip (to the left of the View options pop-up).



The Narrow/Wide button

- Narrow channel strips contain a narrow fader, miniature buttons, plus the View options pop-up.
If you have selected to show parameters in the extended section of a narrow strip, only the channel overview is shown in narrow mode. (The parameters will be shown again, if you return to wide mode.)




Wide and narrow channel strips

- When selecting wide or narrow channel strips from the common panel View options pop-up, all channel strips are affected.

Selecting what channel types to show/hide

You can specify what channel types to show or hide in the mixer. In the lower part of the common panel you find a vertical strip with different indicator buttons. Each indicator represents a channel type to show or hide in the mixer:

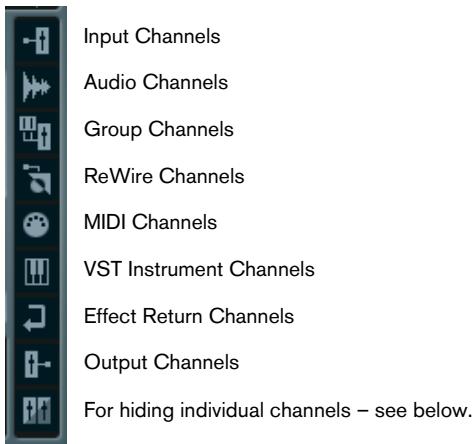


- To hide or show a channel type, click the corresponding indicator. If an indicator is dark, the corresponding channel type will be shown in the mixer. If it is orange, the corresponding channel type will be hidden.

Selecting individual channels to show/hide

You can also show/hide individual channels of any type in the mixer. This is done by first assigning channels a “Can Hide” status. After having done so you can hide all channels assigned this status at any time. Proceed as follows:

1. Pull down the View options pop-up menu for the channel you want to hide and activate the “Can Hide” option.

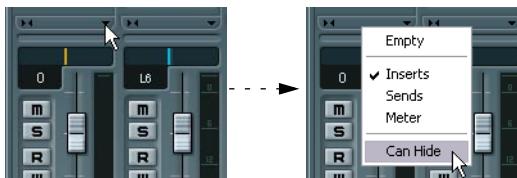

2. Repeat this for all channels you want to hide.
3. Click the bottom “hide button” in the common panel.
This hides all channels set to “Can Hide”. To show them, click the button again.




Channel view sets

Channel view sets are saved configurations of the mixer windows, allowing you to quickly switch between different layouts for the mixer. Proceed as follows:

1. Set up the mixer the way you wish to store it as a view set.
The following settings will be stored:
 - Settings for individual channel strips (e.g. narrow or wide mode and whether the channel strip is (or can be) hidden or not).
 - The hide/show status for channel types.
 - The mixer's display status (fader panel, extended panel, input/output panel)
 - Settings for what is shown in the extended view of the mixer.
 2. Click the “Store View Set” button (the plus sign) at the top of the (non-extended) common panel.
 3. A dialog appears, allowing you to type in a name for the view set.
Do so and click OK to store the current mixer view set.
 - You can now return to this stored configuration at any time, by clicking the “Select Channel View Set” button (the down arrow at the top of the common panel) and selecting it from the pop-up menu.
 - To remove a stored channel view set, select it and click the “Remove View Set” button (the minus sign).
-
- Some remote control devices (such as Steinberg’s Houston) feature this function, which means that you can use the remote device to switch between the channel view sets.

The audio channel strips

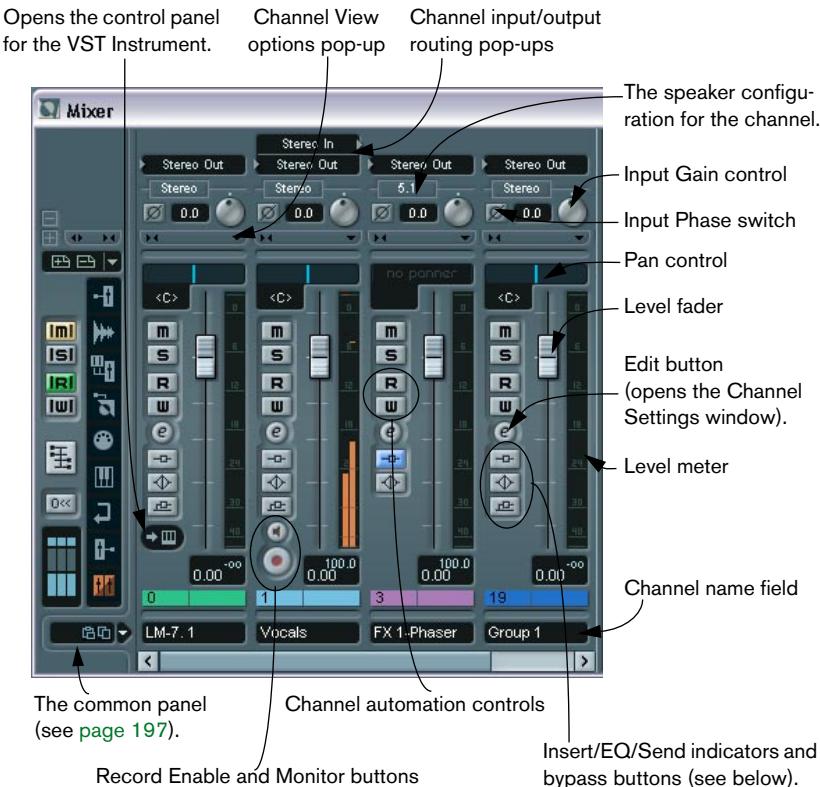

The mixer in normal mode (faders and input/output settings panel visible), showing (from left to right): the common panel, a VST Instrument channel, a stereo audio channel, an effect return channel and a group channel strip.

All audio related channel types (audio, input/output channels, group, effect return, VST Instrument or ReWire) basically have the same channel strip layout, with the following differences:

- Only audio track channels have an Input Routing pop-up, a Record Enable and Monitor button.
- Effect return channels and input/output channels do not have sends.
- VST Instrument channels have an additional button for opening the instrument's control panel.
- Input and output channels have clip indicators.


About the Insert/EQ/Send indicators and bypass buttons



The three indicator buttons in each audio channel strip have the following functionality:

- If an Insert or Send effect or EQ module is activated for a channel, the corresponding button is lit.
The effect indicators will be blue, the EQ indicator will be green.
- By clicking these buttons when lit, the corresponding EQ or effects section will be bypassed.
Bypass is indicated by yellow buttons. Clicking the button again deactivates bypass.


The MIDI channel strips

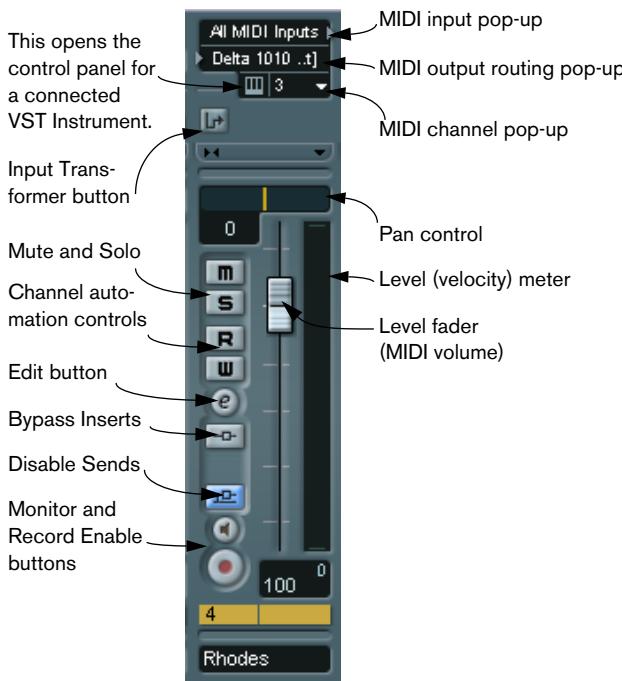

The MIDI channel strips allow you to control volume and pan in your MIDI instrument (provided that they are set up to receive the corresponding MIDI messages). The settings here are also available in the Inspector for MIDI tracks (see [page 451](#)).


The common panel

The common panel appears to the left in the mixer windows and contains settings for changing the look and behavior of the mixer, as well as global settings for all channels.

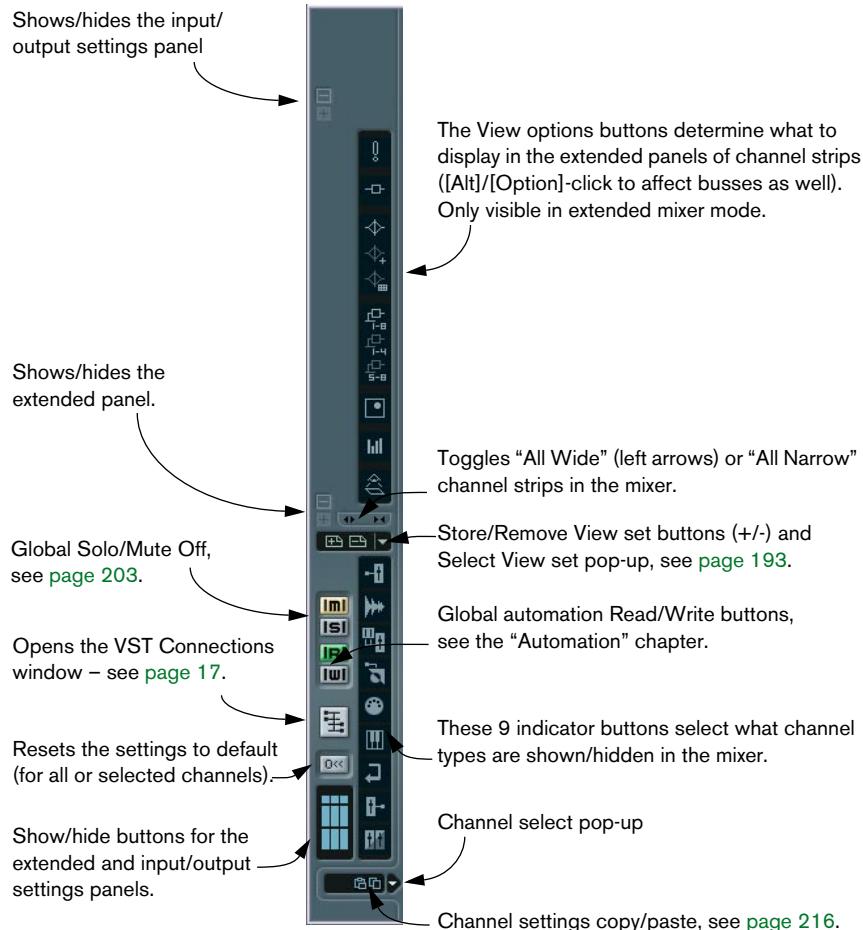

The input & output channels

The busses you have set up in the VST Connections window are represented by input and output channels in the mixer. These are shown in separate “panes” (to the left and right of the regular channel strips, respectively), with their own dividers and horizontal scrollbars. The i/o channel strips are very similar to other audio channels and are identical for input and output channels (except that input channels don’t have Solo buttons).

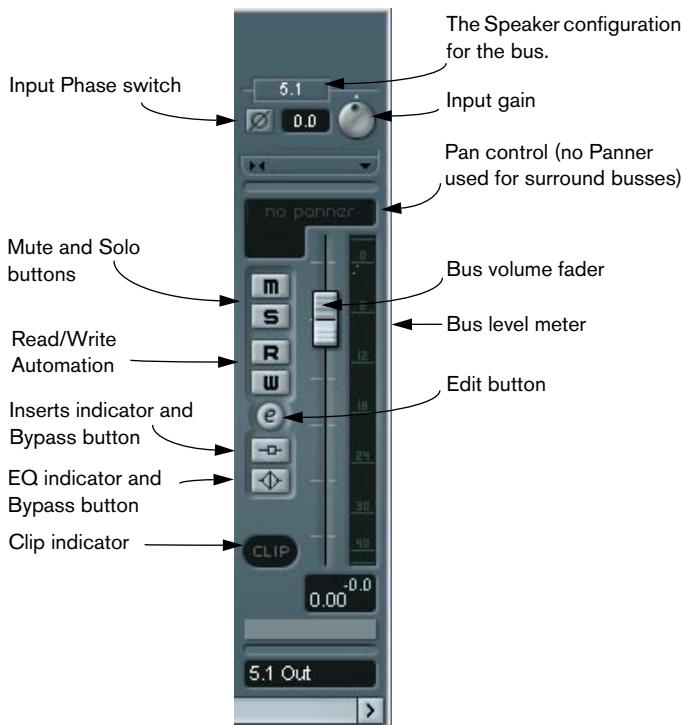

- How to set up input and output busses is described in the chapter “[VST Connections: Setting up input and output busses](#)”.
- How to route audio channels to busses is described on [page 220](#).

Basic mixing procedures

Setting volume in the mixer

In the mixer, each channel strip has a fader for volume control.

- For audio channels, the faders control the volume of the channels before they are routed directly or via a group channel to an output bus. Each channel can in turn handle up to 12 speaker channels – see [page 276](#).
- An output channel fader determines the master output level of all audio channels routed to that output bus.
- MIDI channels handle fader volume changes in the mixer by sending out MIDI volume messages to the connected instrument(s). Connected instruments must be set to respond to MIDI messages (such as MIDI volume in this case) for this to function properly.
- The fader settings are displayed numerically below the faders, in dB for audio channels and in the MIDI volume 0 to 127 value range for MIDI channels.
You can click in the fader value fields and enter a volume setting by typing.
- To make fine volume adjustments, hold down [Shift] when you move the faders.
- If you hold down [Ctrl]/[Command] and click on a fader, it will automatically be set to position 0.0 dB for audio channels, or MIDI volume 100 for MIDI channels.
Most mixer parameters can be reset to default values by [Ctrl]/[Command]-clicking this way.

You can use the faders to set up a volume balance between the audio and MIDI channels and perform a manual mix, by moving the faders and other controls while playing back. By using the Write function (see [page 303](#)), you can automate the levels and most mixer actions.

-
- It is also possible to adjust the volume of a selected audio event in the Project window or Audio Part Editor, by making volume settings on the info line, or by using the volume handle (see [page 163](#)).
-

About the level meters for audio channels

When playing back audio in Nuendo, the level meters in the mixer show the level of each audio channel.

- Directly below the level meter is a small level readout – this shows the highest registered peak level in the signal.
Click this to reset the peak levels.
- Peak levels can also be shown as static horizontal lines in the meter (there are options for how this is displayed – see [page 218](#)).

If the peak level of the audio goes above 0dB, the numerical level indicator will show a positive value (i.e. a value above 0dB).

Nuendo uses 32 bit floating point processing internally, so there is virtually limitless headroom – signals can go way beyond 0dB without clipping. Therefore:

- **Having higher levels than 0 dB for individual audio channels is not a problem in itself. The audio quality will not be degraded by this.**

However, when many high level signals are mixed in an output bus this may require that you lower the output channel level a lot (see below). Therefore it's good practice to keep the max levels for individual audio channels roughly around 0 dB.

About the level meters for input and output channels

For the input and output channels things are different. I/O channels have clip indicators.

- When you are recording, clipping can occur either before the input bus (in the audio hardware itself) or in the signal being recorded to disk (when 16 or 24 bit record format is used).
Read more about checking and setting input levels on [page 47](#).
- In the output busses, the floating point audio is converted to the resolution of the audio hardware. In the integer audio domain, the maximum level is 0dB – higher levels will cause the clip indicator for each bus to light up.

If the clip indicators light up for a bus, this indicates actual clipping – digital distortion which should always be avoided.

-
- If the clip indicator lights up for an output channel, reset the clip indicator by clicking on it, and lower the level until the indicator doesn't light up.

Adjusting Input Gain



Each audio channel and input/output channel features an Input Gain control. This controls the gain for the incoming signal, before EQ and effects.

The Input Gain is not meant to be used as a volume control in the mixer. It can, however, be used to cut or boost the gain in various circumstances:

- To change the level of a signal before the effects section.
The level going into certain effects can change the way the signal is affected. A compressor, for example, can be “driven” harder by raising the Input Gain.
- To boost the level of poorly recorded signals.

To change the Input Gain, you need to press [Shift] and adjust the control (to avoid accidental gain changes). You can also press [Alt]/[Option] – this lets you adjust the Input Gain with a fader.

- **You should set the Input Gain once and for all for a channel – it is not suited for continuous level adjustments during playback.**

Input Phase switch



Each audio channel and input/output channel has an Input Phase switch, to the left of the Input Gain control dial. When activated, the phase polarity is inverted for the signal. Use this to correct for balanced lines and mics that are wired backwards, or mics that are “out of phase” due to their positioning.

- Phase polarity is important when mixing together two similar signals. If the signals are “out of phase” with respect to one another, there will be some cancellation in the resulting audio, producing a hollow sound with less low frequency content.

About level meters for MIDI channels

The level meters for MIDI channels do not show actual volume levels. Instead, they indicate the *velocity* values of the notes played back on MIDI tracks.

About MIDI tracks set to the same MIDI channel and output

If you have several MIDI tracks set to the same MIDI channel (and routed to the same MIDI output), making volume settings for one of these MIDI tracks/mixer channels will also affect all other mixer channels set to the same MIDI channel/output combination. This also applies to pan settings.

Using Solo and Mute



The Mute (top) and Solo buttons.

You can use the Mute and Solo buttons to silence one or several channels. The following applies:

- The Mute button silences the selected channel.

Clicking the Mute button again un-mutes the channel. Several channels can be muted simultaneously. A muted channel is indicated by a lit Mute button, and also by the lit Global Mute indicator on the common panel.



A muted channel in the mixer.



A lit Global Mute indicator on the common panel shows that one or more channels are muted.

- Clicking the Solo button for a channel mutes all other channels.
A soloed channel is indicated by a lit Solo button, and also by the lit Global Solo indicator on the common panel. Click the Solo button again to turn off Solo.
- Several channels can be soloed at the same time.
However, if you press [Ctrl]/[Command] and click the Solo button for a channel, any other soloed channels will automatically be un-soloed (i.e. this Solo mode is exclusive).
- [Alt]/[Option]-clicking a Solo button activates "Solo Defeat" for that channel.
In this mode (indicated by a red solo button without any other channels being muted) the channel will not be muted if you solo another channel (see [page 252](#) for a practical use of this). To turn off Solo Defeat, [Alt]/[Option]-click the Solo button again.
- You can un-mute or un-solo all channels by clicking the Mute or Solo indicator on the common panel.

Setting pan in the mixer




The pan control.

The pan controls in the mixer are used to position a channel between the left and right side of the stereo spectrum. For stereo audio channels, pan (by default) controls the balance between the left and right channels. By selecting one of the other pan modes (see below) you can set pan independently for the left and right channel.

- To make fine pan adjustments, hold down [Shift] when you move the pan control.
- To select center pan position, hold down [Ctrl]/[Command] and click on the pan control.
- For MIDI channels, the pan control sends out MIDI pan messages. The result depends on how your MIDI instrument is set to respond to pan – check your documentation for details.
- **The Surround Panner is described on page 285.**

About the three pan modes (stereo audio channels only)

If you right-click (Win) or [Ctrl]-click (Mac) in the pan control field for a stereo audio channel you can select one of three pan modes:

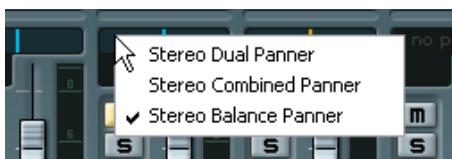

- Stereo Balance Panner controls the balance between the left and right channels.
This is the default mode.

- If Stereo Dual Panner is selected, there will be two pan controls with the upper controlling pan for the left channel, and the lower controlling pan for the right channel.

This allows you set pan independently for the left and right channels. Note that it is possible to reverse the left and right channels, i.e. the left channel can be panned to the right and vice versa. You can also “sum” two channels by setting them to the same pan position (i.e. mono) – note that this will increase the volume of the signal.



- If Stereo Combined Panner is selected, the left and right pan positions are shown as two lines with a blue/gray area between them. If you reverse the left and right channels, the area between the pan controls will be red instead of blue/gray.



Stereo Combined mode also allows you set pan independently for the left and right channels. This is done by holding down [Alt]/[Option] and dragging the corresponding pan control. When you release the [Alt]/[Option] key, the left and right pan controls are linked, and can be moved left and right like a single pan control (with their relative positions intact).

When moving combined pan controls so that the left or right pan control reaches its maximum pan value, it naturally cannot go any further. If you do continue to move further in the same direction, only the other pan control will move, thus altering the set relative pan range until both channels are panned fully to one side. If you move the pan controls in the opposite direction *without* releasing the mouse, the previously set pan range will be restored.

- The pan settings made with the Dual Panner are reflected in the Combined Panner and vice versa.

About the “Stereo Pan Law” Preference (audio channels only)

In the Project Setup dialog there is a pop-up menu named “Stereo Pan Law”, on which you can select one of three pan modes. This is all related to the fact that without power compensation, the power of the sum of the left and right side will be higher (louder) if a channel is panned center than if it's panned left or right.

To remedy this, the Stereo Pan Law setting allows you to attenuate signals panned center, by -6, -4.5 or -3dB (default). Selecting the 0dB option effectively turns off “constant-power panning”. Experiment with the modes to see which fits best in a given situation.

Audio specific procedures

This section describes the options and basic procedures regarding audio channels in the mixer.


Options for the extended audio channel strip

When using the extended channel strip view options, the upper panel can be set to show different views for each audio channel strip. You can select what to display in the extended panel individually for each channel or globally for all channels (see [page 189](#)).

The following views are possible:

- The 8 insert effect slots.
The inserts can also be found in the Inspector and the Channel Settings window, see [page 209](#).
- The 8 effect sends, with pop-ups and send level value sliders.
The sends can also be found in the Inspector and the Channel Settings window, see [page 209](#).
- You also have the option of displaying four sends at a time (the Sends 1-4 and 5-8 menu items).

These modes offer the additional benefit of displaying send levels as dB values.

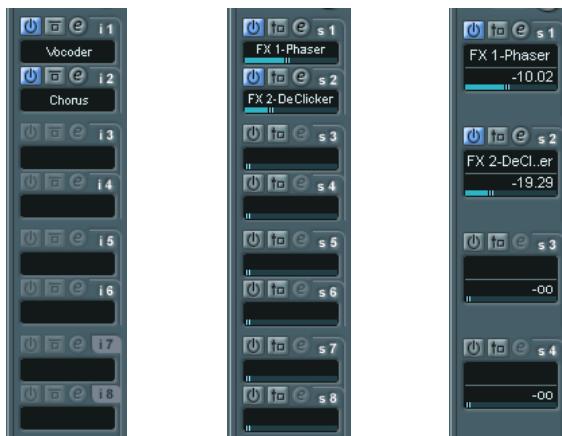

- There are no sends for Effect Return channels and Input/Output channels.

- The EQ section, either with parameter dials (“EQ +” menu item), value sliders (“EQs” item) or as numerical settings with a curve display (“EQs curve” item). These three views have exactly the same controls but different graphic layouts. The EQ section is also available in the Channel Settings window. For EQ parameter descriptions, see [page 211](#).
- The Surround Panner section (where applicable).
If the channel is routed to a surround bus you can view a compact version of the Surround Panner in the extended panel – double click to open the full Surround Panner panel.
- The “VU Meter” option shows large level meters in the extended panel.
These operate exactly like the regular meters.
- Selecting the “Empty” option will display a blank panel in the extended strip.
- You can also select the “Overview” option – this shows a graphic overview of which insert effect slots, EQ modules and effects sends are activated for the channel.
You can click the indicators to turn the corresponding slot/EQ module/send on or off.
- **If you have selected a parameter for the extended channel strip and then switch to “narrow” mode, only the channel overview is shown in the extended channel strip. When you switch back to “Wide” mode, the parameter settings are displayed again.**

Using Channel Settings

For each audio channel strip in the mixer (and in the Inspector and Track list for each audio track) there is an Edit button (“e”).

Clicking this opens the VST Audio Channel Settings window. This window contains a simplified common panel, a duplicate of the mixer channel strip (without the extended panel but with the input and output settings panel), a section with eight insert effect slots (see [page 232](#)), four EQ modules and an associated EQ curve display (see [page 211](#)) and a section with eight effect sends (see [page 246](#)). Every channel has its own channel settings (although you can view each in the same window if you like – see below).



Click the Edit button to open the Channel Settings window:



The Channel Settings window is used for the following operations:

- Apply equalization, see [page 211](#).
- Apply send effects, see [page 242](#).
- Apply insert effects, see [page 232](#).
- Copy channel settings and apply them to another channel, see [page 216](#).

-
- All channel settings are applied to both sides of a stereo channel.
-

Changing channels in the Channel Settings window

You can view any channel's settings from a single window.


If the option “Mixer Selection Follows Project” is activated in the Preferences (Editing page), this can be done “automatically”:

- Open the Channel Settings window for a track and position it so that you can see both the Project window and the Channel Settings window.

Selecting a track in the Project window automatically selects the corresponding channel in the mixer (and vice versa). If a Channel Settings window is open, this will immediately switch to show the settings for the selected channel. This allows you to have a single Channel Settings window open in a convenient position on the screen, and use this for all your EQ and channel effect settings.

You can also select a channel manually (thereby changing what is shown in the open Channel Settings window). Proceed as follows:

1. Open the Channel Settings window for any channel.
2. Open the Channel Select pop-up on the common panel.

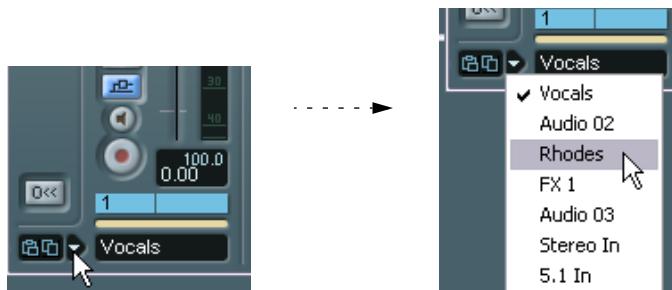

3. Select a channel from the pop-up to show the settings for that channel in the open Channel Settings window.
 - Alternatively, you can select a channel in the mixer by clicking the strip at the bottom of the channel strip (above the channel name). This selects the channel, and the Channel Settings window will be updated.
 - To open several Channel Settings windows at the same time, press [Alt]/[Option] and click the Edit buttons for the respective channels.

Making EQ settings

Each audio channel in Nuendo has a built-in parametric equalizer with up to four bands. There are several ways to view and adjust the EQs:

- By selecting one of the three EQ display modes ("EQs", "EQs +" or "EQs Curve") for the extended channel strip in the mixer.

These three modes contain the same settings but present them in different ways:

The top value slider controls the gain, the middle controls frequency and the lower sets the Q parameter for each EQ band.



The outer ring of the dial controls the frequency, while the inner controls gain. The small dial sets the Q parameter.



In this mode, EQ settings are shown as a curve. Parameters are set by clicking on the value and adjusting with the fader that appears.

From left to right, "EQs" mode (sliders), "EQs +" mode (dials) and "EQs Curve" mode (numeric values with a curve display).

- By selecting the "Equalizers" or "Equalizer Curve" tab in the Inspector.
The "Equalizers" section is similar to the "EQs" mode in the extended mixer, while the "Equalizer Curve" section shows a display in which you can "draw" an EQ curve. Setting EQ in the Inspector is only possible for track-based audio channels (not for VST Instrument channels or ReWire channels).
- By using the Channel Settings window.
This offers both parameter dials and a clickable curve display and also lets you store and recall EQ presets.

-
- **Below we describe how to set up EQ in the Channel Settings window, but the parameters are the same in the mixer and Inspector (apart from the presets and reset function).**
-

In the Channel Settings window you find the EQ section in the middle (or to the right, if you are making settings for an FX channel track). The section consists of four EQ modules with parameter dials, an EQ curve display and some additional functions at the top.



Using the parameter dials

1. Activate an EQ module by clicking its power button.

Although the modules are labeled "lo", "lo mid" and so on, they all have the same frequency range (20Hz to 20kHz). The only difference between the modules is that the "lo" and "hi" bands can act as shelving or high/low-pass filters (described below).

2. Set the desired frequency with the outer ring of the parameter dial.

This is the center frequency of the frequency range to be cut or boosted.

3. Set the amount of cut or boost with the gain control – the inner parameter dial.

The range is ± 24 dB.

4. Set the Q value with the lower dial.

This determines the width of the affected frequency range. Higher values give narrower frequency ranges.

- If you set the Q value for the "lo" EQ module to minimum, it will act as a low shelving filter.

If you set it to its maximum value, it will act as a high-pass filter.

- If you set the Q value for the "hi" EQ module to minimum, it will act as a high shelving filter.

If you set it to its maximum value, it will act as a low-pass filter.

5. If needed, you can activate and make settings for up to four modules.

Note that you can edit the values numerically as well, by clicking in a value field and entering the desired gain, frequency or Q value.

Using the curve display

When you activate EQ modules and make settings with the parameter dials you will see that your settings are automatically reflected in the curve display above. You can also make settings directly in the curve (or combine the two methods any way you like):

1. To activate an EQ module, click in the curve display.
This adds a curve point and one of the modules below are activated.
2. Make EQ settings by dragging the curve point in the display.
This allows you to adjust gain (drag up or down) and frequency (drag left or right).
3. To set the Q parameter, press [Shift] and drag the curve point up or down.
You will see the EQ curve become wider or narrower as you drag.
 - You can also restrict the editing by pressing [Ctrl]/[Command] (sets gain only) or [Alt]/[Option] (sets frequency only) while you drag the curve point.
4. To activate another EQ module, click somewhere else in the display and proceed as above.
5. To turn off an EQ module, double click its curve point or drag it outside the display.

EQ reset (Channel Settings window)

To the right above the EQ curve display in the Channel Settings window you will find a reset button. Clicking this will turn off all EQ modules and reset all EQ parameters to their default values.

EQ bypass

Whenever one or several EQ modules are activated for a channel, the EQ button will light up in green in the mixer channel strip, Inspector (Equalizer and Channel sections), Track list and Channel Settings window (top right corner of the EQ section).

Clicking the EQ button will bypass all EQ modules for the channel, allowing you to compare the sound with and without EQ. When the EQ is in Bypass mode, the EQ button is yellow.



Using EQ presets (in the Channel Settings window only)

Some useful basic presets are included with the program. You can use them as they are, or as a starting point for further “tweaking”.

- To call up a preset, pull down the presets pop-up menu above the EQ curve display and select one of the available presets.



- To store the current EQ settings as a preset, click the store button (plus sign) to the left of the presets field.
The settings are stored with the default name “Preset” and a number. To rename a preset, double click in the preset pop-up field and enter a new name.
- To remove a preset, select it and click the remove (minus sign) button.

EQ in the channel overview

If the “Channel” section is selected in the Inspector or the “Channel Overview” view mode is selected in the extended mixer, you will get an overview of which EQ modules, insert effects and effect sends are activated for the channel.

By clicking the “hi”, “hi mid”, “lo mid” or “lo” indicator, you can turn the corresponding EQ module on or off.



The channel overview in the Inspector.

Copying settings between audio channels

It is possible to copy all channel settings for an audio channel and paste them onto another channel. This applies to all audio channel types. For example, you can copy EQ settings from an audio track and apply these to a group or VST Instrument channel, if you want them to have the same sound. Proceed as follows:

1. Select the channel you want to copy settings from by clicking the narrow horizontal strip just above the channel name field (or just above the pan control). A selected channel is indicated by these two fields being highlighted.

You can also select channels with the Channel Select pop-up menu – see [page 210](#).



Selecting a channel in the channel strip (left), and in the common panel (right).

2. Click the “Copy” button in the common panel.



3. Select the channel you want to copy the settings to and click the Paste button.

The settings are applied to the selected channel.



4. To copy the same settings to several channels, repeat step 3.

The copied settings are retained in memory until you copy new channel settings, or close the project.

- ☐ **Channel settings can be copied from stereo channels and pasted to mono channels and vice versa.**

-
- Copying channel settings from a channel using a surround format to a mono or stereo channel can lead to conflicts.** For example, any Insert effects routed to surround speaker channels will be muted. Or, in other words: you can copy channel settings to any type of channel, but of course only those settings are used for which corresponding speakers are available in the target channel.

 - Input/output channels and effect return channels do not have sends, but channel settings can still be copied to/from other audio channel types.** When copying from a i/o or effect channel, any send settings in the channel you paste into are unaffected.
-

Initialize Channel and Reset Mixer

The Initialize Channel button can be found at the bottom of the Channel Settings common panel. It resets the selected channel to the default settings. Similarly, the mixer common panel holds a Reset Mixer button – when you click this you will be asked whether to reset all channels or just the selected channel.

Default settings are:

- All EQ, Insert and Send effect settings are deactivated and reset.
- Solo/Mute is deactivated.
- The fader is set to 0dB.
- Pan is set to center position.

Changing the meter characteristics

On the Mixer context menu, opened by right-clicking (Win) or [Ctrl]-clicking (Mac) anywhere on the mixer panel, there is a submenu named “VU-Meter Settings”. Here you can make settings for the preferred meter characteristics, with the following options:

- If “Hold Peaks” is activated, the highest registered peak levels are “held” and are shown as static horizontal lines in the meter.

Note that you can turn this on or off by clicking in any audio level meter in the mixer.



Hold activated

- If “Hold Forever” is activated, the peak levels will remain until meters are reset (by clicking the numerical peak display below the meter). If “Hold Forever” is off, you can specify for how long the peak levels will be held with the parameter “VU-Meter Peak’s Hold Time” in the Preferences dialog (VST page). The peak hold time can be between 500 and 30000ms.
- If “Input VU” is activated, meters will show input levels for all audio channels and input/output channels.
Note that the input VU meters are post input gain.
- If “Post-Fader VU” is activated, meters will show post-fader levels.
This is the default setting for channels in the mixer.
- If “Fast Release” is activated, the meters respond very quickly to level peaks.
If “Fast Release” is deactivated, the meters respond more like standard VU meters.

Using group channels

You can route the outputs from multiple audio channels to a group. This enables you to control the channel levels using one fader, apply the same effects and equalization to all of them etc. To create a group channel, proceed as follows:

1. Select Add Track from the Project menu and select “Group Channel” from the submenu that appears.
2. Select the desired channel configuration and click OK.
A group channel track is added to the Track list and a corresponding group channel strip is added to the mixer. By default the first group channel strip is labeled “Group 1”, but you can rename it just like any channel in the mixer.
3. Pull down the Output routing pop-up for a channel you want to route to the group channel, and select the group channel.
The output of the audio channel is now redirected to the selected group.
4. Do the same for the other channels you wish to route to the group.

Settings for group channels

The group channel strips are (almost) identical to audio channel strips in the mixer. The descriptions of the mixer features earlier in this chapter apply to group channels as well. Some things to note:

- You can route the output of a group to an output bus or to another group with a higher number.
You cannot route a group to itself. Routing is done with the Output Routing pop-up menu at the top of each channel strip.
- There are no input routing pop-ups, monitor buttons or record enable buttons for group channels.
This is because inputs are never connected directly to a group.
- Solo functionality is automatically linked for a channel routed to a group and the group channel itself.
This means that if you solo a group channel, all channels routed to the group are automatically soloed as well. Similarly, soloing a channel routed to a group will automatically solo the group channel.

One application of group channels is to use them as “effect racks” – see [page 241](#).

About output busses

As described in the Getting Started book Nuendo uses a system of input and output busses which are set up using the VST Connections dialog. This is described in the chapter “[VST Connections: Setting up input and output busses](#)”.

Output busses let you route audio from the program to the outputs on your audio hardware.

Routing audio channels to busses

To route the output of an audio channel to one of the active busses, proceed as follows:

1. Open the Mixer.
2. Make sure the input/output settings panel is visible – see [page 187](#).
3. Pull down the output routing pop-up menu at the top of the channel strip and select one of the busses.

This pop-up menu contains the output busses configured in the VST Connections window, as well as available group channels (provided that the busses and groups are compatible with the speaker configuration for the channel – see [page 20](#)).

For details on routing surround channels, see [page 280](#).

Viewing the output busses in the mixer

Output busses are shown as output channels in a separate pane to the right in the mixer. You show or hide this pane by clicking the Hide Output Channels button in the mixer’s common panel to the left:



Each output channel resembles a regular audio channel strip. Here you can do the following:

- Adjust master levels for all configured output busses using the level faders.
- Change the input gain and the input phase of the output busses.
- Add effects or EQ to the output channels (see [page 239](#)).

MIDI specific procedures

This section describes basic procedures for MIDI channels in the mixer.

Selecting what to show in the extended MIDI channel strip

When using the extended channel strip view options (see [page 187](#)), the upper panel can be set to show different views for each MIDI channel strip. You select what to display for each channel by using the View options pop-up menu at the top of each channel strip. The following views are possible:

- The MIDI insert effects.

The MIDI inserts can also be found in the Inspector and the Channel Settings window for MIDI channels. How to use MIDI insert effects is described in the chapter “MIDI realtime parameters and effects” – see [page 459](#).

- The MIDI send effects.

The sends can also be found in the Inspector and the Channel Settings window for MIDI channels. How to use MIDI send effects is described in the chapter “MIDI real-time parameters and effects” – see [page 459](#).

- The “VU Meter” option shows large level (velocity) meters in the extended panel.

- Selecting “Empty” will display a blank panel in the extended strip.

- You can also select the “Overview” option – this shows a graphic overview of which insert effect slots and effect sends are activated for the channel.

You can click the indicators to turn the corresponding slot/send on or off.

- By selecting from the View options pop-up in the common panel, you can set the view for all channels in the mixer.

Selecting EQ or Surround Panners (which apply to audio channels only) will not change the view for MIDI channels. Selecting inserts or send effects from the common panel will change the view for all channel types.

- If you have selected a parameter for the extended channel strip and then switch to “narrow” mode, only the channel overview is shown in the extended channel strip. When you switch back to “wide” mode, the parameter settings are displayed again.

Using Channel Settings

For each MIDI channel strip in the mixer (and MIDI track in the Track list or the Inspector) there is an Edit ("E") button.

Clicking this opens the MIDI Channel Settings window. This window contains a duplicate of the mixer channel strip, a section with four MIDI inserts and a section with four MIDI send effects. Every MIDI channel has its own channel settings.



The MIDI Channel Settings window.

Utilities

Link/Unlink channels

This function is used to “link” selected channels in the mixer so that any change applied to one channel will be mirrored by all channels in that group. You can link as many channels as you like, and you can also create as many groups of linked channels as you like. To link channels in the mixer, proceed as follows:

1. Press [Ctrl]/[Command] and click on the strip just above the name field for all the channels that you want to link.

There is an identical select channel field just above the pan control. Selected channels are indicated by highlighted select fields. [Shift]-clicking allows you to select a continuous range of channels.



2. Right-click (Win) or [Ctrl]-click (Mac) somewhere on the grey mixer panel.

The Mixer context menu appears.

3. Select “Link Channels” from the context menu.

- To unlink channels, select one of the linked channels and select “Unlink Channels” from the Mixer context menu.

The channels are unlinked. Note that you do not need to select all the channels that are linked, only one of them.

- **It is not possible to remove individual channels from Link status.**


To make individual settings to a linked channel, press [Alt]/[Option] when changing the setting.

What will be linked?

The following rules apply for linked channels:

- Fader levels will be “ganged”.

The relative level offset between channels will be kept if you move a linked channel fader.

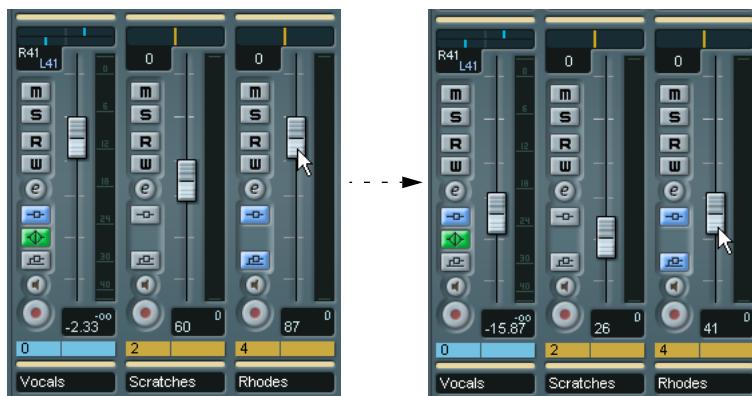

The three channels shown are linked. Pulling down one fader changes the levels for all three channels, but keeps the relative level mix.

- Any individual channel settings you have made before linking will remain until you alter the same setting for any of the linked channels.
For example, if you link three channels, and one of them was muted at the time you applied the Link Channel function, this channel will remain muted after linking. However, if you mute another channel then *all* linked channels will be muted. Thus, the individual setting for one channel is lost as soon as you change the same parameter setting for any of the linked channels.
 - Only level, mute, solo, select, monitor and record enable will be linked between channels.
Effect/EQ/pan/input and output routing settings are not linked.
 - By pressing [Alt]/[Option], you can make individual settings and changes for channels that are linked.
-
- Linked channels can also have individual automation subtracks. These are completely independent, and are not affected by the Link function.**

Saving mixer settings

- Saving/Loading mixer settings does not apply to MIDI channels in the mixer – only audio related channels (group, audio, effect return, VSTi and ReWire) are saved with this function!



It is possible to save complete mixer settings for selected or all audio channels in the mixer. These can later be loaded into any project. Channel settings are saved as mixer settings files. These have the Windows file extension ".vmx".

Right-clicking (Win) or [Ctrl]-clicking (Mac) somewhere on the mixer panel or in the Channel Settings window brings up the Mixer context menu where four Save/Load items can be found. The following options are available:

- “Save Selected Channels” will save all channel settings for the selected channels.
Input/output routings are not saved.
- “Save All Mixer Settings” saves all channel settings for all channels.

When you select any of the above options, a standard file dialog opens where you can select a name and storage location on your disk for the file.

Loading mixer settings

Load Selected Channels

To load mixer settings saved for selected channels, proceed as follows:

1. Select the same number of channels in the new project to match the number of channels you saved settings for in the previous project. For example, if you saved settings for six channels, then select six channels in the mixer.

- Mixer settings will be applied in the same order as they appear in the mixer, when saved.

Thus, if you save settings from channels 4, 6 and 8 and apply these settings to channels 1, 2 and 3, the settings saved for channel 4 would be applied to channel 1, the settings saved for channel 6 to channel 2 and so on.

2. Right-click (Win) or [Ctrl]-click (Mac) the mixer panel to open the context menu, and select “Load Selected Channels”.

A standard file dialog appears, where you can locate the saved file.

3. Select the file and click “Open”.

The channel settings and their corresponding bus routing is applied to the selected channels.

-
- If you choose to apply mixer settings to fewer channels than you saved, the order of the saved channels in the mixer applies – i.e. the saved channels that are “left over” and not applied will be the channels with the highest channel numbers (or furthest to the right in the mixer).

Load All Mixer Settings

Selecting “Load All Mixer Settings” from the context menu allows you to open a saved mixer settings file, and have the stored settings applied to all channels for which there is information included in the file. All channels, master settings, VST Instruments, sends and master effects will be affected.

- Please note that if the saved mixer settings were 24 channels, and the mixer you apply it to currently contains 16 channels, only the settings for channels 1 to 16 will be applied – this function will not automatically add channels.

About the VST Performance window



The VST Performance window is opened by selecting it from the Devices menu. It indicates the current load on the CPU and the hard disk transfer rate. It is recommended that you check this from time to time, or keep it open always. Even though you have been able to activate a number of audio channels in the project without getting any warning, you may possibly run into performance problems when adding EQ or effects.

- The upper bar graph shows the CPU (processor) load.
If the red Overload indicator lights up, you need to decrease the number of EQ modules, active effects and/or audio channels playing back simultaneously.
- The lower bar graph shows the hard disk transfer load.
If the red overload indicator lights up, the hard disk is not supplying data fast enough to the computer. You may need to reduce the number of tracks playing back by using the Disable Track function (see [page 34](#)). If this doesn't help, you need a faster hard disk. Note that the overload indicator may occasionally blink, typically when you locate during playback. This does not indicate a problem, but happens because the program needs an instant for all channels to load data for the new playback position.
- **The CPU and Disk load meters can also be shown on the Transport panel and on the Project window toolbar.**
There they are shown as two miniature vertical meters (by default at the left side of the panel/toolbar).

10

Audio effects

About this chapter

Nuendo comes with a number of effect plug-ins included. This chapter contains general details about how to assign, use and organize effect plug-ins. The effects and their parameters are described in the separate pdf document “Audio Effects and VST Instruments”.

-
- **This chapter describes audio effects, i.e. effects that are used to process audio, group, VST Instrument and ReWire channels. For info on how to use MIDI effects, see the chapter “[MIDI realtime parameters and effects](#)”.**
-

Overview

There are three ways to use audio effects in Nuendo:

- **As insert effects.**

An insert effect is inserted into the signal chain of an audio channel, which means that the whole channel signal passes through the effect. This makes inserts suitable for effects for which you don't need to mix dry and wet sound, e.g. distortion, filters or other effects that change the tonal or dynamic characteristics of the sound. You can have up to eight different insert effects per channel (and the same is true for input and output busses – for recording with effects and “master effects”, respectively).

- **As send effects.**

Each audio channel has eight effect sends, each of which can be freely routed to an effect (or to a chain of effects). Send effects are practical for two reasons: you can control the balance between the dry (direct) and wet (processed) sound individually for each channel using the sends, and several different audio channels can use the same send effect. In Nuendo, send effects are handled by means of FX channel tracks.

- **By using offline processing.**

You can apply effects directly to individual audio events – this is described on [page 351](#).

About VST plug-ins and tempo sync

Version 2.0 of the VST plug-in standard (and later) allows plug-ins to receive MIDI from the host application (in this case, Nuendo). A typical use for this feature is tempo-based effects (such as delays, auto-panning, etc.), but it is also used in other ways for certain plug-ins.

- MIDI timing information is automatically provided to any VST 2.0 plug-in that “requests it”.

You don't need to make any special settings for this.

- In many cases you set up tempo sync by specifying a base note value and a multiplier. The resulting timing interval is the base note value multiplied with the multiplier value.

For example, if you set the base note value to 1/16 (a sixteenth note) and the multiplier to 3, the resulting timing is 3/16. In the case of a delay effect, this means the interval between each delay repeat will be three sixteenth notes.

- When MIDI receive is available (or necessary) for other purposes than timing, the setting up and operation is described in the documentation for the corresponding effect.

Please refer to the pdf document “Audio Effects and VST Instruments” for details about the included effects.

About plug-in delay compensation

A plug-in effect may have some inherent delay or latency. This means that it takes a brief time for the plug-in to process the audio fed into it – as a result, the output audio will be slightly delayed. This may happen with dynamics processors featuring “look-ahead” functions, etc.

However, Nuendo provides full plug-in delay compensation throughout the entire audio path. This means that all plug-in delays are compensated for, maintaining the sync and timing of all audio channels.


Normally, you don't have to make any settings for this. However, in the “Plug-In Information” dialog, you can switch off plug-in delay compensation for individual plug-ins by unchecking the corresponding option in the “Use Delay Compensation” column (see [page 258](#)). Note that you have to re-load the plug-in for the change to take effect.

You can also *constrain* the delay compensation, which is useful to avoid latency when recording audio or playing a VST Instrument in real time. See [page 268](#).

Insert effects

Background

As the name implies, insert effects are inserted into the audio signal path – this means that the audio will be routed through the effect. You can add up to eight different insert effects independent for each audio channel (audio track, group channel track, FX channel track, VST Instrument channel or ReWire channel) or bus. The signal passes through the effects in series from the top downwards, with the following signal path:

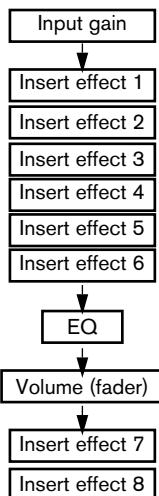

As you can see, the last two insert slots are post-EQ and post-fader. These are best suited for insert effects where you don't want the level to be changed after the effect, such as dithering (see [page 239](#)) and maximizers – both typically used as insert effects for output busses.

- **Applying insert effects on many channels uses up a lot of processing power!**

It might often be more efficient to use send effects, especially if you want to use the same type of effect on several channels. Remember that you can use the VST Performance window to keep an eye on the CPU load.

Which effect plug-ins can I use as insert effects?

Most effect plug-ins will work fine as insert effects. In general, the only restrictions are with the number of inputs and outputs:

- For a plug-in to be usable as an insert effect, it has to have at least 1 or 2 inputs and 1 or 2 outputs.

Different effects feature different amounts of inputs and outputs, but the number of inputs and outputs actually used is determined by whether you use the insert effects on a single (mono) audio channel, a stereo channel pair or a surround audio channel (multiple channels).

- For stereo audio channels, you need to use an effect with at least two inputs (stereo).

It is possible to use a mono-input effect with a stereo channel pair, but then only the one channel in the pair will be processed, which is probably not what you want. It is also possible to use an effect with more than two inputs of course, since both channels in the stereo pair will be processed even though the effect actually accommodates more.

- For mono audio channels, you can use mono- or stereo-input effects. However, since the audio channel is in mono, the output of the effect will also be in mono. For stereo output effects, the left channel will then be used.


- For multi-channel audio tracks, you can use effects with any number of inputs.

If you use an effect with only one or two inputs however, this will have the effect that only one or two channels (most often L and/or R) in a surround configuration will be affected, leaving the other channels unprocessed by the effect. See [page 236](#).

Routing an audio channel or bus through insert effects

Insert effect settings are available in the mixer (in extended mode), the Channel Settings window and the Inspector (audio tracks, group tracks and FX tracks only). The examples below show the Channel Settings window, but the procedures are similar for all three send sections:

1. Bring up the Channel Settings window, the Inserts pane in the extended mixer or the Inserts section in the Inspector.
In the Channel Settings window, the inserts are located immediately to the right of the channel strip.
2. Pull down the effect type pop-up for one of the insert slots, and select an effect.

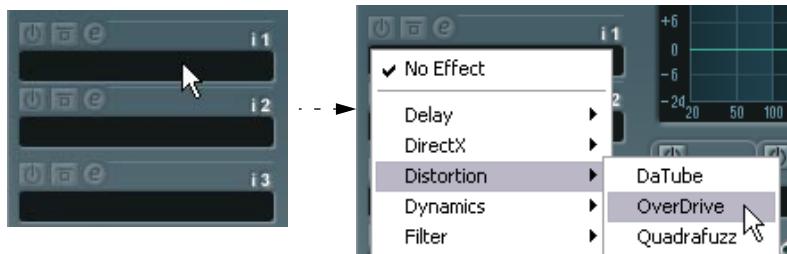

The effect is loaded and automatically activated and its control panel appears. You can hide or show the control panel for the effect by clicking the “e” button for the insert slot.

- If the effect has a Dry/Wet Mix parameter you can use this to adjust the balance between the dry signal and the effect signal.
See [page 253](#) for details about editing effects.
- When one or several insert effects are activated for a channel, the insert effects buttons light up in blue in the mixer and Track list. Click the button for a channel to bypass (disable) all its inserts.
When the inserts are bypassed, the buttons are yellow. Click the button again to enable the inserts. Note that the bypass button is also available in the Inspector and the Channel settings window for the audio track.
- To remove an effect, pull down the effect type pop-up menu and select “No Effect”.
You should do this for all effects that you don't intend to use, to minimize unnecessary CPU load.

- When you have several insert effects for a channel, you can bypass separate effects by clicking the bypass button of the respective slot. When an effect is bypassed, the button is yellow.



The “Reverb A” insert effect slot is bypassed.

Insert effects in the channel overview

If the “Channel” section is selected in the Inspector or the “Channel Overview” view mode is selected in the extended mixer, you will get an overview of which EQ modules, insert effects and effect sends are activated for the channel.

You can activate or deactivate individual insert effect slots by clicking the corresponding number (in the upper half of the overview).



The channel overview in the Inspector.

Using mono or stereo effects with a surround channel

Normally, when you apply a mono or stereo insert effect to a surround (multi channel) track, the first speaker channel(s) of the track (often L and/or R) are routed through the effect's available channels, and the other channels of the track are left unprocessed.


However, you may want to apply the effect to other speaker channels. This is done in the Channel Settings window:

1. Click in the small window to the left above the inserts section to open up the Display Modes pop-up menu.




2. Select "Routing" from the menu.

The inserts section changes appearance, to display a row of small signal diagrams.

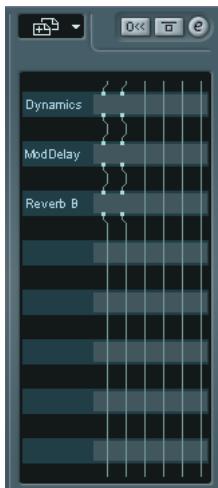


- Double click on the small signal diagram for the effect to open up an editor window.

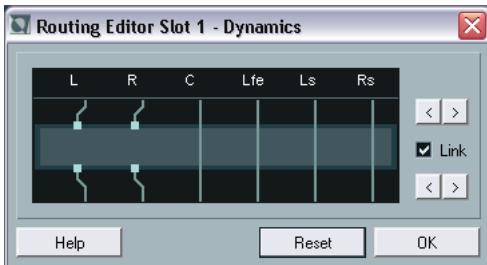

The columns in the diagram represent the channels in the current surround configuration, with signals passing from top to bottom. The grey field in the middle represents the actual effect plug-in.

- The squares above the effect represent inputs to the effect plug-in.
- The squares below the effect represent outputs from the effect plug-in.
- A line that passes through the effect (with no square input/output indicators) represent a bypass connection – the audio on that speaker channel passes the effect without being processed.
- A “broken” line indicates a broken connection – the audio on that speaker channel will not pass on to the output at all.

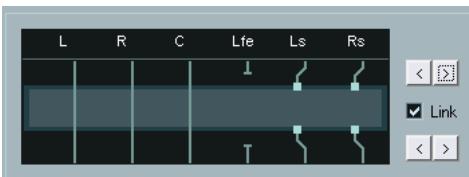

Here, the effect will process the Ls and Rs channels. The L, R and C channels will pass through unaffected, while the Lfe connection is broken.

Operations

You can move connections to the effect inputs and outputs sideways to route the audio to/from other inputs/outputs than the standard configuration. To do this, you click the arrow buttons to the right.

- The upper two arrows move the input connections, and the lower two arrows move the output connections.
If the “Link” checkbox is activated the input and output connections will be moved at the same time. This is the mode to use when you simply want to process other channels than the default, without any cross-connections.
- If you move inputs or outputs independently of each other, this means you create a “cross-connection”.



The audio on the Ls-Rs channels is processed in the plug-in and output on the L-R channels. Since the L-R channels are bypassed, this means the final L-R output will contain both the original L-R signals and the processed Ls-Rs signals.

- If a channel is bypassed (a straight line is shown through the plug-in) you can [Ctrl]/[Command]-click the line to break the connection. [Ctrl]/[Command]-click again to replace the broken connection with a bypass.
- Clicking Reset gets you back to the original standard connection.
- **Changes you make in this window are audible immediately.**

About adding insert effects to busses

As already stated, all input and output busses have eight insert slots, just like regular audio channels. The procedures for adding insert effects are the same (except you cannot use the Inspector here).

- Adding insert effects to an input bus allows you to record with effects. The effects will become a permanent part of the recorded audio file (see [page 60](#)).
- Insert effects added to an output bus will affect all audio routed to that bus, like a “master insert effect”. Typically you would add compressors, limiters, EQ or other plug-ins to tailor the dynamics and sound of the final mix. A special case is dithering, as described below.

Dithering

Dithering is a method for controlling the noise produced by quantization errors in digital recordings. The theory behind this is that during low level passages, only a few bits are used to represent the signal, which leads to quantization errors and hence distortion.

For example, when “truncating bits”, as a result of moving from 24- to 16-bit resolution, quantization errors are added to an otherwise immaculate recording. By adding a special kind of noise at an extremely low level, the effect of these errors is minimized. The added noise could be perceived as a very low-level hiss under exacting listening conditions. However, this is hardly noticeable and much preferred to the distortion that otherwise occurs.

When should I use dithering?

- Consider dithering when you mix down to a lower resolution, either in real-time (playback) or with the Export Audio Mixdown function. A typical example is when you mix down a project to a 16-bit stereo audio file for audio CD burning.

What is a “lower resolution” then? Well, Nuendo uses 32-bit float resolution internally, which means that all integer resolutions (16-bit, 24-bit, etc.) are lower. The negative effects of truncation (no dithering) are probably most noticeable in 8-bit, 16-bit and 20-bit format; whether to dither when mixing down to 24 bits is perhaps a matter of taste.

Applying dithering

1. Click the “e” button to bring up the Output Settings window for the output bus, or display its Inserts section in the extended mixer pane, as described above.
2. Pull down the Inserts pop-up menu in slot 7 or 8.
- **These two last Insert effect slots are post-fader, which is crucial for a dithering plug-in.**

The reason is that any master gain change applied after dithering would bring the signal back to the internal 32 bit float domain, rendering the dithering settings useless.

3. Select a dithering plug-in from the pop-up menu.

Dithering plug-ins included with Nuendo are:

Plug-in	Description
UV22HR	UV22HR offers very high-quality dithering with support for multiple resolutions (8, 16, 20 or 24 bits).
NuendoDither	NuendoDither is a surround-compatible plug-in capable of dithering eight channels at the same time. If you are applying dithering to a surround bus, this is the recommended dithering plug-in to use.

For a description of the included dithering plug-ins and their parameters, please see the separate PDF document “Audio Effects and VST Instruments”. If you have installed another dithering plug-in that you prefer, you can of course select this instead.

4. Make sure the dithering plug-in is set to dither to the correct resolution. This would be the resolution of your audio hardware (on playback) or the desired resolution for the mixdown file you want to create (as set in the Export Audio Mixdown dialog, see [page 597](#)).
5. Use the other parameters in the control panel to set up the dithering to your liking.

Using group channels for insert effects

Like all other channels, group channels can have up to eight insert effects. This is useful if you have several audio tracks that you want to process through the same effect (e.g. different vocal tracks that all should be processed by the same compressor). Another special use for group channels and effects is the following:

If you have a mono audio track and want to process this through a stereo insert effect (e.g. a stereo chorus or an auto panner device), you cannot just insert the effect as usual. This is because the audio track is in mono – the output of the insert effect will then be in mono as well, and the stereo information from the effect will be lost.

One solution would be to route a send from the mono track to a stereo fx channel track, set the send to pre fader mode and lower the fader completely for the mono audio track. However, this makes mixing the track cumbersome, since you cannot use the fader. Here's another solution:

1. Create a group channel track in stereo and route it to the desired output bus.
2. Add the desired effect to the group channel as an insert effect.
3. Route the mono audio track to the group channel.

Now the signal from the mono audio track is sent directly to the group, where it passes through the insert effect, in stereo.

Send effects

Background

Send effects are handled through FX channel tracks. These are special tracks that each can contain up to eight insert effects. The signal path is as follows:


- By routing an effect send from an audio track to an FX channel track, the audio is sent to the FX channel and through its insert effect(s). Each audio channel has eight sends, which can be routed to different FX channels. You control the amount of signal sent to the FX channel by adjusting the effect send level.
- If you have added several effects to the FX channel, the signal passes through the effects in series, from the top (the first slot) downward. This allows for “custom” send effect configurations – you could e.g. have a chorus followed by a reverb followed by an EQ and so on.
- The FX channel track has its own channel strip in the mixer, the effect return channel. Here you can adjust the effect return level and balance, add EQ and route the effect return to any output bus.
- Each FX channel track has an automation subtrack, for automating various effect parameters.

See [page 307](#) for information.

Setting up send effects

Adding an FX channel track

1. Pull down the Project menu and select “FX Channel” from the “Add Track” submenu.
A dialog appears.

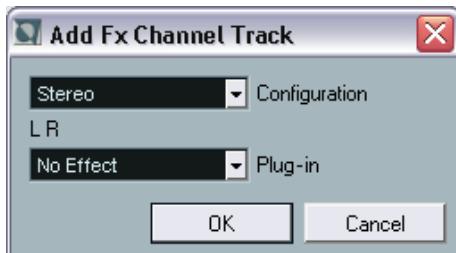

2. Select a channel configuration for the FX channel track.
Normally, stereo is a good choice since most effect plug-ins have stereo outputs.
3. Select an effect for the FX channel track.
This is not strictly necessary at this point – you can leave the Plug-in pop-up menu set to “No Effect” and add effects to the FX channel later if you like.
4. Click OK.
An FX channel track is added to the Track list, and the selected effect, if any, is loaded into the first insert effect slot for the FX channel (in that case, the lit Inserts tab for the FX channel track in the Inspector indicates that an effect has been assigned and automatically activated).

- All FX channel tracks you create will appear in a kind of “folder” in the Track list.

This makes it easy to manage and keep track of all your FX channel tracks, and also allows you to save screen space by folding the FX Channel folder.



FX channel tracks are automatically named “FX 1”, “FX 2” etc., but you can rename them if you wish. Just double click the name of an FX channel track in either the Track list or the Inspector and type in a new name.

Adding and setting up effects

As mentioned above, you can add a single insert effect when you create the FX channel track if you like. To add and set up effects after the FX channel track is created, you can either use the Inspector for the track (click the Inserts tab) or the FX Settings window:

1. Click the Edit (“e”) button for the FX channel track (in the Track list, mixer or Inspector).

The FX Settings window appears – this is like a regular Channel Settings window but without the send panel.



In the middle of the window is the Inserts section with eight effect slots.

2. Make sure the FX channel is routed to the correct output bus.
This is done with the output routing pop-up menu at the top of the fader section (also available in the mixer and Inspector).
3. To add an insert effect in an empty slot (or replace the current effect in a slot), click on the slot and select an effect from the pop-up menu.
This works just like when selecting insert effects for a regular audio channel.
4. When you add an effect, its control panel will automatically appear.
Typically you should set the Wet/Dry Mix control to all “wet”.
This is because you control the balance between wet and dry signal with the effect sends. For more about making settings in the effect control panels, see [page 253](#).
 - If you like, you can add up to eight effects for the FX channel.
Note that the signal will pass through all the effects in series. It is not possible to adjust the effect send- and return levels separately for each effect – this is done for the FX channel as a whole. If what you want is several separate send effects (where you can control their send and return levels independently) you should instead add more FX channel tracks – one for each effect.

- To remove an insert effect from a slot, click the slot and select “No Effect” from the pop-up menu.
You should do this for all effects that you don’t intend to use, to minimize unnecessary CPU load.
- You can also bypass individual effects (or all effects) by clicking the corresponding Bypass Inserts button(s) for the FX channel track.
See [page 234](#).
- You can also adjust level, pan and EQ for the effect return in this window.
As always, this can also be done in the mixer or in the Inspector.
- **Remember that effects rely heavily on the CPU power in your computer.**
The more activated effect units, the more computer power will be used for effects.

Setting up the sends

The next step is to set up and route a send for an audio channel to the FX channel. This can be done in the mixer (in the extended panel), in the Channel Settings window or in the Inspector for the audio track. The example below shows the Channel Settings window, but the procedure is similar for all three sections:

1. Click the “e” button for an audio channel to bring up its Channel Settings window.
In the mixer you would select one of the Sends modes for the extended mixer panel; in the Inspector you would click the Sends tab.

In the channel settings window, the send section is located to the far right. Each of the eight sends has the following controls and options:

- A send on/off switch
- A send level slider
- A pre/post fader switch
- An Edit button

2. Pull down the routing pop-up menu for a send by clicking in the empty slot, and select the desired routing destination.



- If the first item on this menu, "No Bus" is selected, the send isn't routed anywhere.
 - Items called "FX 1", "FX 2" etc. correspond to existing FX tracks. If you have renamed an FX track (see [page 243](#)) that name will appear on this menu instead of the default.
 - The menu also allows for routing a send directly to output busses, separate output bus channels or Group channels.
Routing a send to an output bus allows you to use external effect devices for example.
3. In this case, select an FX channel track from the pop-up menu.
Now the send is routed to the FX channel.
 4. Click the power button for the effect send so that it lights up in blue.
This activates the send.



5. Click and drag the send level slider to a moderate value.



The send level determines how much of the signal from the audio channel is routed to the FX channel via the send.



Setting the Send level.

6. If you want the signal to be sent to the FX channel before the audio channel's volume fader in the mixer, click on the Pre Fader button for the send so that it lights up.

Normally you want the effect send to be proportional to the channel volume (post fader send). The picture below shows where the sends are "tapped" from the signal in pre and post fader mode:

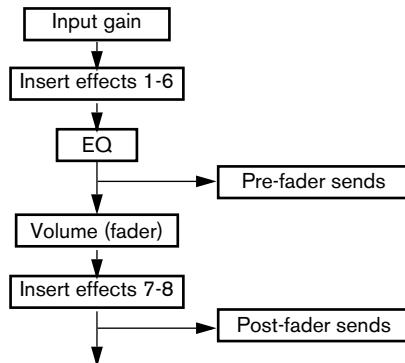

A send set to pre fader mode.

- You can choose whether a send in pre fader mode should be affected by the channel's Mute button or not.

This is done with the option “Mute Pre-Send when Mute” in the Preferences (VST page).

- When one or several sends are activated for a channel, the Send Effects buttons light up in blue in the mixer and the Track list. Click the button for a channel to bypass (disable) all its effect sends.

When the sends are bypassed, the button is yellow. Click the button again to enable the sends. Note that this button is also available in the Inspector and the Channel settings window.



Click this button to bypass the sends.

- You can also bypass individual sends in the channel overview. See [page 235](#).
- Alternatively, in the same manner you can bypass the send effects by clicking the “Bypass Inserts” button for the FX channel. The difference is that this bypasses the actual *send effects* which may be used by several different channels. Bypassing a *send* affects that send and that channel only.

Setting pan for the sends

Each send in the Channel Settings window for an audio channel features a pan control that lets you position the effect sound from an FX channel in the sound field – stereo or surround. There are several uses for this:

- If you route a send from a mono channel to a stereo FX channel track, you can position the send signal at center pan in the stereo FX channel (or anywhere you like).

- If you route a send from a stereo channel to a mono FX channel track, the pan control works as a crossfader, determining the balance between the stereo sides when the stereo send signal is mixed to mono.
- If you route a send from a mono or stereo channel to a FX channel track in surround format, you can use the surround panner to position the send signal in the surround image.

You set up send panning the following way:

1. Open the Channel settings window for the audio channel.
2. Pull down the Display Modes pop-up menu, located above the sends to the right.



3. On the menu, select “Routing”

Where applicable, small pan controls appear above effect sends routed to FX channels.



4. Click and drag the handle to pan the send.

As usual, you can reset the pan control to the center position by pressing [Ctrl]/[Command] and clicking on the pan control slider.

- If the FX channel is configured in a surround format, the pan control will be a miniature surround panner, similar to the one found in the mixer. You can click and drag the “ball” in this figure to position the send in the surround field, or double click the figure to bring up the surround panner. See [page 285](#).
- **If both the send (the audio channel) and the FX channel is in mono, the pan control is not available.**

Setting effect levels

After you have set up the sends as described in the previous sections, the following is now possible:

- You can use the send level slider in the Channel Settings, Inspector, or the extended part of the mixer to set the send level.

By adjusting the send level you control the amount of signal sent from the audio channel to the FX channel.



Setting the effect send level.

- In the mixer, you can use the level fader for the FX channel to set the effect return level.

By adjusting the return level you control the amount of the signal sent from the FX channel to the output bus.



Setting the effect return level.

FX channels and the Solo Defeat function

When mixing, you might sometimes want to solo specific audio channels, and listen only to these while other channels are muted. However, this will mute all FX channels as well. If the soloed audio channels have sends routed to FX channels, this means you won't hear the send effects for the channels.

To remedy this, you can use the Solo Defeat function for the FX channel:

1. First press [Alt]/[Option] and click on the Solo button for the FX channel.

This activates the Solo Defeat function for the FX channel. In this mode, the FX channel will not be muted if you solo another channel in the mixer.

2. You can now solo any of the audio channels without having the effect return (the FX channel) muted.
3. To turn off the Solo Defeat function for the FX channel, [Alt]/[Option]-click the Solo button for the FX channel again.

Making settings for the effects

Selecting effect presets

Most VST effect plug-ins come with a number of useful presets for instant selection. You can select presets in the control panel for the effect, but they are also available for selection from the Channel Settings window:

1. Open the Channel Settings for the channel with the insert effects. This means that to select presets for send effects, you should open the FX Settings window for the FX channel track.
2. Pull down the Display Modes pop-up menu above the insert slots and select "Preset".

Now the insert slots show the currently selected presets.



3. Use the pop-up menu (the arrow to the right of the preset name) to select another preset.



Editing effects

All inserts and sends have an Edit (“e”) button. Clicking this opens the selected effect’s control panel in which you can make parameter settings.

The contents, design and layout of the control panel depends on the selected effect. However, all effect control panels have a power button, a Bypass button, Read/Write automation buttons (for automating effect parameter changes – see [page 307](#)), a preset selection pop-up menu and a file pop-up menu for saving or loading programs. In Nuendo for Mac OS X these are located at the bottom of the control panel, whereas they are at the top of the control panel in Nuendo under Windows.



The Rotary effect control panel.

- Please note that all effects can be edited using a simplified control panel (horizontal sliders only, no graphics) if you prefer this. To edit effects using this “basic” control panel instead, press [Ctrl]/[Command]+[Shift] and click on the Edit button for the effect send or slot.

Making settings

Effect control panels may have any combination of knobs, sliders, buttons and graphic curves.

- For specifics about the included effects and their parameters, please refer to the separate pdf document “**Audio Effects and VST Instruments**”.

Naming effects

If you edit the parameters for an effect, these settings are saved automatically in the project. If you want to name the current settings, the following points apply:

- The basis for the current settings may have been a preset effect program, in which case there is a name in the preset field.
- The basis for the current settings may have been a default setting program location in which case “Default” is displayed in the preset field.

In both cases, if you have changed any effect parameter settings, these are already saved! To name the current settings, click the Name field, type in a new name and press [Return]. The new name replaces the previous name on the program pop-up menu.

Saving effects

You can save your edited effects for further use (e.g. in other projects) by using the file pop-up menu to the right of the name field.

1. Pull down the file pop-up menu.
 - If you want to save the current program only, select “Save Effect”. Effect programs have the Windows file extension “fxp”.
 - If you want to save all programs for the effect, select “Save Bank”. Effect banks have the Windows file extension “fbx”.
2. In the file dialog that appears, select a name and location for the file and click Save.
It might be a good idea to prepare a special folder for your effects.

Loading effects

1. Pull down the file pop-up menu.
2. Select “Load Effect” or “Load Bank”.
3. In the file dialog that opens, locate the file and click Open.
If you loaded a Bank, it will replace the current set of all effect programs. If you loaded a single effect, it will replace the currently selected effect program only.

Automating effect parameters

Effects parameters can be automated – see the chapter “[Automation](#)”.

Installing and managing effect plug-ins

There is a wide range of additional effect plug-ins available in the two formats supported by Nuendo (VST and DirectX). The two formats are handled differently when it comes to installation and organizing:

VST plug-ins

Mac OS X

- If you acquire additional VST plug-ins, make sure they are created specifically for Mac OS X! Plug-ins in Mac OS 9.X format cannot be used.
-

There is a large number of VST plug-ins available for purchase or download. To install a VST plug-in under Mac OS X, quit Nuendo and drag the plug-in file to one of the following folders:

- /Library/Audio/Plug-Ins/VST/
This is only possible if you are the system administrator. Plug-ins installed in this folder will be available to all users, for all programs that support them.
- Users/Username/Library/Audio/Plug-Ins/VST/
“Username” above is the name you use to log on to the computer (the easiest way to open this folder is to go to your “Home” folder and use the path /Library/Audio/Plug-Ins/VST/ from there). Plug-ins installed in this folder are only available to you.

When you launch Nuendo again, the new effects will appear on the effect pop-up menus.

- An effect plug-in may also come with its own installation application, in which case you should use this.
Generally, always read the documentation or readme files before installing new plug-ins.

Windows

Under Windows, VST plug-ins are usually installed simply by dragging the files (with the extension “.dll”) into the Vstplugins folder in the Nuendo application folder, or into the Shared VST Plug-in folder – see below. When you launch Nuendo again, the new effects will appear on the Effect pop-up menus.

- If the effect plug-in comes with its own installation application, you should use this.
Generally, always read the documentation or readme files before installing new plug-ins.

Organizing VST plug-ins

If you have a large number of VST plug-ins, having them all on a single pop-up menu in the program may become unmanageable. For this reason, the plug-ins installed with Nuendo are placed in appropriate subfolders according to the effect type.

- Under Windows, you can rearrange this by moving, adding or renaming subfolders within the Vstplugins folder if you like.

When you launch the program and pull down an Effects pop-up menu, the subfolders will be represented by hierarchical submenus, each listing the plug-ins in the corresponding subfolder.

- Under Mac OS X, you cannot change the hierachic arrangement of the “built-in” VST plug-ins.

You can however arrange any additional plug-ins you have installed (in the /Library/ Audio/Plug-Ins/VST/ folders, see above) by placing them in subfolders. In the program, the subfolders will be represented by hierarchical submenus, each listing the plug-ins in the corresponding subfolder.

About shared VST plug-ins (Windows only)

While Nuendo’s own plug-ins reside in the Vstplugins folder within the Nuendo program folder, the program can also access plug-ins in an additional location, called the shared VST plug-ins folder. This lets you use plug-ins installed by other VST compatible applications, etc. You can change what folder is considered the “shared” Vstplugins folder at any time in the Plug-in Information window, see [page 258](#).

About the “Nuendo 1.x Plug-ins” subfolder

When installing Nuendo, you were asked whether you wanted to install the effects from previous program versions of Nuendo. If you chose to do so, the Nuendo 1.x effects will appear on a submenu to the effect pop-up menus.

The foremost reason for installing these earlier plug-ins is backwards compatibility, allowing you to import old Nuendo projects and get the correct effect settings.

DirectX plug-ins (Windows only)


To be able to use DirectX plug-ins, you must have Microsoft DirectX installed on your computer (Version 8.1 – or later – recommended and included on the Nuendo CD).

DirectX plug-ins should *not* be placed in the Vstplugins folder, as these are installed under the operating system rather than for Nuendo exclusively. Rather, you should follow the installation instructions included with the plug-ins. See also [page 261](#).

- On the effect menus, all DirectX plug-ins are listed on the DirectX submenu.

Selecting, activating and editing them is done as with VST effects

The Plug-in Information window

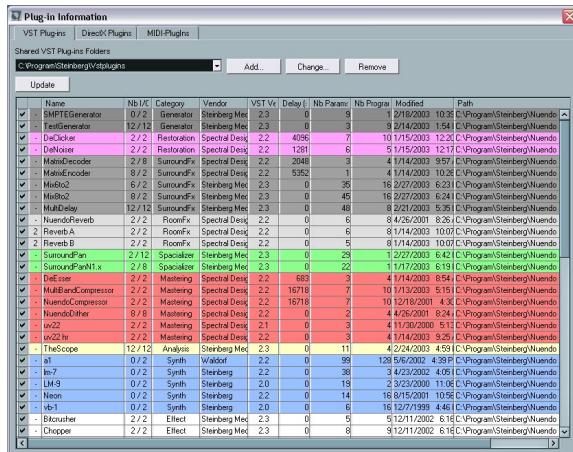

On the Devices menu, you will find an item called “Plug-in Information”. Selecting this opens a dialog listing all the available VST and DirectX compatible plug-ins in your system (including VST Instruments), along with all MIDI plug-ins (see [page 464](#)).

Managing and selecting VST plug-ins

To see which VST plug-ins are available in your system, click the “VST Plug-ins” tab at the top of the window. The window now displays all plug-ins in the Nuendo and the shared Vstplugins folder.

- To enable a plug-in (make it available for selection), click in the left column. Only the currently enabled plug-ins (shown with a check sign in the left column) will appear on the effect menus.
- The second column indicates how many instances of the plug-in are currently used in Nuendo.

Clicking in this column for a plug-in which is already in use produces a pop-up showing exactly where each use occurs.

- **A plug-in may be in use even if it isn't enabled in the left column.**

You might for example have opened a project containing effects that currently are disabled on the menu. The left column purely determines whether or not the plug-in will be visible on the effect menus.

- All columns can be resized by using the divider in the column header.

The other columns show the following information about each plug-in:

Column	Description
Name	The name of the plug-in.
Nb I/O	This column shows the number of inputs and outputs for each plug-in.
Category	This indicates the category of each plug-in (such as VST Instruments, Surround Effects, etc.).
Vendor	The manufacturer of the plug-in.
VST Version	Shows with which version of the VST protocol a plug-in is compatible.
Delay (sample)	This shows the delay (in samples) that will be introduced if the effect is used as an Insert. This is automatically compensated for by Nuendo.
Use Delay Compensation	This option (checked by default) means that plug-in delay compensation is used for this plug-in (see page 231).
Nb Params	The number of parameters for the plug-in.
Nb Programs	The number of programs for the plug-in.
Old Host Behaviour	Check this column for a specific plug-in if you want it to be processed like it was by previous versions of Nuendo, to avoid problems such as feedback-like sounds. Note that you have to reload the plug-in for the change to take effect.

Column	Description
Modified	The last modification date of the plug-in file.
Path	The path and name of the folder in which the plug-in file is located.

Update Button


Pressing this button will make Nuendo re-scan the designated Vstplugins folders for updated information about the plug-ins.

- If you press [Ctrl]/[Command] and click this button, a text file with the plug-in information is generated.

The file will be saved in the folder \Documents and Settings\Administrator\Local Settings\Temp under Windows. Under MacOS X, you will be asked to specify a folder where the file should be saved.

This document could be useful if you need to contact Steinberg Technical Support – or you might want to use it just as a handy reference of the installed effects.

Changing the Shared Plug-ins Folder (Windows only)

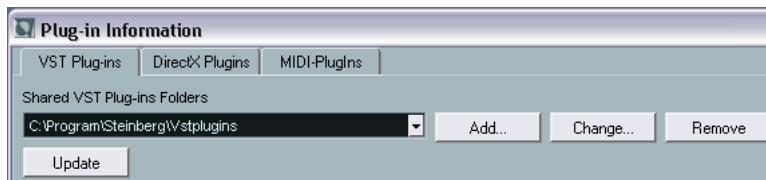

If you like, you can change what folder is to be the “shared” Vstplugins folder. For example, if you have Steinberg’s Cubase VST 5.1 installed on your computer, you can get access to the Cubase VST 5.1-specific plug-ins in Nuendo by switching to the Vstplugins folder within the Cubase VST 5.1 folder.

The currently selected Shared Folder is displayed in the text field at the top of the window. Clicking the “Change...” button opens a file dialog where you can browse to another Vstplugins folder on your hard drive. Clicking OK selects the new folder as the shared VST plug-ins folder.

- After selecting a new shared plug-ins folder, you will first be prompted to confirm your choice, and you will then need to restart Nuendo for the effects in the new folder to become available.

- Similarly, you can also add additional Shared Plug-ins folders by clicking the “Add” button and browsing to another Vstplugins folder on your hard drive.

If you have several folders assigned as Shared Plug-ins Folders, you can at any time use the text field pop-up menu to decide which of the assigned folders should be the designated active one.



- To remove a Shared Plug-ins Folder, select it and click the “Remove” button.

Managing and selecting DirectX plug-ins (Windows only)

To see which DirectX plug-ins are available in your system, click the “DirectX Plug-ins” tab at the top of the window.

- To enable a plug-in (make it available for selection), click in the left-most column.
Only the currently enabled plug-ins (shown with a check sign in the left column) will appear on the Effect menus.

The idea here is that there could be a variety of DirectX plug-ins in your system, many of which are not intended for musical audio processing. Disabling these helps you keep the effect menus in Nuendo more manageable.

- The second column indicates how many instances of the plug-in are currently used in Nuendo.
Clicking in this column for a plug-in which is already in use produces a pop-up showing exactly where each use occurs.

-
- Please note that a plug-in may be in use even if it isn't enabled in the left column. You might for example have opened a project containing effects that currently are disabled on the menu. The left column purely determines whether or not the plug-in will be visible on the effect menus.
-

11

VST Instruments

Introduction

VST Instruments are software synthesizers (or other sound sources) that are contained within Nuendo. They are played internally via MIDI, and their audio outputs appear on separate channels in the mixer, allowing you to add effects or EQ, just as with audio tracks.

Some VST Instruments are included with Nuendo, others can be purchased separately from Steinberg and other manufacturers. The following VST Instruments are included and installed with Nuendo:

- A1 – a software synthesizer powered by Waldorf.
- VB-1 – a virtual bass instrument built on real-time physical modelling principles.
- LM-7 – a 24 bit drum machine.
- **This chapter describes the general procedures for setting up and using VST Instruments.**

For descriptions of the included VST Instruments and their parameters, see the separate pdf document "Audio Effects and VST Instruments".

Activating and using VST Instruments

1. Pull down the Devices menu and select VST Instruments.
The VST Instruments panel appears with 64 slots.



2. Pull down the pop-up menu for an empty slot in the panel and select the desired instrument.


The instrument is loaded and activated, and its control panel is automatically opened.

- If you look in the Project window, you will find that a special “folder” for the chosen instrument has been added, within a “VST Instruments” folder (where all your VST Instruments will appear).
The separate folder for the added instrument contains two or more automation tracks: one for automating the plug-in parameters and one for each mixer channel used by the VST Instrument. For example, if you add a VST Instrument with four separate outputs (four separate mixer channels), the folder will contain five automation tracks. To keep the screen less cluttered, you may want to close the folder for the VST Instrument until you need to view or edit any of the automation tracks.

For more about automation, see [page 295](#).

3. Select an unused MIDI track in the Project window.
4. Pull down the output pop-up menu for the MIDI track in the Track list or in the Inspector.

The pop-up menu will now contain an additional item, with the name of the activated VST Instrument.

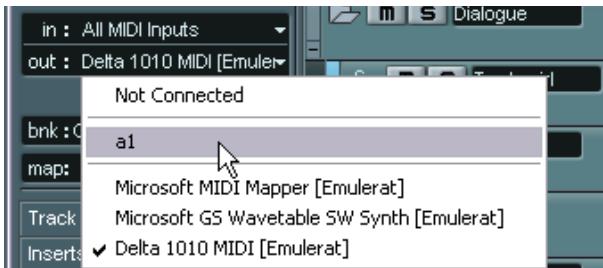

5. Select the VST Instrument on the MIDI output pop-up menu.
The MIDI output from the track is now routed to the selected instrument.
6. Depending on the selected instrument, you may also need to select a MIDI channel for the track.
For example, a multi-timbral VST Instrument can play back different sounds on different MIDI channels – check the instrument's documentation for MIDI implementation details.
7. Make sure the option “MIDI Thru Active” is activated in the Preferences dialog (MIDI page).
8. Click the Monitor button for the MIDI track (in the Track list, Inspector or mixer).
When this is activated (or when the track is record enabled, see [page 64](#)) incoming MIDI is passed on to the selected MIDI output (in this case the VST Instrument).
9. Open the mixer.
You will find an additional channel strip for the instrument’s audio outputs. VST Instrument channel strips have the same features and functionality as group channel strips, with the addition of an Edit button at the bottom of the strip for opening the VST Instrument control panel.
10. Use the output routing pop-up at the top of the channel strip to route the instrument audio to the desired output or group.
11. Play the instrument from your MIDI keyboard.
You can use the mixer settings to adjust the sound, add EQ or effects, etc. – just as with regular audio channels. Of course, you can also record or manually create MIDI parts that play back sounds from the VST Instrument.

-
- You can have up to 64 VST Instruments activated at the same time, different models or several instances of the same instrument. However, software synthesizers can consume quite a lot of CPU power – keep an eye on the VST Performance window to avoid running out of processor power.
-

About latency

Depending on your audio hardware and its ASIO driver, the latency (the time it takes for the Instrument to produce a sound when you press a key on your MIDI controller) may simply be too high to allow comfortable real-time VST Instrument playback from a keyboard.

If this is the case, a workaround is to play and record your parts with another MIDI Sound Source selected, and then switch to the VST Instrument for playback.

- You can check the latency for your audio hardware in the Device Setup dialog (**VST Multitrack page**).

The input and output latency values are shown under the ASIO Driver pop-up menu. For live VST Instruments playing, these values should ideally be a few milliseconds (although the limit for “comfortable” live playing is a matter of personal taste).

Constrain Delay Compensation

Nuendo features full delay compensation throughout the entire audio path. This means that any delay inherent in the VST plug-ins you use will automatically be compensated for during playback, so that all channels are kept in perfect sync (see [page 231](#)).

However, when you play a VST Instrument in real time or record live audio (with monitoring through Nuendo activated), this delay compensation may sometimes result in added latency. To avoid this, you can click the Constrain Delay Compensation button on the Project window toolbar. This function tries to minimize the latency effects of the delay compensation, while maintaining the sound of the mix as far as possible.



- In the Preferences dialog (VST page) you will find a setting called Delay Compensation Threshold. Only plug-ins with a delay higher than this setting will be affected by the Constrain Delay Compensation function.
- VST plug-ins (with higher delay than the threshold value) which are activated for VST Instrument channels, audio track channels that are record enabled, group channels and output channels will be turned off when you activate Constrain Delay Compensation.
- VST plug-ins activated for FX channels are not turned off but their delay is disregarded by the program (delay compensation is turned off).

After recording or using a VST Instrument with Constrain Delay Compensation, you should turn off the function to restore full delay compensation.

Selecting patches and making settings

- To select a patch for a VST Instrument, use its patch pop-up menu in the VST Instruments window.

The available patches depends on the VST Instrument. Not all VST Instruments come with pre-made patches.



- To access the parameters for the VST Instrument, click the Edit button in the VST Instruments window or in its channel strip (at the bottom of the fader strip) in the mixer.

This opens a "control panel" for the VST Instrument.

- For descriptions of the included VST Instruments and their parameters, see the separate pdf document "Audio Effects and VST Instruments".

Selecting patches from the Project window

When a VST Instrument is selected as MIDI output for a track, you can also select patches by name, using the program pop-up menu in the Track list or Inspector. Although this is set up automatically and transparently, there are a couple of things to note:

- If the VST Instrument supports the VST 2.1 standard (or later), selecting a patch will cause Nuendo to send MIDI Program Change and Bank Select messages to the VST Instrument, just as with "real" physical MIDI instruments.

A consequence of this is that you can enter Program Change events in MIDI parts anywhere on the track, having the VST Instrument change patch at the desired locations ("automating" the patch selection).

- If the VST Instrument supports the original VST 2.0 standard only, only limited support of patch selection is offered.

In this case, selecting a patch will actually ask the VST Instrument to change "Plug-in Program", which is *not* the same as selecting a "Patch" by sending MIDI Program Change and Bank Select messages.

Automating a VST Instrument

- Automation of the VST Instrument channel settings is done in the same way as automating regular channels.
- Automation of the specific parameters for a VST Instrument is done in the same way as automating VST effect parameters.

See [page 294](#).

The Instrument Freeze function

Like all plug-ins, VST Instruments can sometimes require a lot of processor power. If you are using a moderately powerful computer or if you are using a large number of VST Instruments, you may come to a point where your computer cannot handle all VST Instruments playing back in real time (the CPU overload indicator in the VST Performance window lights up, you get crackling sounds, etc.).

Enter the Instrument Freeze function! This is how it works:

- When you freeze a VST Instrument, the program renders an audio file of its output (taking into account all unmuted MIDI parts routed to that VST Instrument). This file is placed in the “Freeze” folder within the Project folder.
- All MIDI tracks routed to the VST Instrument are muted and locked (the controls for these tracks will appear “greyed-out” in the Track list and Inspector).
- When you play back, the rendered audio file is played back from an “invisible” audio track, routed to the VST Instrument’s mixer channel. Thus, any effects, EQ or mixing automation will still be applied.

The result of all this is that you get exactly the same sound as before, but the computer processor doesn’t have to calculate the sound of the VST Instrument in real time.

- If you need to edit the MIDI parts routed to the VST Instrument or adjust the settings on the instrument itself, you need to unfreeze the instrument first. This removes the rendered file and restores the MIDI tracks and VST Instrument. Once you have made the necessary adjustments you can freeze the instrument again.

Performing the Freeze

1. Set up the Project so that the VST Instrument plays back the way you want it.

This includes editing the MIDI parts routed to the VST Instrument and making parameter settings for the VST Instrument itself. If you have automated parameter changes for the VST instrument, make sure the Read (R) button is activated.

2. Open the Project Setup dialog and make sure the Length setting matches the actual project length.

The rendered freeze file will span the whole project length. Although empty (silent) sections will not affect the size of the freeze file, the Instrument Freeze operation will take longer if you have an unnecessarily high Length setting.

3. Open the VST Instruments window from the Devices menu.



4. Click the Freeze button for the VST Instrument (the button to the left of the VST Instrument slot).

A progress dialog is shown while the program renders the VST Instrument audio to a file on your hard disk.

The Freeze button lights up and the power, bypass and edit buttons for the VST Instrument are greyed out (and the control panel closes if it was open). If you check the Project window at this point you will find that the relevant MIDI tracks have greyed out controls in the Track list and Inspector. Furthermore, the MIDI parts are locked and cannot be moved.

5. Try playing back the project.

You will hear exactly the same sound as before Freezing the VST Instrument – but the CPU load will be considerably less! You can make settings for the VST Instrument channel in the Mixer as usual – add EQ, effects, make level adjustments, etc.

Unfreezing

If you need to make adjustments (either to the MIDI tracks or to the VST instrument parameters) you need to unfreeze the VST Instrument:

- 1.** Click the Freeze button for the VST Instrument slot again.
You will be asked whether you really want to unfreeze the instrument.
- 2.** Click “Unfreeze”.
The MIDI tracks and VST Instrument are restored and the rendered “freeze file” is deleted.

12

Surround sound

Background

What is Surround sound?

Surround is a common name for various techniques for positioning audio in reference to the listener. Whereas regular stereo is limited to left/right positioning, within a relatively narrow field, surround sound opens possibilities of positioning an audio source anywhere around the listener.

Surround sound comes in many flavors, from the ill-fated Quadraphonic format for vinyl discs launched in the 70s, to today's more successful incarnations.

The differences between the formats are in two areas:

- The number and configuration of speakers.

This varies from two speakers up to 12.

- The intended final coding format.

This depends on the media the audio will be "stored" on: film, broadcast video or DVD, for example.

Surround sound is a large topic, there are entire books and regular publications devoted to the subject. This chapter will not provide an in-depth introduction to surround sound as such. Instead it will concentrate on the specific implementation in Nuendo.

Surround sound in Nuendo

Nuendo has integrated surround sound features with support for several formats. This support goes all the way through the audio path – all audio channels and busses can handle multiple speaker channel configurations (up to 12 channels). An individual channel in the mixer can either carry complete surround mixes, or an individual speaker channel which is part of a surround setup.

- Audio channels can be routed freely to surround channels.
- The Surround Panner function in the mixer allows you to graphically position channels in the surround field.

- Nuendo is ready for surround specific plug-ins, that is plug-ins with multi channel support specifically designed for surround sound mixing tasks (the included “Mix8to2” plug-in is an example of this). There are also surround aware plug-ins, which are not designed specifically for Surround but which due to their multi-channel support work well in a Surround configuration. An example is the NuendoDither plug-in.
- You configure Nuendo for surround by defining input and output busses in the desired surround format, and specifying which audio inputs and outputs should be used for the different channels in the busses. This is done in the VST Connections window.

Requirements for using Surround

The following additional equipment is required for taking advantage of Nuendo’s surround sound implementation:

- An audio card with more than two outputs.
The card must have as many outputs as the surround format you plan to select.
- A matching amplifier/speaker configuration.

Encoding

The result of a surround mix in Nuendo is either the multi-channel audio sent from the surround output bus to your surround speaker setup, or (if you use the Export audio feature) audio file(s) on your hard disk. Exported surround mixes can either be split (one mono file per speaker channel) or interleaved (a single file containing all the surround channels).

Getting from this step to the final product (surround sound on DVD disc, DTS etc.) requires special software and possibly hardware. This equipment will encode the signal into the desired format, possibly compress the audio and store it on the final media.

Exactly what type of software and/or hardware you need depends on what kind of format you are mixing for and is not dependent on Nuendo in any way.

- Steinberg provides Dolby Digital and DTS encoders for purchase, tailored for use with Nuendo.

For details, please go to www.steinberg.net.

About surround plug-ins

Included with the program are some specific surround-plug-ins. These are:

- MatrixEncoder and MatrixDecoder.

These are used for working with LRCS Surround encoded material. In LRCS Surround, four audio channels are converted to two channels, for distribution via regular video and broadcast formats. These plug-ins perform such conversions (in both ways) and are compatible with the LRCS Surround format.

- Mix6to2

The Mix6to2 effect allows you to control the levels of up to six surround channels, and to mix these down to a stereo output.

- Mix8to2

The Mix8To2 effect allows you to control the levels of up to eight surround channels, and to mix these down to a stereo output.

- MultiDelay

The MultiDelay effect can process up to 12 speaker channels, allowing you to adjust level, phase and delay individually for each channel. A typical use is to compensate for delays induced by distance in large surround environments.

- SurroundPanner

This is described on [page 285](#).

- All surround plug-ins (apart from the SurroundPanner) are described in the separate pdf document “[Audio Effects and VST instruments](#)”.

Window overview

VST Connections

In this window you can add input and output busses. There is a complete selection of common surround configurations available, as well as standard mono or stereo busses.

The Bus Name column contains the currently configured busses as they will appear in the input and output routing pop-ups in the mixer.

Selects the Input or Output bus page.

Click here to add a bus.

The outputs selected for the channels in the busses.

The screenshot shows the 'VST Connections - Outputs' window. At the top, there are tabs for 'Inputs' and 'Outputs', with 'Outputs' being the active tab. Below the tabs are buttons for 'All', 'Add Bus', and 'Presets'. The main area is a table with three columns: 'Bus Name', 'Speakers', and 'ASIO Device Port'. The table lists the following busses:

Bus Name	Speakers	ASIO Device Port
Stereo Out	Stereo	
5.1 Out	5.1	
Left		Left
Right		Right
Center		Center
LFE		LFE
Left Surround		Left Surround
Right Surround		Right Surround

The currently configured busses.


VST Connections showing the Outputs page.

Surround in the mixer

Surround sound is supported throughout every stage of the signal path in the Nuendo mixer, from input to output bus. Each bus or audio channel can carry up to 12 surround speaker channels.

Here, the SurroundPanner is used for positioning the sound "dynamically" in the surround field.

Using the Output Routing pop-up, audio channels can be routed directly to surround channels.

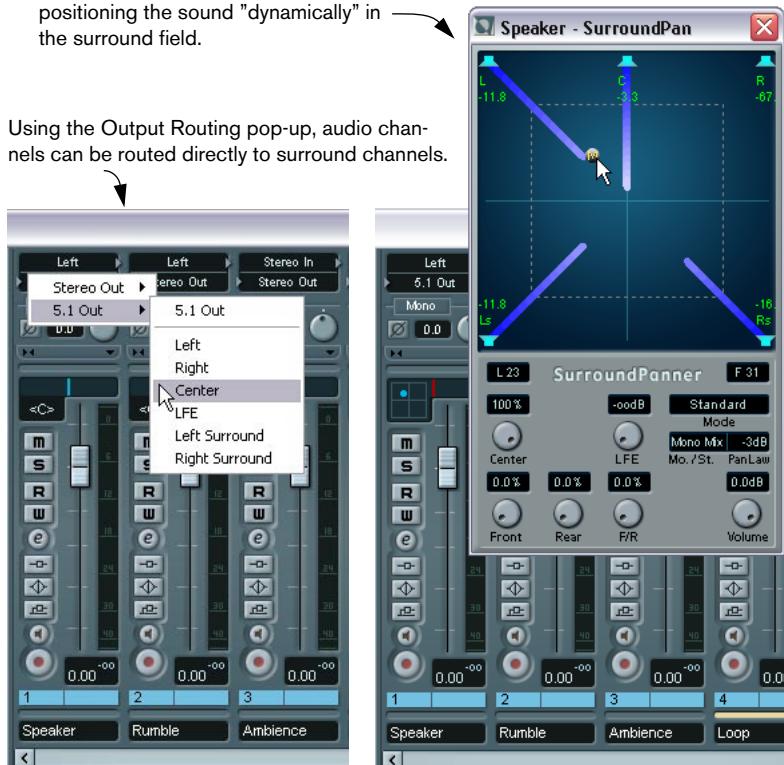

In the output channel section of the mixer you can control the master levels for configured busses. The level meter for a bus (or channel in the mixer) that carries multiple surround channels will show multiple level bars, one for each speaker channel in the surround configuration.

Operations

Setting up the surround configuration

Output bus configuration

Before you can start working with surround sound, you have to configure a surround output bus, through which all the speaker channels of the chosen surround format are routed. How to add and set up buses is described in detail on [page 14](#). Here is a brief run through:

1. Open the VST Connections window from the Devices menu.
2. Click the “Outputs” tab.
3. Click the “Add Bus” button and select one of the preset formats from the Configuration pop-up (see below).
The new bus appears with the ports visible.
4. By clicking in the ASIO Device Port column you can now route the speaker channels to the desired outputs of your audio hardware.
5. If you like, rename the output bus by clicking its name and typing in a new one.
This name will appear in the mixer and on routing pop-ups.

The following surround configurations are included:

Format	Description
LRCS	LRCS refers to Left Right Center Surround, where the surround speaker is center-rear positioned. This is the original surround format that first appeared as Dolby Stereo in cinema and later as the home cinema format Dolby ProLogic.
5.0	This is the same as 5.1 (see below) but without the LFE channel. The LFE channel is optional in 5.1 and if you don't plan to use it, you might find this option more convenient.
5.1	This format is one of the most popular in cinema and DVD. In its various cinema and DVD encoding implementations (established by different manufacturers) it is referred to as Dolby Digital, AC-3, DTS and MPEG 2 Multichannel. 5.1 has one center speaker (mainly used for speech) and four surround speakers (for music and sound effects). Additionally a sub-channel (LFE – Low Frequency Effects) with lower bandwidth is used for special low frequency effects.

Format	Description
LCR	Same as LRCS, but without the surround speaker channel.
LRS	Left-Right-Surround, with the surround speaker positioned at center-rear.
LCR+Lfe	Same as LRC but with an Lfe sub-channel added.
LRS+Lfe	Same as LRS but with an Lfe sub-channel added.
Quadro	The original Quadraphonic format for music, with one speaker in each corner. This format was intended for vinyl record players.
LRCS+Lfe	Same as LRCS but with an Lfe sub-channel added.
Quadro+Lfe	Same as Quadro but with an Lfe sub-channel added.
6.0 Cine	A Left-Right-Center front speaker arrangement with 3 (Left-Right-Center) surround channels.
6.0 Music	This uses 2 (Left/Right) front channels with Left and Right surround channels and Left and Right Side channels.
6.1 Cine	In cinema encoding formats this is referred to as Dolby Digital Surround EX and DTS-ES. It is identical to 5.1 but uses an additional full bandwidth central-rear surround speaker.
6.1 Music	Same as 6.0 Music but with an additional Lfe sub-channel.
7.0 Cine	A Left-Right-Center front speaker arrangement with Left and Right surround channels and "Left of Center" and "Right of Center" channels.
7.0 Music	A Left-Right-Center front speaker arrangement with Left and Right surround channels and "Side Left" and "Side Right" channels.
7.1 Music	Same as 5.1, but with extra "Side Left" and "Side Right" channels.
7.1 Cine	Same as 5.1, but with extra "Left of Center" and "Right of Center" speaker channels.
8.0 Cine	Same as 7.0 Cine, but with an additional Center surround channel.
8.0 Music	Same as 7.0 Music, but with an additional Center surround channel.
8.1 Cine	Same as 7.1 Cine, but with an additional Center surround channel.
8.1 Music	Same as 7.1 Music, but with an additional Center surround channel.
10.2	Same as 5.1, but with 3 "Top Front" channels (left-right-center) and 2 (left-right) "Top Rear" channels. In addition, a second Lfe sub-channel is also available.

Child busses

Essentially a child bus is a bus within a (“bigger”) bus. Typically you may want stereo child busses within your surround bus – this allows you to route stereo tracks directly to a stereo speaker pair within the surround bus. You may also want to add child busses in other surround formats (with fewer channels than the “parent bus”).

Once you have created a surround bus, you can add one or several child busses to it by right-clicking (Windows) or [Ctrl]-clicking (Mac) the bus and selecting “Add Child Bus”. This is described in detail on [page 18](#).

Input bus configuration

To work with surround sound in Nuendo, it is often not necessary to configure a surround format input bus. You can record audio files via standard inputs, and easily route the resulting audio channels to surround outputs at any stage. You can also directly import multichannel files of specific surround format onto audio tracks of the same format.

You should add a surround input bus in the following circumstances:

- You have existing audio material in a specific surround format, and you wish to transfer this material into Nuendo as a single, multi-channel file.
- You wish to record a surround setup “live”.

In both cases, you can add and configure an input bus of the format you wish to use in the VST Connections dialog so that each input on your audio hardware is routed to the corresponding speaker channel.

To add an input bus, use the same general method as described on [page 281](#), but select the “Inputs” tab instead.

Routing channels directly to surround channels

If you want to place an audio source in one separate speaker channel only, you can route it directly to that speaker channel. This is useful for pre-mixed material or multi-channel recordings that don't require panning.

1. Open the mixer and locate the channel you wish to route.
 2. From the output routing pop-up menu, select the corresponding surround speaker channel.
- If a stereo audio channel is routed directly to speaker channel, the left/right channels will be mixed to mono.

The pan control for the audio channel governs the balance between the left and right channel in the resulting mono mix. Center pan will produce a mix of equal proportion.

Routing channels using Child busses

Child busses provide a way to route stereo (or multichannel) audio channels to specific speaker channels in a surround configuration.

The most obvious application of a child bus is when you wish to add a stereo channel to two specific left/right surround speaker channels.

If you have added a child bus within a surround bus (see [page 283](#)), it appears as a submenu item within the surround bus on the output routing pop-up menu. Select this to route a stereo audio channel directly to that stereo speaker pair in the surround bus.



Using the Surround Panner

Nuendo has a special feature for graphically positioning a sound source in a surround field. This is actually a special plug-in which distributes the audio from the channel in various proportions to the surround channels.

1. Open the mixer and locate the channel you wish to position.
This could be a mono or stereo channel.
2. From the output routing pop-up menu, select the “whole surround bus” (not a surround speaker channel).
A miniature graph of the surround plug-in interface appears above the fader in the channel strip.



When the “whole” surround bus is selected, the channel strip shows a miniature surround control.

3. Click and drag directly in the miniature image to move the sound in the surround field.
The horizontal red strip to the right controls the subbass (LFE) level (if available in the selected surround format).
 - You can also view a slightly larger version of this control by selecting “Surround Pan” on the view options pop-up for the extended mixer panel.
This mode offers click and drag-panning as well as numerical values for left/right balance, front/rear balance and LFE amount – type or use a mouse wheel to adjust them.
 - For total control over surround panning, you can double click on the miniature image to open the full Surround Panner interface in a separate window.

The SurroundPan controls



The SurroundPan plug-in interface in Standard, Position and Angle mode, respectively.

The SurroundPan plug-in allows you to position your audio in the surround field. It consists of an image of the speaker arrangement, as defined by the output bus selected on the output routing pop-up menu, with the sound source indicated as a grey ball.

The following options and methods are available:

Mode – Standard/Position/Angle

The Standard Mode/Position Mode/Angle Mode switch allows you to work in three modes:

- In both Standard and Position mode, the speakers in the front are aligned, as they would normally be in a cinema-type situation. This means that the front speakers are at a varying distance from the center. Standard mode (default) is the best mode for moving sources between speakers without level attenuation.
- Angle Mode is the traditional surround sound mixing definition. Note that here the speakers are defined as being at equal distance from the center. This is not really a true representation of for example a cinema, but has still proven to work well in many situations.

-
- Different modes have different parameters, as stated in the parameter descriptions on the following pages.**
-

Speakers

The speakers in the panel represent the chosen surround configuration.

- The speakers in the front are aligned, as they would normally be in a cinema-type situation.

This means that the front speakers are at a varying distance from the center, allowing you to move sources between speakers without level attenuation.

- You can turn speakers on and off by clicking them with [Alt]/[Option] pressed. When a speaker is turned off, no audio will be routed to that surround channel.

Positioning and levels

-
- The text below assumes mono/stereo pop-up is set to “Mono Mix”. For more information on the other modes, see below.**
-

A sound source is positioned either by clicking or dragging the grey “ball” around in the panel (or by using key commands, see below). By dragging during playback you can record automation, see [page 303](#).

- In Standard Mode, the signal levels from the individual speakers are indicated by colored lines from the speakers to the center of display.
- In Position Mode, the concentric circles will help you determine the level of the signal at a certain position.
The yellow circle represents -3dB below nominal level, the red circle is at -6dB and the blue is located at -12dB. These are affected by attenuation, see below.
- In Angle Mode, a red arc helps you determine the perceived “range” of a source. The sound will be at its loudest in the middle of the arc and will have dropped in level towards the ends.

Exactly how levels are handled may require some explanation:

- When you move a source around, a number will indicate the loudness in each speaker.
This is a value in dB (decibel) and is relative to the nominal level of the source. In other words, 0.0 (dB) represents full level.
- If you position the source far enough away from a speaker, its level will drop to zero (indicated by an infinity symbol).

- The signal levels from the individual speakers are indicated by colored lines from the speakers to the center of display.
- You can use modifier keys to restrict movement in various ways:

In Standard and Position Mode:

Key	Movement restriction
[Shift]	Horizontally only
[Ctrl]/[Command]	Vertically only
[Alt]/[Option]	Diagonally (up left, down right)
[Ctrl]/[Command]+ [Alt]/[Option]	Diagonally (up right, down left)

In Angle Mode:

Key	Movement restriction
[Shift]	From center to perimeter only.
[Ctrl]/[Command]	Along the perimeter only (at current distance from center)


There is also a special set of key commands for working in the SurroundPan window.

-
- For a complete list of the available key commands, click on the “Surround-Panner” logo and then click again!
-

The LFE dial (All Modes)



If the selected surround setup includes an LFE (Low Frequency Effects) channel, a separate LFE level dial will be available in the SurroundPan window. Use this to set the signal amount sent to the LFE channel. You can also set this using the small red strip to the right of the Surround Panner in the mixer channel strip, or by typing in a numerical value in the larger Surround Panner that can be shown in the extended channel strip.

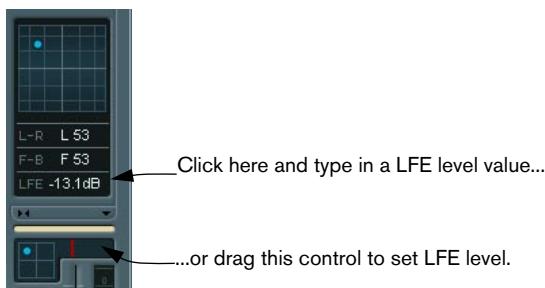

The Surround Panner in the channel strip (bottom) and in the extended panel of the mixer channel strip ("SurroundPan" activated).


Mono/stereo pop-up (All Modes)

If you have a mono channel this is by default set to Mono Mix. The panner will then behave as described above.

If you have a stereo channel, you have the option of using one of the three Mirror modes. Two grey balls will then appear, one for each channel (L/R). This will allow you to move the two channels symmetrically, by just dragging one of them. The three modes allow you to select which axis should be used for mirroring.

- The default mode for stereo channels is the Y-Mirror mode.
- If you run a stereo signal through the panner in Mono Mix mode, the two channels will be mixed together before entering the plug-in.
- If you run a mono signal through the plug-in in one of the stereo modes, the signal will be split before entering the plug-in.

Additional Parameters (Standard Mode)



- **Center Level.**

This determines how center source signals should be reproduced by the front speakers. With a value of 100%, the center speaker will provide the center source. With a value of 0%, the center source will be provided by the ghost image created by the left and right speakers. Other values will produce a mix between these two methods.

- **Divergence Controls.**

The three divergence controls determine the attenuation curves used when positioning sound sources, for X-axis front, X-axis back and Y-axis (front/rear), respectively. If all three Divergence values are 0% (default), positioning a sound source on a speaker will set all other speakers to zero level (∞) (except for the center speaker which depends on the center level). With higher values, the other speakers will receive a percentage of the sound source.

Additional Parameters (Position and Angle Mode)



- **Attenuate.**

Attenuate can be used to amplify or weaken the source. Exactly what effect this has on the level in each speaker can be determined by the level readouts, the concentric circle (Position mode) and the arc (Angle mode).

- **Normalize.**

Normalize is a function for controlling the overall loudness from all speakers. When this is set to 1.0 (full normalization), the level from all speakers together is always exactly 0dB. The individual levels will then be boosted or attenuated accordingly.

- Please note that this is not a dynamic feature, like compression or limiting. It is instead just a tool for scaling the nominal output levels from the surround channels.**

Automation

All parameters in the SurroundPan plug-in can be automated, just as with any other plug-in. See [page 303](#).

Exporting a Surround mix

When you have set up a surround mix you can choose to export it with the Export Audio Mixdown function. This function exports a single selected output bus – this means that all channels that you want to be part of the mix must be routed to the surround output bus.

You have the following export options when doing surround work:

- Export to “split” format, resulting in one mono audio file for each surround channel.
- Export to interleaved format, resulting in a single multi-channel audio file (e.g. a 5.1 file, containing all six surround channels).
- Under Windows you can also export a 5.1 surround mix to a file in Windows Media Audio Pro format.

This is an encoding format tailored for 5.1 surround – see [page 609](#).

- You can also export a surround mix to a Dolby Digital AC3 file or a DTS file, if you have the Steinberg Dolby Digital Encoder or the Steinberg DTS Encoder (both optional, separate plug-ins) installed in your system.

Please go to www.steinberg.net for details.

For more about exporting to files, see the chapter “[Export Audio Mixdown](#)”.

Using effects in surround configurations

Nuendo introduces a special surround format for VST plug-ins, that is plug-ins that can process more than two channels. Examples of such plug-ins are Mix8to2 and MultiDelay.

Applying a Surround-aware plug-in

This is not different from applying a regular plug-in. The only difference is that the plug-in panel may have controls for more than two channels.

Using a stereo plug-in in a surround configuration

Normally, when you apply a stereo insert effect to a surround configuration, the first two speaker channels (often L and R) are routed through the plug-in and other channels are left unprocessed.

However, you may want to use the plug-in on other speaker channels. This is described on [page 236](#).

13

Automation

Background

Nuendo provides very comprehensive automation features. Virtually every mixer and effect parameter can be automated.


There are two main methods you can use to automate parameter settings:

- By manually drawing curves on automation subtracks in the Project window.

See [page 310](#).



- By using the Write/Read buttons and adjusting parameters in the mixer. See [page 303](#).

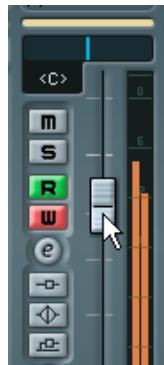

The methods are not different in terms of how the automation data is applied – they only differ in the way the automation events are created; manually drawing them or recording them. Any applied automation data will be reflected in both the mixer (a fader will move for example) and in a corresponding automation track curve (although this may be hidden).

About automation subtracks

Audio tracks, group tracks and FX channel tracks all have automation subtracks. These allow you to view and edit the automation of all mixer settings for the track, including settings for the track's insert effects. There is one automation subtrack for each automatable parameters, and subtracks can be shown or hidden in any combination.

Similarly, MIDI tracks have automation subtracks for mixer settings, track parameters as well as send and insert effect settings (if used).

VST Instruments have special automation tracks that appear in the Project window when you add a VST Instrument. There is one automation track for the plug-in parameters and one track for each mixer channel used by the instrument. These tracks all have automation subtracks, giving you access to all parameters and mixer settings.

Finally, for ReWire channels and input/output channels, automation tracks are automatically added as soon as you activate automation (with the Write button) in the corresponding mixer channel strip or Channel Settings window. These automation tracks have subtracks for all parameters as well.

What can be automated?

Mixing in Nuendo can be completely automated. The following parameter settings can be recorded automatically – or manually drawn in – on automation subtracks:

For each audio or group track and ReWire channel:

- Volume
- Mute
- Pan left/right
- 8 x insert effect program selection and effect parameters (if inserts are used)
- 8 x effect send on/off switches
- 8 x effect send levels
- Surround panner parameters
- EQ master bypass
- Settings for 4 EQ modules (enable/freq/quality/gain)

For each FX channel track and input/output bus:

- Volume
- Mute
- Pan left/right
- 8 x insert effect program selection and effect parameters (if inserts are used)
- Surround panner parameters
- EQ master bypass
- Settings for 4 EQ modules (enable/freq/quality/gain)

For each VST Instrument

- VST Instrument plug-in parameters and program selection
 - plus (for each mixer channel/separate output used by the instrument):
- Volume
- Mute
- Pan left/right
- 8 x insert effect program selection and effect parameters (if inserts are used)
- 8 x effect send on/off switches
- 8 x effect send levels
- Surround panner parameters
- EQ master bypass
- Settings for 4 EQ modules (enable/freq/quality/gain)

For each MIDI track

- Volume
- Pan
- Mute
- Track parameters on/off switch
- Transpose
- Vel. shift
- Random 1-2 min/max/target
- Range 1-2 min/max/target
- 4 x insert effect on/off switches
- 4 x send effect on/off switches
- 4 x MIDI insert effect parameters (if used)
- 4 x MIDI send effect parameters (if used)

Automation track operations


Opening automation subtracks

Every track/channel has a number of automation subtracks, each showing one automation parameter.

For audio, group, MIDI and FX channel tracks, there are two ways you can open an automation subtrack for the channel:

- By right-clicking (Win) or [Ctrl]-clicking (Mac) the track in the Track list and selecting “Show Automation” from the pop-up that appears.
- By clicking on the “Show/Hide Automation” button (the plus sign) in the Track list for the channel.

An automation subtrack opens in the Track list, and a straight black horizontal line is shown as well as a greyed out mirror image of the audio events' waveform (or MIDI events for MIDI tracks) in the event display. By default, the volume parameter is assigned to the first subtrack.

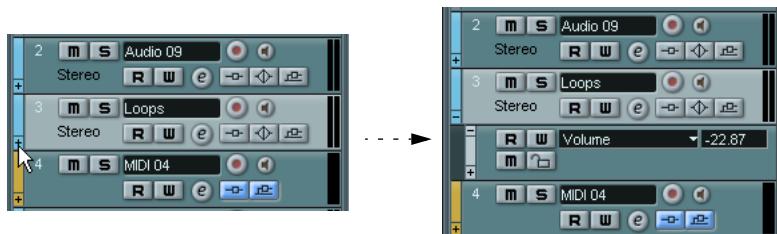

Click the “+” button to open an automation subtrack.

For VST Instruments, automation tracks appear automatically when you add VST Instruments.

For ReWire channels and input/output busses, automation tracks are automatically created when the Write automation button (see [page 303](#)) is activated in either:

- The corresponding channel strip in the mixer.
- The corresponding Channel Settings window.
- The mixer common panel (“Write All”).
- The area above the Track list (“Write All”)

Opening additional automation subtracks


- If you click on the “Append Automation Track” button (the “+” sign) for an automation subtrack, another subtrack opens, by default showing the next parameter in the Add Parameter list (see below).



Assigning a parameter to an automation subtrack


Default parameters are already assigned to automation subtracks when you open them, according to their order in the Add Parameter list (see below). To select what parameter an open subtrack should display, proceed as follows:

1. If none exists, open an automation subtrack using one of the methods described above.
2. Click in the parameter display for the automation subtrack. A pop-up list is shown containing some of the automation parameters plus the item “More...” at the bottom of the list.

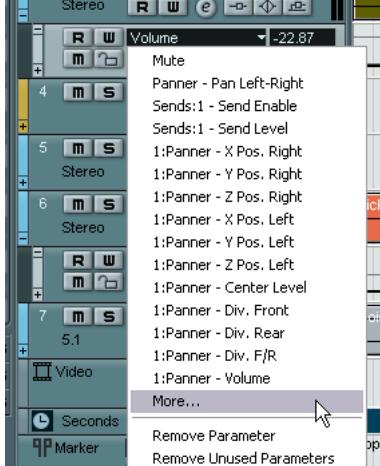

- If the parameter you wish to automate is on the pop-up you can select it directly.
The parameter will then replace the current parameter in the automation subtrack.
 - If you wish to add a parameter not available on the pop-up and want to view all parameters that can be automated, go on to the next step.
- 3. Select “More...”.**

The Add Parameter dialog appears. This dialog shows a list with all parameters, sorted into different categories, that can be automated for the selected channel, including the parameters for any assigned insert effects. See [page 295](#) for a list of the available parameters according to channel type.

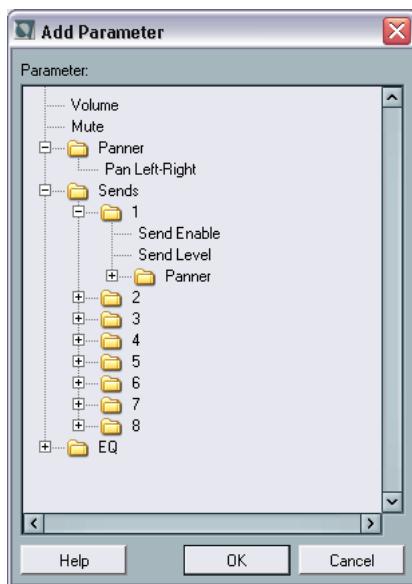

The Add Parameter dialog for an audio track.

- 4. Select a parameter from the list and click OK.**

The parameter will then replace the current parameter in the automation subtrack.

- To view the parameters in each category click the “+” sign for the category folder.

- Note that the “replacing” of the parameter displayed in the subtrack is completely non-destructive.

For example, if the subtrack contained any automation data for the parameter you just replaced, this data would still be there, although it would not be visible after you replaced the parameter. If you click in the parameter display you can switch back to the replaced parameter. All automated parameters are indicated by an asterisk (*) after the parameter name on the pop-up menu.



The Volume parameter is automated.

You can click the “Show/Hide Automation” button (the plus sign) for the automation subtrack to open additional subtracks and repeat the above procedure to assign a parameter to each subtrack.

Removing automation subtracks

To remove automation subtracks from the Track list, proceed as follows:

- To remove a single subtrack, click the parameter name and select “Remove Parameter” from the pop-up menu.

Note that this will also delete any automation events on the subtrack, and the subtrack will be closed.


- To remove all currently unused subtracks from a track in the Track list, select “Remove Unused Parameters” from any of its subtrack parameter name pop-ups.

All subtracks that do not contain automation events will be closed for the selected track.

Hiding automation subtracks

- To hide a single automation subtrack, click the “Hide Automation” button (the minus sign) in the Track list.
- To hide all automation subtracks for a track, right-click (Win) or [Ctrl]-click (Mac) the track for which you wish to hide the automation subtracks, and select “Hide Automation” from the pop-up menu that appears.
- To hide all automation subtracks for all tracks in the Track list, right-click (Win) or [Ctrl]-click (Mac) any track and select “Hide All Automation” from the pop-up menu that appears.
This option is also available on the Project menu.

Showing only used automation subtracks



If a lot of automation subtracks are used, it may be impractical to have them all open in the Track list. If you want to view only the subtracks that are used (i.e. those that actually contain automation events) and hide all empty automation subtracks, do one of the following:

- Right-click (Win) or [Ctrl]-click (Mac) any track in the Track list and select the option “Show Used Automation for All Tracks” from the pop-up menu.
This will close all automation subtracks not containing any automation events, while leaving used subtracks open for all tracks. This option is also available on the Project menu.
- Right-click (Win) or [Ctrl]-click (Mac) a specific track and select the option “Show Used Automation” from the pop-up menu.
This will close all automation subtracks not containing any automation events, while leaving used subtracks open for the selected track.

Muting automation subtracks



You can mute individual automation subtracks by clicking their Mute buttons in the Track list. While clicking the Read (R) button (see [page 303](#)) for an automation subtrack will activate or deactivate Read mode for *all* automated parameters of the track, using the Mute button allows you to turn off automation for a single parameter.

The “Automation follows Events” setting

If you activate “Automation follows Events” on the Edit menu (or in the Preferences–Editing dialog), automation events will automatically follow when you move an event or part on the track.

This makes it easy to set up automation related to a specific event or part, rather than to a specific position in the project. For example, you can automate the panning of a sound effect event (having the sound pan from left to right, etc.) – if you need to move the event, the automation will automatically follow! The rules are:

- All automation events for the track between the start and end of the event or part will be moved.
If there are automation events in the new position (to which you move the part or event), these will be overwritten.
- If you duplicate an event or part (by [Alt]/[Option]-dragging or by using the Duplicate or Repeat functions) the automation events will be duplicated as well.
- This function affects copying and pasting as well.

Using Write/Read automation

All track types except folder, marker, video and ruler tracks feature Write (W) and Read (R) buttons in the mixer, in the Track list and in the Channel Settings window. Furthermore, the control panels for all plug-in effects and VST Instruments also feature Write and Read buttons.



The Write and Read buttons for a channel in the mixer, and for an automation subtrack in the Track list.

- If you activate Write for a channel, all mixer parameters you adjust during playback for that specific channel will be recorded as automation events.
- If you activate Read for a channel, all your recorded mixer actions for that channel will be performed during playback, just like you performed them in Write mode.
- The W and R buttons for a track in the Track list are mirrors of the W and R buttons in the corresponding channel strip in the mixer.
- Some track types require that you activate the Write button (either for the track or globally – see below) to create an automation track for it. These are: VST Instrument, ReWire and Input/Output tracks. The first time the Write button is activated for these track types, automation subtracks will be created for them. You can then proceed with automating the parameters of the tracks (by editing the automation subtracks or by writing, as described below). To play back the automation, make sure the Read button for the tracks is activated.

There are also global Read All and Write All Automation buttons in the mixer's common panel and at the top of the Track list:



The global Write and Read buttons in the mixer, and in the Track list.

- When Read All is activated, all your recorded mixer actions for all channels will be performed during playback.
- When Write All is activated, all mixer actions you perform during playback (for all channels) will be recorded as automation events.

About the five automation modes



When recording automation, you can choose one of five automation modes (available on the Project window toolbar):

- When **Touch Fader** mode is selected, the program starts writing the automation as soon as you click the control and stops writing when you release the mouse button.
- For most plug-in parameters (audio effects and VST Instruments), there is no way for the program to “know” whether a control is “pressed” or not (this information is not passed back by the plug-in interface). For this reason, automation of most plug-in parameters will work as in Autolatch mode (see below), even if Touch Fader is selected.

- When Autolatch mode is selected, the program starts writing the automation as soon as you click the control and stops writing when you stop playback or turn off the Write function.

The last automation value will be continuously written until you stop or turn off Write. This is useful if you want to overwrite a long section of previous automation, and also when you are recording automation from a remote device (because then there is no way for the program to know when you “release” the control). However, make sure you only touch the desired control(s) when recording automation in Autolatch mode – and remember to stop playback when you’re done!

- X-Over mode works like Autolatch mode, but with one difference: As soon as you “cross” any existing (previous) automation curve, the writing is automatically turned off.
- Overwrite mode affects volume automation only. It works like Autolatch mode, with one significant difference: the program starts writing the automation as soon as you start playback, and stops writing when you turn off Write.

This means that automation will be written continuously from the moment you start playback until you turn off Write – even if you don’t touch any controls. This is useful if you want to have a “clean slate” and redo previous volume automation.

- Trim mode is useful for volume automation only. It offsets the volume automation curve without overwriting any previous volume automation, letting you adjust the volume for already existing automation.

In Trim mode, the channel’s volume fader in the mixer is initially positioned in the exact middle position, regardless of any existing volume automation. By raising the fader relative to the middle position, you offset the volume curve upwards. By lowering the fader, you offset the volume curve downwards. In Trim mode, the program starts writing the automation as soon as you click the control and stops writing when you release the mouse button.

- Trim mode has a special feature: if you enable Write automation when playback is stopped and select Trim mode, you can use the fader to trim (offset) the volume curve between the left and right locator.

This makes it easy to e.g. raise the relative volume in a specific area: set the locators accordingly, enable Write, select Trim mode and raise the level fader.

Recording your actions – an example

If the settings in your current project are crucial, you may not want to “experiment” with automation until you know more about how it all fits together. If so, you can create a new project for the following example. It doesn’t even have to contain any audio events, just a few audio tracks. Proceed as follows:

1. Open the Mixer window.
2. Click the “Write All” button in the mixer common panel.
Nuendo is now in global Write mode.
3. Start playback, and adjust some volume faders and/or other parameter settings in the mixer or perhaps in a Channel Settings window.
Stop playback when you are done, and return to the position where you started playback.
4. Deactivate Write mode, and click the Read All button in the mixer common panel.
Nuendo is now in global Read mode.
5. Start playback, and watch the Mixer window.
All your actions performed during the previous playback will be reproduced exactly.
6. If you wish to redo anything that was recorded, activate Write mode again, and start playback from the same position.
 - You can have Write and Read activated simultaneously, if you want to watch and listen to your recorded mixer actions while you’re recording fader movements for another mixer channel, etc.

Recording plug-in automation

Every parameter for every assigned effect or VST Instrument can be automated in much the same manner as described above.


The following example assumes that you have assigned an insert effect to an FX channel track (see [page 246](#)), and describes how to record automation for the effect:

1. Activate Write All in the mixer common panel or in the Track list to put Nuendo in global Write mode.
2. Select the FX channel track in the Track list and open its Inserts section in the Inspector.
If the Inspector is hidden, click the “Show Inspector” button in the Project window toolbar.
3. Open the control panel for the effect by clicking the Edit button (“e”) above the insert effect slot in the Inspector.
4. Click the Write button in the control panel to activate Write mode.
All effects and VST Instruments have Write/Read buttons on their control panels. These work exactly like the corresponding buttons in the mixer or in the Track list. In the previous example, we used global Write mode, in which mixer and parameter changes are recorded on all tracks, but in this example we'll use Write mode for one track only.
5. Start playback and adjust some effect parameters in the control panel.
When you are finished, stop playback and return to the position where you started playback.
6. Deactivate Write and instead click the Read button on the control panel.
7. Start playback, and watch the control panel.
All actions you performed during the previous playback will be reproduced exactly.

Assigning an automated parameter to an automation subtrack

To select which parameter is currently shown in the automation track for the FX channel, proceed as follows:

1. Click in the parameter display for the FX channel automation subtrack. The parameter display pop-up list is shown containing the automation parameters for the plug-in. The parameter(s) you previously automated are indicated by an asterisk after the parameter name in the list.

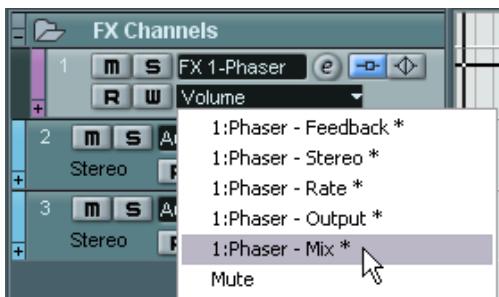

Automated parameters for the Phaser effect.

2. Select the parameter you wish to view from the parameter display pop-up.

The automation curve for the parameter you selected is displayed on the automation subtrack.

- To view VST Instrument parameters you use the same method, but for the first automation track for the instrument.
As described earlier, each VST Instrument have two or more automation tracks - one for the plug-in settings and one for each VST Instrument mixer channel.

Where did the automation data I recorded end up?

When using Write All automation, you can write automation data on all channels' automation tracks. In the previous write operations, you probably added automation events for many different channels and parameters.

- To view all the automation events you recorded during the operations, select "Show Used Automation" from the Project menu.


Now the automation data for every channel parameter that you adjusted in the mixer during Write mode is shown on corresponding subtracks in the Project window. The automation events recorded are shown as points in the automation curves.

Working with automation curves

About automation curves

There are two kinds of automation curves, “ramp” and “jump”:

- Jump curves are created for any parameter that only has on/off values, like a Mute button, for example.
- Ramp curves are created for any parameter that generates continuous multiple values, such as fader or dial movements etc.

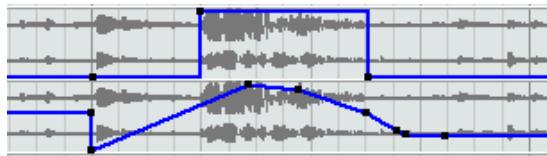

Examples of jump (top subtrack) and ramp automation curves shown in the event display.

About the static value line

When you first open an automation subtrack for a parameter, it doesn't contain any automation events (unless you have previously adjusted that parameter with write automation activated), and this is reflected in the event display as a straight horizontal black line, the “static value” line. This line represents the current parameter setting.

- If you have manually added any automation events or used write automation for the corresponding parameter, and then deactivate Read mode, the automation curve will be greyed-out in the automation subtrack event display and the static value will be used instead.

As soon as Read mode is activated the automation curve will become available.


Editing automation events

Drawing automation events

By using write automation in the mixer, you generate automation events by moving parameter dials and fader settings in the mixer. You can also add them manually, by drawing automation curves on an automation subtrack. Proceed as follows:

1. Open a volume automation subtrack for an audio track by clicking the "+" sign.


The static value line is shown in the event display.

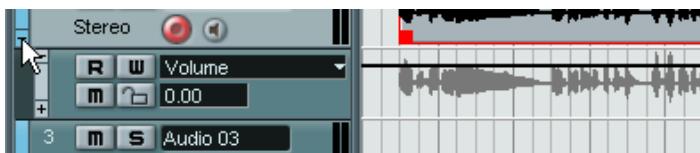


2. Select the Pencil tool.

You can also use the Pencil tool in other modes for drawing curves, see below.

3. If you click on the static value line, an automation event is added, read automation mode is automatically activated, and the static value line changes to a blue automation curve.

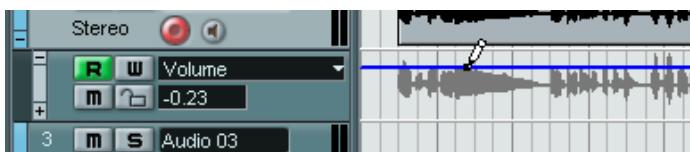


4. If you click and hold, you can draw a curve, by adding a multitude of single automation events.

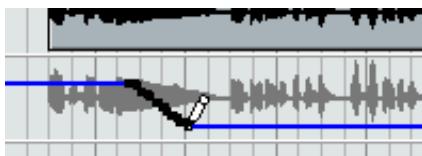

- When you release the mouse button, the number of automation events is reduced to a few events, but the basic shape of the curve still remains the same.

This “thinning” of events is governed by the Automation Reduction Level setting in the Preferences dialog, see [page 316](#).

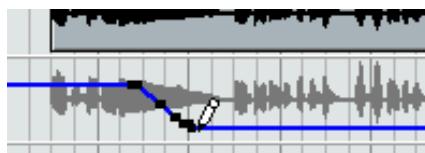

- If you now activate playback, the volume will change with the automation curve.

In the mixer the corresponding fader moves accordingly.

- Simply redo the operation if you are not happy with the result.

If you draw over existing events, a new curve is created.


- If the automation subtrack is in Read mode already, you can also add automation events by clicking with the Arrow tool.

If you are trying to add a point between two existing points and the new point doesn't deviate from the existing curve, it will be removed by reduction (see [page 316](#)) as soon as you release the mouse button.

Using the Pencil tool in other modes to draw automation curves

Other Pencil tool modes can be very useful for drawing automation events. The various modes are accessed by clicking on the Pencil tool on the toolbar and selecting from the pop-up that appears.

- Clicking and dragging with the Pencil tool in Line mode shows a line in the automation subtrack, and creates automation events aligned with this line. This is a quick way to create linear fades, etc.




- The Parabola mode works in the same way, but aligns the automation events with a parabolic curve instead, giving more “natural” curves and fades.

Note that the result depends on the direction from which you draw the parabolic curve.



- The Sine, Triangle and Square modes create automation events aligned with continuous curves.


If snap is activated and set to Grid, the period of the curve (the length of one curve "cycle") is determined by the grid setting. If you press [Shift] and drag, you can set the period length manually, in multiples of the grid value.



Selecting automation event points

- To select a single automation event point, click on it with the Arrow tool. The point turns red, and you can drag it in any horizontal or vertical direction between two points.
- To select multiple curve points, you can either [Shift]-click or drag a selection rectangle with the Arrow tool.

All events inside the selection rectangle will become selected.



Draw a selection rectangle around some points to select them.

When selected, several points can be moved in all directions as "one", i.e. the curve shape formed by the selected event points remains intact.

- To select all automation events on a subtrack, right-click (Win) or [Ctrl]-click (Mac) the automation subtrack in the Track list and choose "Select All Events" from the context menu.



Removing automation events

There are several ways to remove event points:

- By selecting points and pressing [Backspace] or [Delete] or selecting Delete from the Edit menu.
- By clicking on a point with the Eraser tool.
- By selecting a range (with the Range Selection tool), and pressing [Backspace] or [Delete] or selecting Delete from the Edit menu.
- By clicking in the parameter display on a subtrack and selecting “Remove Parameter” from the pop-up.

This will remove *all* automation events from the subtrack, and the subtrack will be closed.

Editing automation events


Automation events can be edited much like other events. You can use cut, copy and paste, you can group and nudge events etc. There are however four items on the Edit menu that are not applicable to automation events. These are:

- Split at Cursor
- Split Loop
- Move to Front
- Move to Back

Editing automation events in the Project Browser

You can also edit automation events in the Project Browser. Proceed as follows:

1. Open the Project Browser by selecting it from the Project menu. The Browser window opens. The window is divided into two sections, the Structure list to the left, and the event display to the right.
2. Click on the “+” sign for a track in the structure list. Automated tracks have two subitems: Track Data and Automation. The Automation item corresponds to the automation subtrack in the Project window, and contains the track's automation events.
3. Click on the plus sign for the Automation item. All automated parameters for the track are shown in the structure list.
4. Clicking on a parameter in the structure list brings up the automation events in the event display.

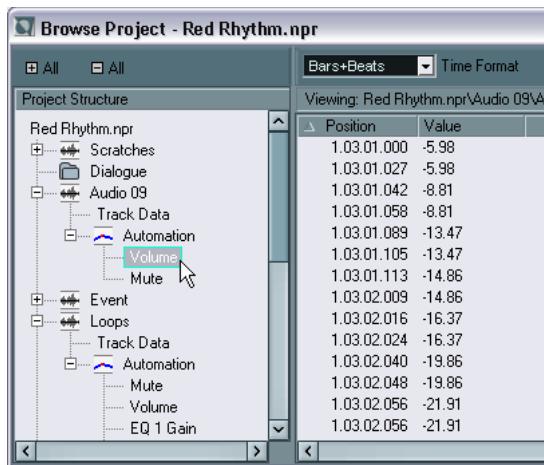

The following parameters are available for all automation subtracks:

Parameter	Description
Position	The position of the automation event.
Value	The value (0.000 to 1.000) of the automation event.

Tips and common methods

There are no hard and fast rules when it comes to describing which automation method you should use. You can for example never even open an automation subtrack, and stick with write automation throughout a project. Or you can stick to drawing automation curves to automate settings in a project. Both methods have their advantages, but it is of course up to you to decide what to use and when.

- Editing curves on automation subtracks offers a graphical overview in relation to the track contents and the time position.

This makes it easy to quickly change parameter values at specific points, without having to activate playback. For example, this method gives you a good overview if you have a voice-over or a dialog on one track and a music bed on another track, the level of which needs to be lowered with a specific amount every time the dialog occurs.

- By using write automation in the mixer you don't have to manually select parameter subtracks from the Add Parameter list.

You can work much like you would using a "real" physical mixer. Every action you perform is automatically recorded on subtracks which you can later open for viewing and editing of the parameters you changed.


These are just two examples of advantages for each method. Generally, editing curves and using write automation are two methods that complement each other, and depending on the nature of your projects you will probably work out what method works best for a given situation.

Options and Settings


About the Automation Reduction Level preference

This item can be found on the Editing page in the Preferences dialog. Automation reduction reduces the number of automation events *after* you have used write automation or added automation events manually. When you write (or draw with the Pencil tool) automation events, these are added as a continuous stream of densely packed events. This is necessary because the program cannot “guess” what you will be doing next! However, when you are done, the reduction function will remove all superfluous event points and the automation curve now contains only the event points necessary to reproduce your actions.

For example, all event points that might exist between two other points, but do not deviate from the curve, will be automatically removed by reduction.



If you try to add an event that doesn't deviate from the existing curve between two existing points...



...it will be removed when the mouse is released. If you moved the selected event by any amount so that the resulting curve isn't a straight line, the event would of course be added.

- If you feel you need a lower (or higher) reduction level of events than the default setting of roughly 75% reduction, you can change it, but normally the default setting works well.
- A minimum reduction level setting is not recommended as this will simply retain a lot of unnecessary events.

14

Remote controlling the mixer

About this chapter

It is possible to control the Nuendo mixer via MIDI. A large number of MIDI control devices are supported. This chapter describes how to set up Nuendo for remote control.

- For specific information about the supported remote control devices, see the separate “Remote Control Devices” pdf document.
- There is also a Generic Remote Device, allowing you to use any MIDI controller to remote control Nuendo.
How to set this up is described on [page 322](#).

Setting Up

Connecting the remote device

Connect the MIDI Out on the remote unit to a MIDI In on your MIDI interface. Depending on the remote unit model, you may also need to connect a MIDI Out on the interface to a MIDI In on the remote unit (this is necessary if the remote unit features “feedback devices” such as indicators, motorized faders, etc.).

If you will be recording MIDI tracks, you don’t want any MIDI data from the remote unit to accidentally be recorded as well. To avoid this, you should also make the following setting:


1. Open the Device Setup dialog from the Devices menu.
2. Select “All MIDI Inputs” in the list to the left.
3. Check the list to the right and locate the MIDI input to which you have connected the MIDI remote unit.
4. Click in the “Active” column for that input to set it to “No”.
5. Click OK to close the Device Setup dialog.

Now you have removed the remote unit input from the “All MIDI Inputs” group. This means that you can record MIDI tracks with the “All MIDI Inputs” port selected without risking to record the data from the remote unit at the same time.

Selecting a remote device

1. Pull down the Devices menu and select Device Setup.
A dialog window opens with a list of devices shown in the left part of the window.
2. If you can't find the remote device you are looking for, click on the Add/Remove tab and select it from the Device Classes list.
Click "Add" to add it to the Devices list.
- Note that it is possible to select more than one remote device of the same type.
If you have more than one remote device of the same type, these will be numbered in the Devices list.
3. Now click the Setup tab and select your MIDI control device model from the Devices list.

Depending on the selected device, either a list of programmable function commands or a blank panel is shown in the right half of the dialog window.

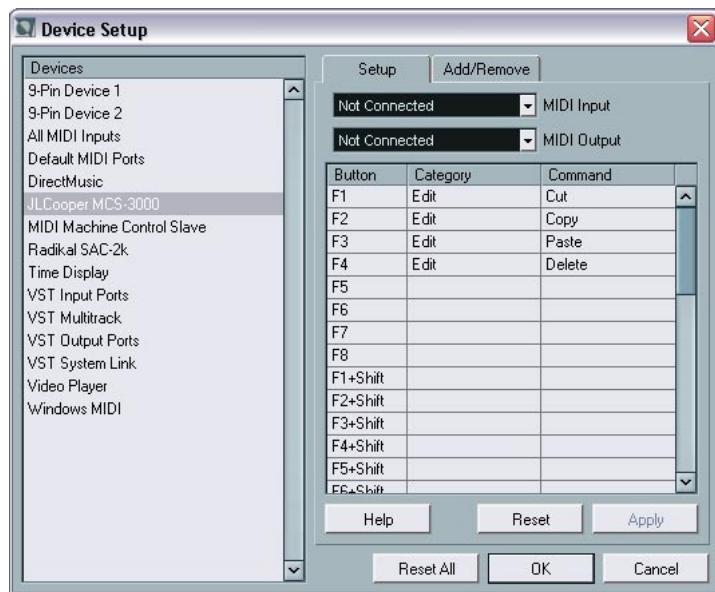

A JL Cooper MCS-3000 selected as remote control device.

4. Select the correct MIDI input from the pop-up menu.
5. If necessary, select the correct MIDI output from the pop-up menu.

6. Click OK to close the dialog.

You can now use the MIDI control device to move faders and knobs, activate Mute and Solo, etc. The exact parameter configuration depends on which external MIDI control device you are using.

Operations

Writing automation using remote controls

Automating the mixer using a remote control device is basically done in the same way as when you operate on-screen controls in Write mode. However, when it comes to *replacing* existing automation data, there is one important difference:

- If you activate Write mode and move a control on the remote control device, all data for the corresponding parameter is replaced from the position where you moved the control, up until the position where playback is stopped!

In other words, as soon as you have moved a control in Write mode, it remains "active" until you stop playback. The reason for this is explained below.

As a consequence, an additional precaution must be taken:

- Make sure you move only the controller you want to replace!

In order to replace existing automation data for a control, the computer needs to know how long the user actually "grabbed" or used the control. When doing this "on screen", the program simply detects when the mouse button is pressed and released. When you are using an external remote control device, however, there is no mouse button involved, and Nuendo cannot tell whether you "grab and hold" a fader, or simply move it and release it. Instead, you have to indicate that you have "released" the control by stopping playback.

The above does not apply to the JLCooper MCS 3000 device. This device has touch sensitive faders, which means that it stops writing as soon as you release the fader.

This is only relevant when you are using a remote control device and Write mode is activated in the mixer.

Assigning remote key commands

For some of the supported remote devices, you can assign any Nuendo function (that can be assigned a key command) to generic buttons, wheels or other controls. As of this writing, these devices are:

- JL Cooper MCS 3000
- JL Cooper CS-10
- CM Automation Motor Mix

Proceed as follows:

1. Open the Device Setup dialog and select one of the remote devices that support this feature.

On the right side of the window there are three columns. This is where you assign commands.

2. Use the “Button” column to locate a Remote device control or button to which you wish to assign a Nuendo function.

3. Click in the “Category” column for the control, and select one of the Nuendo function categories from the pop-up menu that appears.

4. Click in the “Command” column, and select the desired Nuendo function from the pop-up menu that appears.

The available items on the pop-up menu depend on the selected category.

5. Click “Apply” when you are done.

The selected function is now assigned to the button or control on the remote device.


A note about remote controlling MIDI tracks

While most remote control devices will be able to control both MIDI and audio channels in Nuendo, the parameter setup may be different. For example, audio-specific controls (such as EQ) will be disregarded when controlling MIDI channels.

The Generic Remote device

If you have a generic MIDI controller, you can use this for remote control of Nuendo by setting up the Generic Remote device:


1. Open the Device Setup dialog on the Devices menu.
If the Generic Remote device isn't on the Devices list, you need to add it:
 2. Click the “Add/Remove” tab and select the “Generic Remote” device in the list to the right.
 3. Click the Add button.
- When the Generic Remote device is added in the Device Setup dialog, you can open the Remote Status window by selecting “Generic Remote” from the Devices menu.



The Remote Status window

- Click the Setup tab and select the Generic Remote device in the Devices list to the left.

The settings for the Generic Remote device are displayed, allowing you to specify which control on your device should control which parameter in Nuendo.

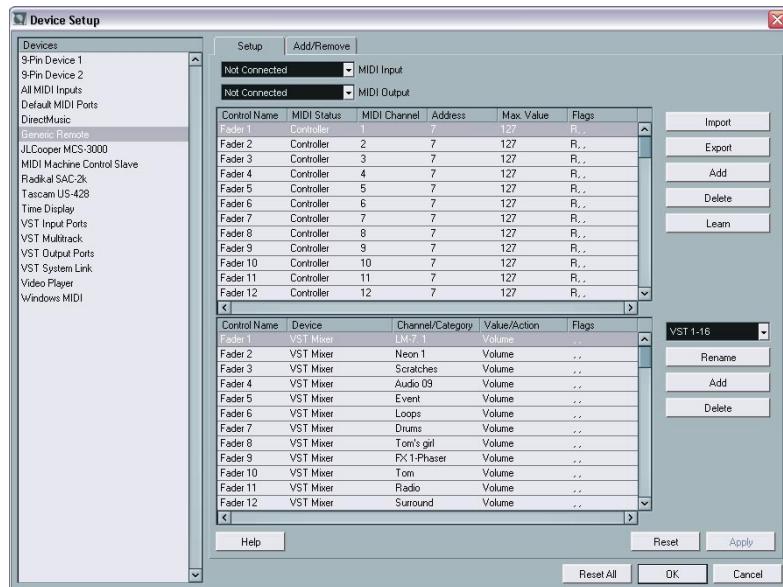

- Use the MIDI Input and Output pop-up menus to select the MIDI Port(s) to which your remote device is connected.
- Use the pop-up menu to the right to select a bank.

The concept of banks is based on the simple fact that most MIDI devices can control a limited number of channels at a time (often 8 or 16). For example, if your MIDI control device has 16 volume faders, and you are using 32 mixer channels in Nuendo, you would need two banks of 16 channels each. When the first bank is selected you control channel 1 to 16; when the second Bank is selected you control channel 17 to 32. Since you can control Transport functions as well, you may need several banks.

- Set up the upper table according to the controls on your MIDI control device.

The columns have the following functionality:

Column	Description
Control Name	Double clicking this field allows you to enter a descriptive name for the control (typically a name written on the console). This name is automatically reflected in the Control Name column in the lower table.
MIDI Status	Clicking in this column pulls down a pop-up menu, allowing you to specify the type of MIDI message sent by the control. The options are Controller, Program Change, Note On, Note Off, Aftertouch and Polyphonic Pressure. Also available are Continuous Control NRPN and RPN, a way to extend the available control messages. The "Ctrl JLCooper" option is a special version of a Continuous Controller where the 3rd byte of a MIDI message is used as address instead of the 2nd byte (a method supported by various JL-Cooper remote devices).
MIDI Channel	Clicking in this column pulls down a pop-up menu, allowing you to select the MIDI channel on which the controller is transmitted.
Address	The Continuous Controller number, the pitch of a note or the address of a NRPN/RPN Continuous Controller.
Max. Value	The maximum value the control will transmit. This value is used by the program to "scale" the value range of the MIDI controller to the value range of the program parameter.
Flags	Clicking in this column pulls down a pop-up menu, allowing you to activate or deactivate three flags: <ul style="list-style-type: none">• Receive – activate this if the MIDI message should be processed on reception.• Transmit – activate this if a MIDI message should be transmitted when the corresponding value in the program changes.• Relative – activate this if the control is an "endless" dial, which reports the number of turns instead of an absolute value.

- If you find that the upper table holds too many or too few controls, you can add or remove controls with the Add and Delete buttons to the right of the upper table.
- If you are uncertain of which MIDI message a certain controller sends, you can use the Learn function:
Select the control in the upper table (by clicking in the Control Name column), move the corresponding control on your MIDI device and click the Learn button to the right of the table. The MIDI Status, MIDI Channel and Address values are automatically set to those of the moved control.

- 8.** Use the lower table to specify which Nuendo parameters you want to control.

Each row in the table is associated to the controller in the corresponding row in the upper table (as indicated by the Control Name column). The other columns have the following functionality:

Column	Description
Device	Clicking in this column pulls down a pop-up menu, used for determining which device in Nuendo should be controlled. The special option "Command" allows you to perform certain command actions by remote control. One example of this is the selection of remote banks. If you have a Yamaha DSP Factory card installed (Windows version only), this will also appear as an option on the Device pop-up menu.
Channel/ Category	This is where you select the channel to be controlled or, if the "Command" Device option is selected, the Command category.
Value/Action	Clicking in this column pulls down a pop-up menu, allowing you to select the parameter of the channel to be controlled (typically, if the "VST Mixer" Device option is selected you can choose between volume, pan, send levels, EQ, etc.). If the "Command" Device option is selected, this is where you specify the "Action" of the category.
Flags	Clicking in this column pulls down a pop-up menu, allowing you to activate or deactivate three flags: <ul style="list-style-type: none">• Push Button – When activated, the parameter is only changed if the received MIDI message shows a value unequal to 0.• Toggle – When activated, the parameter value is switched between minimum and maximum value each time a MIDI message is received. The combination of Push Button and Toggle is useful for remote controls which do not latch the state of a button. One example is controlling mute status with a device on which pressing the Mute button turns it on, and releasing the Mute button turns it off. If Push Button and Toggle are activated, the Mute status will change between on and off whenever the button is pressed on the console.• Not Automated – When activated, the parameter will not be automated.

- 9.** If needed, select another bank and make settings for this.

Note that you only need to make settings in the lower table for this – the upper table is already set up according to the MIDI remote device.

- If you need, you can add banks by clicking the Add button below the Bank pop-up.

Clicking the Rename button allows you to assign a new name to the currently selected bank, and you can remove an unneeded bank by selecting it and clicking the Delete button.

10. When you are finished, close the Generic Remote Setup window.

Now, you can control the specified Nuendo parameters from the MIDI remote device. To select another bank, use the pop-up menu in the Remote Status window (or use a control on the MIDI remote device, if you have assigned one for this).

Importing and Exporting Remote Setups

The Export button in the upper right corner of the Generic Remote Setup window allows you to export the current setup, including the Control configuration (the upper table) and all banks. The setup is saved as a file (with the Windows file extension “.xml”). Clicking the Import button allows you to import saved Remote Setup files.

- The last imported or exported Remote Setup will automatically be loaded when the program starts or the Generic Remote control is added in the Device Setup dialog.


15

Audio processing and functions


Background

Audio processing in Nuendo can be called “non-destructive”, in the sense that you can always undo changes or revert to the original versions. This is possible because processing affects *audio clips* rather than the actual audio files, and because audio clips can refer to more than one audio file. This is how it works:

1. If you process an event or a selection range, a new audio file is created in the Edits folder, within your project folder.
This new file contains the processed audio, while the original file is unaffected.
2. The processed section of the audio clip (the section corresponding to the event or selection range) is then made to refer to the new, processed audio file.
The other sections of the clip will still refer to the original file.

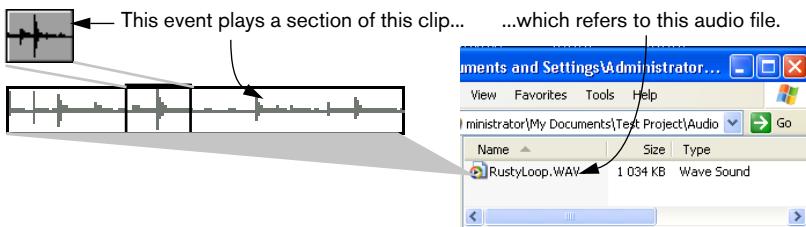

After processing the event...

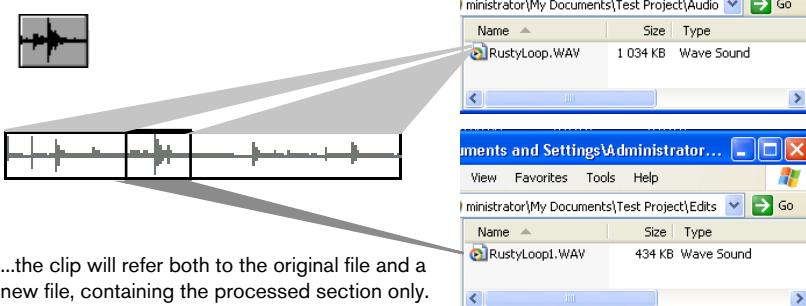

...the clip will refer both to the original file and a new file, containing the processed section only.

- Since all edits are available as separate files, it is possible to undo any processing, at any point and in any order!
This is done in the Offline Process History dialog, as described on [page 354](#).
- Furthermore, the original, unprocessed audio file can still be used by other clips in the project, by other projects or by other applications.

Audio processing

Basically, you apply processing by making a selection and selecting a function from the Process submenu on the Audio menu. Processing is applied according to the following rules:

- Selecting events in the Project window or the Audio Part Editor will apply processing to the selected events only.
Processing will only affect the clip sections that are referenced by the events.
- Selecting an audio clip in the Pool will apply processing to the whole clip.
- Making a selection range will apply processing to the selected range only.
Other sections of the clip are not affected.

If you attempt to process an event that is a shared copy (i.e. the event refers to a clip that is used by other events in the project), you are asked whether you want to create a new version of the clip or not.



Select "New Version" if you want the processing to affect the selected event only.
Select "Continue" if you want the processing to affect all shared copies.

- If you activate the "Do not show this message again" option, any and all further processing you do will conform to the selected method ("Continue" or "New Version").

You can change this setting at any time by using the "On Processing Shared Clips" pop-up menu in the Preferences dialog (Audio page).

Common settings and features

If there are any settings for the selected Audio processing function, these will appear when you select the function from the Process submenu. While most settings are specific for the function, some features and settings work in the same way for several functions:

The “More...” button

If the dialog has a lot of settings, some options may be hidden when the dialog appears. To reveal these, click the “More...” button.



To hide the settings, click the button again (now labeled “Less...”).

The Preview, Process and Cancel buttons

These buttons have the following functionality:


Button	Description
Preview	Allows you to listen to the result of the processing with the current settings. Playback will continue repeatedly until you click the button again (the button is labeled “Stop” during Preview playback). You can make adjustments during Preview playback, but the changes are not applied until the start of the next “lap”. Some changes may automatically restart the Preview playback from the beginning.
Process	Performs the processing and closes the dialog.
Cancel	Closes the dialog without processing.

Pre/post crossfade

Some processing functions allow you to gradually mix the effect in or out. This is done with the pre and post crossfade parameters. If you activate Pre-crossfade and specify a value of e.g. 1000 ms, the processing will be applied gradually from the start of selection, reaching full effect 1000 ms after the start. Similarly, if you activate post-crossfade, the processing will gradually be removed, starting at the specified interval before the end of the selection.

-
- The sum of the pre- and post-crossfade times cannot be larger than the length of the selection.
-

Acoustic Stamp

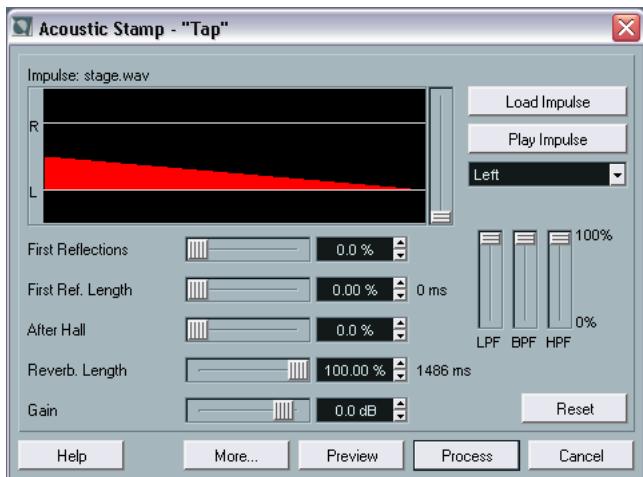

The Acoustic Stamp function is a convolution tool, which allows you to apply room characteristics (reverb) to the audio. This is done by processing the audio signal according to an impulse response – generally a stereo or mono recording of a very short signal (the impulse) in a room or other location. As a result, the processed audio will sound as if it were played in the same location.

-
- This function requires a lot of processing power, especially when using the Preview function. If you are working with long impulse response files or stereo files, you may find that Preview playback stutters or stops. In that case, it's better to process the material, listen to the result and modify it in the Offline Process History (see [page 354](#)) if necessary.
-

The dialog contains the following settings:

Impulse and Envelope display

This display shows the loaded impulse response (in white) and the Envelope (in red). You can zoom in vertically on the impulse response using the slider to the right of the display (this can be useful since impulse responses typically are very weak). Zooming does not affect the processing in any way.

Load Impulse button

Clicking the “Load Impulse” button allows you to load an impulse response file from disk. These are ordinary wave or aiff audio files, with a maximum duration of 12 seconds. The name of the currently loaded impulse response file is shown above the display.

- A number of demonstration impulse response files are included in the Nuendo program folder.

For proper use of the Acoustic Stamp function, we recommend that you acquire files from a professional impulse response library.

Play Impulse button

Plays back the currently loaded impulse response.

Channel selector

If the currently loaded impulse response is a stereo file, this pop-up menu allows you to select whether the left channel, right channel or both (stereo) should be used for the convolution process.

Envelope controls

The five sliders below the display are used for setting up the “reverb envelope”, that is, a gain curve modifying how the impulse response is applied over time, and thereby the reverb character. These settings are reflected in the red Envelope display above. The sliders have the following functionality:

Parameter	Description
First Reflections	A level control for the first section of the reverb (the length of which is set with the next parameter, see below). Usually, this governs the volume of the first reflection(s) of the reverb.
First Ref. Length	This determines the length of the First Reflections section (the level of which is controlled by the previous parameter). Usually you would want to set this so that it includes the first reflection in the impulse response (normally about 5% of the total length).
After Hall	A level control for the end section of the reverb (the section after the First Reflections, see above).
Reverb Length	Governs the reverb time, in milliseconds.
Gain	Allows you to adjust the gain of the impulse response. This may be necessary for optimal results, since different impulse response files may be recorded at different levels.

Filter controls

The three sliders to the right allow you to tailor the tonal character of the processed sound. In essence, this is a graphic equalizer with three broad bands: the LPF slider governs the low frequency content, the BPF governs the midrange and the HPF governs the high frequency content.

- Setting a slider to 100% means that the corresponding filter is “fully open”.

When all three sliders are set to 100%, the processed audio is not filtered at all.

Reset button

Sets all parameters in the upper section of the dialog to their default values.

Wet/Dry Mix

These two sliders allow you to specify the balance between wet (processed) and dry (original) signal in the resulting Clip.

Normally the two sliders are “reverse-ganged”, so that raising the Wet mix slider lowers the Dry mix slider by the same amount. However, if you press [Alt] (Windows) or [Option] (Mac) and drag a slider, you can move it independently. This allows you to set e.g. 80% dry and 80% wet signal. Be careful to avoid distortion.


Tail

This parameter allows you to “add space” after the original audio section, to avoid that the reverb tail is cut off. When the checkbox is activated, you can specify a tail length using the slider. The tail time is included when playing back with the Preview function, allowing you to find the appropriate tail length. A good value would be the Reverb Length value, displayed in ms to the right of the Reverb Length parameter.

Pre- and Post-Crossfade

See [page 330](#).

Envelope

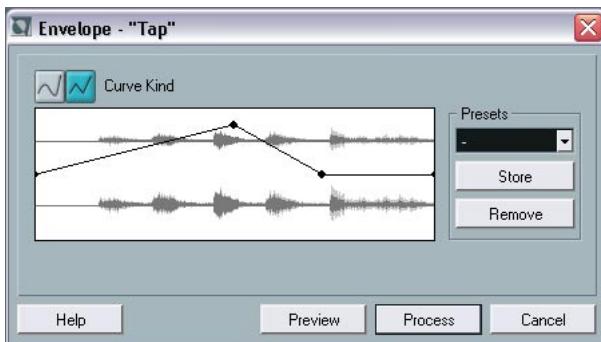

The Envelope function allows you to apply a volume envelope to the selected audio. The dialog contains the following settings:

Curve Kind buttons

These determine whether the envelope curve should consist of spline curve segments (left button) or linear segments (right button).

Fade display

Shows the shape of the envelope curve. The resulting waveform shape is shown in dark grey, with the current waveform shape in light grey. You can click on the curve to add points, and click and drag existing points to change the shape. To remove a point from the curve, drag it outside the display.

Presets


If you have set up an envelope curve that you may want to apply to other events or clips, you can store it as a Preset by clicking the Store button.

- To apply a stored Preset, select it from the pop-up menu.
- To rename the selected Preset, double click on the name and type a new one in the dialog that appears.
- To remove a stored Preset, select it from the pop-up menu and click Remove.

Fade In and Fade Out

These functions are described in the chapter “[Fades and crossfades](#)” (see [page 162](#)).

Gain

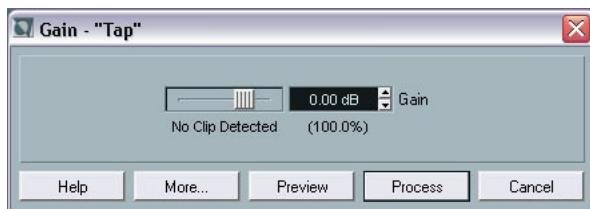

Allows you to change the gain (level) of the selected audio. The dialog contains the following settings:

Gain

This is where you set the desired gain, between -50 and +20dB. The setting is also indicated below the Gain display as a percentage.

Clip detection text

If you use the Preview function before applying the processing, the text below the slider indicates whether the current settings result in clipping (audio levels above 0 dB). If that is the case, lower the Gain value and use the Preview function again.

- If you want to increase the level of the audio as much as possible without causing clipping, you should use the Normalize function instead (see [page 338](#)).

Pre- and Post-Crossfade

See [page 330](#).

Merge Clipboard



This function mixes the audio from the clipboard into the audio selected for processing, starting at the beginning of the selection.

-
- For this function to be available, you need to have Cut or Copied a range of audio in the Sample Editor first.
-

The dialog contains the following settings:


Sources mix

Allows you to specify a mix ratio between the Original (the audio selected for processing) and the Copy (the audio on the clipboard).

Pre- and Post-Crossfade

See [page 330](#).

Noise Gate

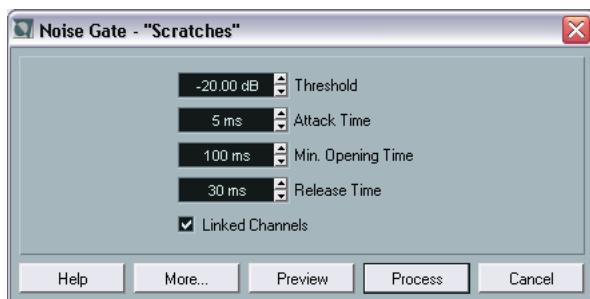

Scans the audio for sections weaker than a specified threshold level, and replaces them with silence. The dialog contains the following settings:

Threshold

The level below which you want audio to be silenced. Levels below this value will close the gate.

Attack Time

The time it takes for the gate to open fully after the audio level has exceeded the threshold level.

Min. Opening Time

This is the shortest time the gate will remain open. If you find that the gate opens and closes too often when processing material that varies rapidly in level, you should try raising this value.

Release Time

The time it takes for the gate to close fully after the audio level has dropped below the threshold level.

Linked Channels

This is available for stereo audio only. When it is activated, the Noise Gate is opened for both channels as soon as one or both channels exceed the Threshold level. When Linked Channels is deactivated, the Noise Gate works independently for the left and right channel.


Dry/Wet mix

Allows you to specify a mix ratio between "dry" and processed sound.

Pre- and Post-Crossfade

See [page 330](#).

Normalize

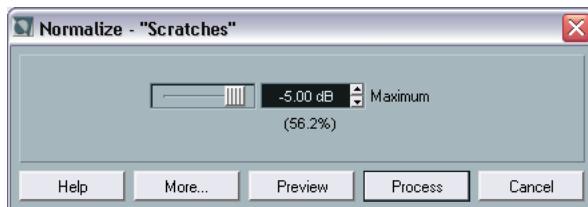

The Normalize function allows you to specify the desired maximum level of the audio. It then analyzes the selected audio and finds the current maximum level. Finally it subtracts the current maximum level from the specified level, and raises the gain of the audio by the resulting amount (if the specified maximum level is lower than the current maximum, the gain will be lowered instead). A common use for Normalizing is to raise the level of audio that was recorded at too low an input level. The dialog contains the following settings:

Maximum

The desired maximum level for the audio, between -50 and 0dB. The setting is also indicated below the Gain display as a percentage.

Pre- and Post-Crossfade

See [page 330](#).

Phase Reverse

Reverses the phase of the selected audio, turning the waveform “up-side down”. The dialog contains the following settings:


Phase Reverse on

When processing stereo audio, this pop-up menu allows you to specify which channel(s) should be phase reversed.

Pre- and Post-Crossfade

See [page 330](#).

Pitch Shift

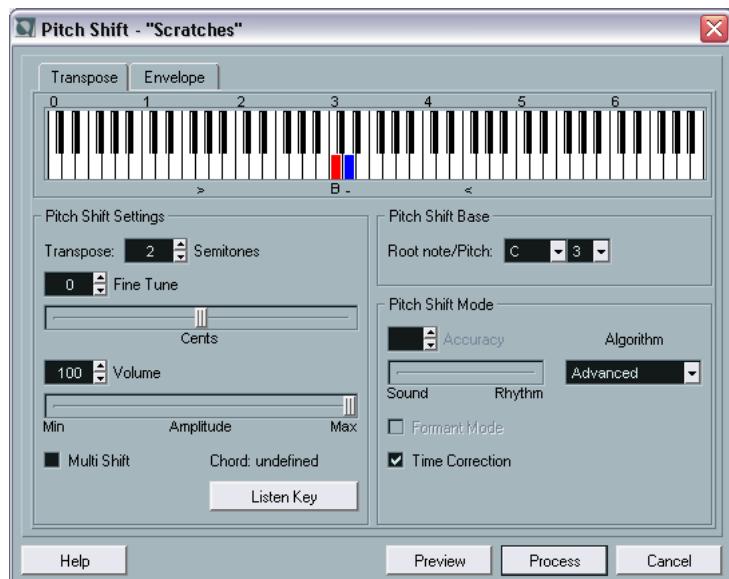

This function allows you to change the pitch of the audio with or without affecting its length. You can also create “harmonies” by specifying several pitches, or apply pitch shift based on a user specified envelope curve.

When the “Transpose” tab is selected, the dialog contains the following parameters:

Keyboard display

This offers a way to specify the transpose interval in semitones, and gives a graphic overview of the transposition setting.

- The “root note” is indicated in red.

This has nothing to do with the actual key or pitch of the original audio, it just provides a way to display transpose intervals. If you like, you can change the root note by using the settings to the right below the keyboard display, or by pressing [Alt]/[Option] and clicking in the keyboard display.

- To specify a transpose interval, click on one of the keys.
The key is indicated in blue, and the program plays test tones in the base pitch and transpose pitch, to give you an audible confirmation.
- If “Multi Shift” is activated (see below), you can click on several keys to create “chords”.
Clicking on a blue (activated) key removes it.

Transpose settings

The “Semitones” and “Fine tune” settings allow you to specify the amount of pitch shift. You can transpose the audio ± 16 semitones, and fine tune it by ± 200 cents (hundredths of semitones).

Volume

Allows you to lower the volume of the pitch shifted sound.

Multi Shift

When this is activated, you can add more than one transpose value, creating multi-part harmonies. This is done by adding intervals in the keyboard display, as described above.

- If the intervals you add make up a standard chord, this chord is displayed to the right.
Note however, that to include the base pitch (the original, untransposed sound) in the processed result, you need to click the base key in the keyboard display as well, so that it is displayed in blue.

Listen Key/Chord button

Clicking this button plays a test tone, pitched according to the activated interval key on the keyboard display. If “Multi Shift” is activated, this button is called “Listen Chord”, and plays all activated intervals, as a chord.

Pitch Shift Base

This allows you to set the root note (the red key in the keyboard display). This has no actual relation to the pitch of the audio material, but should be viewed as an aid for easily setting up intervals and chords.

Accuracy

Set this parameter according to whether the rhythmic feel of the audio material has a high priority or not. If you set this to a high value (drag the slider to the right), the timing and rhythmic feel will be preserved as accurately as possible. If you set it to a low value, the tonal quality gets priority, allowing slight changes in timing. This parameter is not available if the MPEX algorithm is used.

Algorithm

Allows you to select one of four pitch shift algorithms: Mode 1, Mode2, Advanced and MPEX (see below). The resulting audio quality is progressively higher, and the processing time longer from Mode 1 through to MPEX. Mode 1 and 2 are quicker and give lower audio quality while Advanced and MPEX are slower and give higher audio quality.

- **About the MPEX mode:**

This mode is based on Prosoniq's proprietary MPEX (Minimum Perceived Loss Time Compression/Expansion) algorithm. This algorithm (which is also used in Prosoniq's TimeFactory™ application) uses an artificial neural network for time series prediction in the scale space domain to achieve high end time and pitch scaling. This gives the best possible audio quality result.

Note that the Accuracy parameter isn't available in MPEX mode. Furthermore, you should not use the Preview function in MPEX mode, since the MPEX algorithm isn't designed for real time processing.


Formant Mode

If you are processing vocal material, you should activate this option in order to preserve the vocal characteristics of the pitch shifted audio.

Time Correction

When this is activated, the pitch shift process will not affect the length of the audio. When this is deactivated, raising the pitch will shorten the audio section and vice versa, much like changing the playback speed on a tape recorder.

Using envelope based Pitch Shift

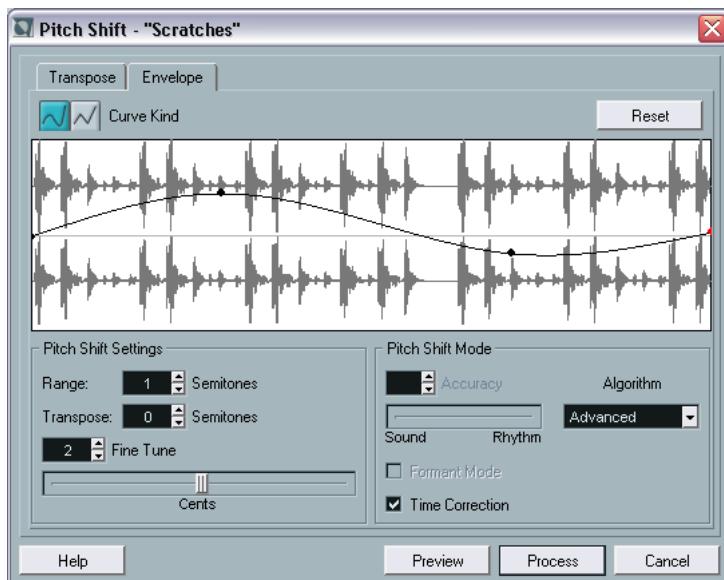

When the “Envelope” tab is selected, you can specify an envelope curve on which the pitch shift should be based. This allows you to create pitch bend effects, pitch shift different sections of the audio by different amounts, etc.


Envelope display

Shows the shape of the envelope curve, over the waveform image of the audio selected for processing. Envelope curve points above the center line indicate positive pitch shift, while curve points below the center line indicate negative pitch shift. Initially, the envelope curve will be a horizontal, centered line, indicating zero pitch shift.


- You can click on the curve to add points, and click and drag existing points to change the shape. To remove a point from the curve, drag it outside the display.

Curve Kind

These buttons determine whether the envelope curve should consist of spline curve segments (left button) or linear segments (right button).

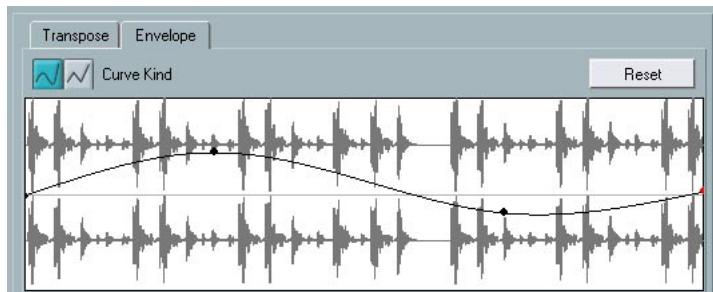

Spline curve segment envelope.

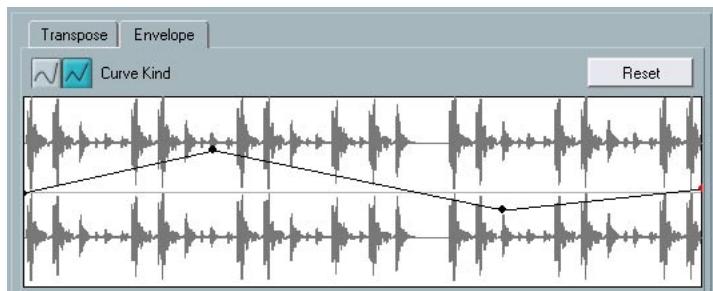

The same envelope with linear segments selected.

Range

This parameter determines the vertical pitch range of the envelope. If set to "4", moving a curve point to the top of the display corresponds to pitch shifting by + 4 semitones. The maximum range is +/- 16 Semitones.

Transpose and Fine Tune

Allows you to adjust the value of a curve point numerically:

1. Click on a curve point to select it.
The selected point is shown in red.
2. Adjust the Transpose and Fine Tune parameters to change the pitch of the curve point in semitones and cents, respectively.

Pitch Shift Mode

These are the same parameters as on the Transpose tab, see [page 341](#).

Example

Let's say that you wish to create a pitch bend effect, so that the pitch is raised linearly by exactly 2 semitones in a specific part of the selected audio.

1. Remove all curve points by clicking the Reset button.
2. Select a linear curve by clicking the right Curve Kind button.
3. Create a point where you want the pitch bend to start by clicking on the envelope line.
Since this is the starting point for the pitch bend, you want its pitch to be zero (the envelope line should still be straight). If necessary, use the Fine Tune parameter to set the curve point to 0 cents, because this point governs the start point, where you want the pitch transition to begin.
4. Create a new curve point at the horizontal position where you want the pitch bend to reach the full value.
This curve point determines the rise time of the pitch bend effect, i.e. the further away from the starting point the new point is positioned, the longer it will take for the pitch bend to reach the full value, and vice versa.

5. Make sure the Range parameter is set to 2 semitones or higher.

6. With the second point still selected, use the Transpose and Fine Tune parameters to set the pitch to exactly 2 semitones.
 7. Create a new curve point to set the duration of the pitch bend, i.e. the time the pitch should remain transposed by 2 semitones.
 8. Finally, create a point where you want the pitch bend to end. You don't need to create a new point if this should be the end of the audio file being processed. There is always an end point at the right side of the waveform display.
 9. If necessary, make additional settings in the Pitch Shift Mode section.
- 10. Click Process.**

The pitch bend is applied according to the specified settings.


Remove DC Offset

This function will remove any DC offset in the audio selection. A DC offset is when there is too large a DC (direct current) component in the signal, sometimes visible as the signal not being visually centered around the “zero level axis”. DC offsets do not affect what you actually hear, but they affect zero crossing detection and certain processing, and it is recommended that you remove them.

-
- It is recommended that this function is applied to complete audio clips, since the DC offset (if any) is normally present throughout the entire recording.**
-

There are no parameters for this function. Note that you can check for DC Offset in an audio clip using the Statistics function (see [page 366](#)).

Resample

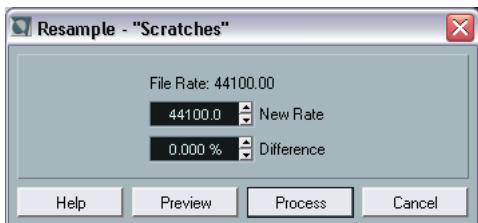

The Resample function can be used for changing the length, tempo and pitch of an event.

The original sample rate of the event is listed in the dialog. Resample the event to a higher or lower sample rate by either specifying a sample rate or by specifying the difference (in percentages) between the original sample rate and the desired new one.

- Resampling to a higher sample rate will make the event longer and cause the audio to play back at a slower speed with a lower pitch.
- Resampling to a lower sample rate will make the event shorter and cause the audio to play back at a faster speed with a higher pitch.
- You can audition the result of the resampling by entering the desired value and clicking "Preview".
The event will then be played back as it will sound after the resampling.
- When you are satisfied with the preview result, click "Process" to close the dialog and apply the processing.

Reverse

Reverses the audio selection, as when playing a tape backwards.
There are no parameters for this function.

Silence

Replaces the selection with silence. There are no parameters for this function.

Stereo Flip



This function works with stereo audio selections only. It allows you to manipulate the left and right channel in various ways. The dialog contains the following parameters:


Mode



This pop-up menu determines what the function does:

Option	Description
Flip Left-Right	Swaps the left and right channel.
Left to Stereo	Copies the left channel sound to the right channel.
Right to Stereo	Copies the right channel sound to the left channel.
Merge	Merges both channels on each side, for mono sound.
Subtract	Subtracts the left channel information from the right and vice versa. This is typically used as a "Karaoke effect", for removing centered mono material from a stereo signal.

Time Stretch

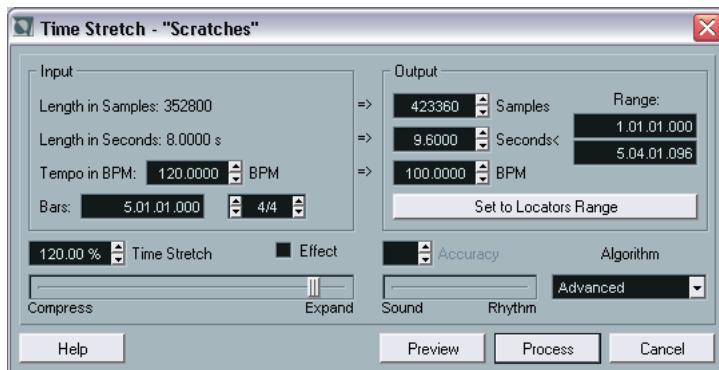

This function allows you to change the length and “tempo” of the selected audio, without affecting the pitch. The dialog contains the following parameters:

Input section

This section contains information and settings regarding the “input”, the audio selected for processing:

Parameter	Description
Length in Samples	The length of the selected audio, in samples.
Length in Seconds	The length of the selected audio, in seconds.
Tempo in BPM	If you are processing music, and know the actual tempo of the audio, you can enter it here as beats per minute. This makes it possible to time stretch the audio to another tempo, without having to compute the actual time stretch amount.
Bars	If you use the tempo setting, you need to specify the length of the selected audio here, as bars, beats, 1/16-notes and ticks (with 120 ticks per 1/16-note).
Time Signature	If you use the tempo setting, you need to specify the time signature here.

Output section

These settings are used if you want to stretch the audio to fit within a specific time span or tempo. The values will change automatically if you adjust the Timestretch amount (see below).

Parameter	Description
Samples	The desired length in samples.
Seconds	The desired length in seconds.
BPM	The desired tempo (beats per minute). For this to work, you have to know the actual tempo of the audio, and specify this (along with time signature and length in bars) in the Input section to the left.
Range	Allows you to specify the desired length as a range between two time positions.
Set to Locators Range	Clicking this button sets the Range values to the length of the Cycle.

Timestretch

The Timestretch parameter determines the amount of timestretch, as a percentage of the original length. If you use the settings in the Output section to specify the amount of timestretch, this value will change automatically.

The possible timestretch range depends on the “Effect” option:

- If the “Effect” checkbox is deactivated, the range is 75-125%. This is the preferred mode if you want to preserve the character of the sound.
- If the “Effect” checkbox is activated, you can specify values between 10 and 1000%. This mode is mainly useful for special effects, etc.

Accuracy

Set this parameter according to whether the rhythmic feel of the audio material has a high priority or not. If you set this to a high value (drag the slider to the right), the timing and rhythmic feel will be preserved as accurately as possible. If you set it to a low value, the tonal quality gets priority, allowing slight changes in timing. This parameter is not available if the MPEX algorithm is used.

Algorithm

Allows you to select one of five time stretch algorithms: Mode 1, Mode 2, Advanced, MPEX and Drum mode. The resulting audio quality is progressively higher, and the processing time longer from Mode 1 through to MPEX. Mode 1 and 2 are quicker and give lower audio quality while Advanced and MPEX are slower and give higher audio quality.

- **About the MPEX algorithm:**

This mode is based on Prosoniq's proprietary MPEX (Minimum Perceived Loss Time Compression/Expansion) algorithm. This algorithm (which is also used in Prosoniq's TimeFactory™ application) uses an artificial neural network for time series prediction in the scale space domain to achieve high end time and pitch scaling. This gives the best possible audio quality result.

Note that the Accuracy parameter isn't available in MPEX mode. Furthermore, you should not use the Preview function in MPEX mode, since the MPEX algorithm isn't designed for real time processing.

- **Drum mode:**

This is a special algorithm developed by Spectral Design, optimized for processing rhythmic material. The Accuracy parameter and Preview function are not available in Drum mode.

Applying plug-ins


As described in the chapter “[Audio effects](#)”, you can add plug-in effects in real-time during playback. However, sometimes it’s useful to “permanently” apply effects processing to one or several selected events. This is done in the following way:

1. Make a selection in the Project window, the Pool or an editor.
Effects are applied according to the same rules as Processing (see [page 330](#)).
2. Select “Plug-ins” from the Audio menu.
3. Select the desired effect from the submenu that appears.
The Process Plug-in dialog appears.

About stereo and mono

If you are applying an effect to mono audio material, only the left side of the effect’s stereo output will be applied.

The process plug-in dialog

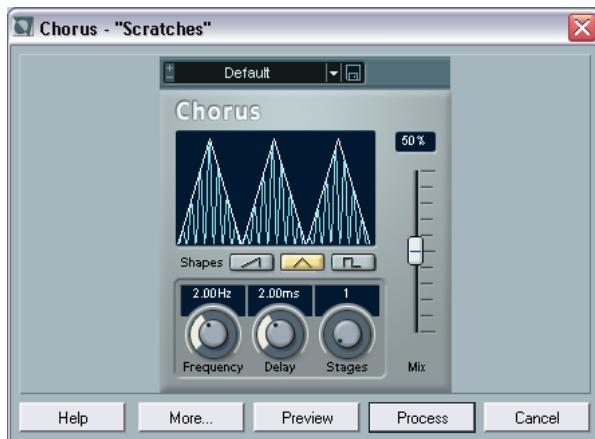

The process plug-in dialog for the Chorus effect.

The upper section of the process plug-in dialog contains the actual effect parameters of the selected plug-in. For details on the included plug-ins’ parameters, see the separate “[Audio Effects and VST Instruments](#)” pdf document.

The lower section of the dialog contains settings for the actual processing. These are common to all plug-ins.

- If the lower section is hidden, click the “More...” button to display it. Clicking the button again (now labeled “Less...”) will hide the lower section.

The following settings and functions are available in the common, lower section of the dialog:

Wet mix/Dry mix

These two sliders allow you to specify the balance between wet (processed) and dry (original) signal in the resulting clip.

Normally the two sliders are “reverse-ganged”, so that raising the Wet mix slider lowers the Dry mix slider by the same amount. However, if you press [Alt]/[Option] and drag a slider, you can move it independently. This allows you to set e.g. 80% dry and 80% wet signal. Be careful to avoid distortion.

Tail

This parameter is useful if you are applying an effect that adds material after the end of original audio (such as reverb and delay effects). When the checkbox is activated, you can specify a tail length using the slider. The tail time is included when playing back with the Preview function, allowing you to find the appropriate tail length.

Pre/Post Crossfade

These settings allow you to gradually mix the effect in or out. If you activate Pre-Crossfade and specify a value of e.g. 1000 ms, the effect will be applied gradually from the start of selection, reaching full effect 1000 ms after the start. Similarly, if you activate Post-Crossfade, the processing will gradually be removed starting at the specified interval before the end of the selection.

-
- The sum of the Pre- and Post-Crossfade times cannot be larger than the length of the selection.
-

Preview button

Allows you to listen to the result of the processing with the current settings. Playback will continue repeatedly until you click the button again (the button is labeled “Stop” during Preview playback). You can change the effect settings during Preview playback if needed.

Process button

Applies the effect and closes the dialog.

Cancel button

Closes the dialog without applying the effect.

The Offline Process History dialog


Procedures

If you find you want to remove some or all processing from a clip, this can be done in the Offline Process History dialog. Processing that can be modified in the Offline Process History dialog includes the functions on the Process menu, any applied plug-in effects, and Sample Editor operations such as Cut, Paste, Delete and drawing with the Pencil tool.

-
- Due to the clip-file relationship (see [page 328](#)), it is even possible to modify or remove some processing “in the middle” of the Process History, while keeping later processing! This feature depends on the type of processing performed (see [page 355](#)).
-

Proceed as follows:

1. Select the clip in the Pool or one of its events in the Project window. You can see which clips have been processed by checking the Status column in the Pool – the waveform symbol indicates that processing or effects have been applied to the clip (see [page 355](#)).
2. Select “Offline Process History...” from the Audio menu. The Offline Process History dialog appears.

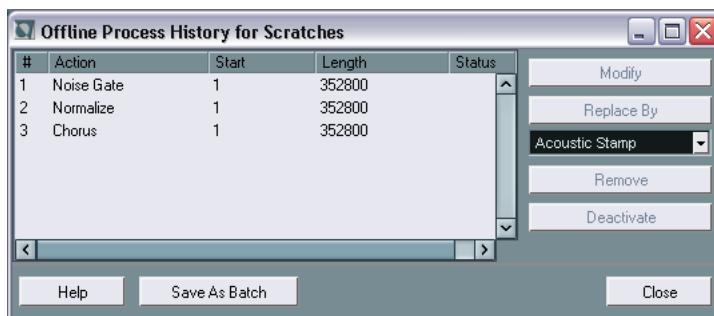

The left part of the dialog contains a list of all processing you have added to the clip, with the most recent operations at the bottom of the list. The “Start” and “Length” columns indicate which section of the clip was affected by each operation. The “Status” column indicates if the operation can be modified or removed.

3. Locate the operation you want to edit and select it by clicking on it in the list.
 - To modify the settings of the selected processing, click the “Modify” button.
This opens the dialog for the processing function or applied effect, allowing you to change the settings. This works just as when you applied the processing or effect the first time.
 - To replace the selected operation with another processing function or effect, select the desired function from the pop-up menu and click the “Replace By” button.
If the selected function has settings, a dialog will appear as usual. The original operation will then be removed and the new processing will be inserted in the Offline Process History.
 - To remove the selected operation, click the “Remove” button.
The processing is removed from the clip.
 - To undo the selected operation and remove the processing from the clip click the “Deactivate” button.
The processing is removed from the clip, but the operation remains in the list. To redo the operation and apply the processing again, click the button, now renamed to “Activate”, again.
 - To save the list of processing operations as a Batch Process, click the “Save As Batch” button.
See [page 356](#) for information about Batch Processing.
4. Click “Close” to close the dialog.

Restrictions

- If there are no settings for the processing function, you can't modify it.
- If you have applied processing that changes the length of the clip (such as Cut, Insert or Time Stretch), you can only remove this if it is the most recent processing in the Offline Process History (at the bottom of the list in the dialog). If an operation can not be removed or modified, this is indicated by an icon in the “Status” column. Also, the corresponding buttons will be greyed out.
- The list must contain at least two processing operations in order to be saved as a Batch Process (see [page 356](#)).

Batch Processing

Nuendo features a Batch Processing function that lets you apply a chain of audio processing to one or several events in one go – in either the Project window or the Pool. Batch Processing is based on operations in the Offline Process History dialog, described above. That is, the list of applied processes in this dialog is what can be made to constitute a batch process.

Batch Processing is therefore a convenient way to apply the same effects with the same settings to several audio events in a project.

It can also be used to “store” effect settings for future use. You may for example have performed a series of elaborate audio processing with a good result, and want to retain the particular combination and settings of effects you applied, so that you may quickly and easily apply them again to other events in the future.

To set up a batch process, proceed as follows:

1. Apply the desired processing to an audio event or selection range in the project.

Note that you must apply at least two audio processes in order to set up a batch process.

From here, there are two ways to go:

2. Pull down the Audio menu, and from the Batch Processes submenu, select “Create from Process History...”.
3. In the dialog that appears, type in a name for the batch process, and click OK.



or...


4. Pull down the Audio menu and select “Offline Process History”.
The Offline Process History dialog opens. In this dialog you can modify settings or remove operations as desired (see page 354).

- In the Process History Dialog, click “Save As Batch”, and then type in a name for the batch process in the dialog that appears and click OK.

Regardless of which of the above two methods you use, the batch process is now saved and available for use:

- In the Project window, select all the audio events you want to process. You can also make a selection range that spans multiple tracks and batch process the selection for all the audio events.

- Pull down the Audio menu and open the Batch Processes submenu. At the top of the menu you can now find the name of the batch process you created. The menu will list the names of any batch processes you create, until you delete them (see below).

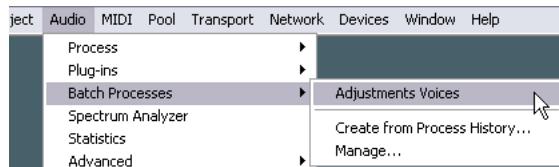


- Select the batch process you want to apply from the menu.

All the selected events will now be processed accordingly.

- Note that even if you clear the Offline Process History dialog of all the operations that make up a batch process, this will not affect the saved batch process. It will still contain and perform the operations on which it was based when created.

Managing Batch Processes

You can delete and rename created batch processes by selecting “Manage...” from the Batch Processes submenu on the Audio menu.

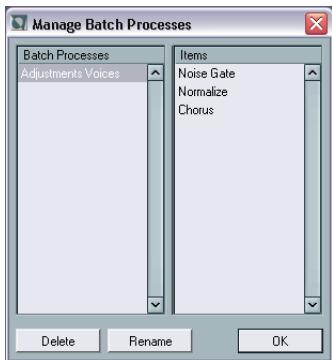

In the dialog that appears, the created batch processes are listed in the left column, and the operations each batch process contains are listed in the right column.

If you want to remove a batch process or change its name, just select it in the list and click “Delete” or “Rename”.

Freeze Edits


The Freeze Edits function on the Audio menu allows you to make all processing and applied effects permanent for a clip:

1. Select the clip in the Pool or one of its events in the Project window.
2. Select “Freeze Edits...” from the Audio menu.
 - If there is only one edit version of the clip (no other clips refer to the same audio file), the following dialog will appear:



If you select “Replace”, all edits will be applied to the original audio file (the one listed in the clip’s Path column in the Pool). If you select “New File”, the Freeze Edits operation will create a new file in the Audio folder within the project folder (leaving the original audio file unaffected).

- If the selected clip (or the clip played by the selected event) has several edit versions (i.e. there are other clips referring to the same audio file), the following alert will appear:

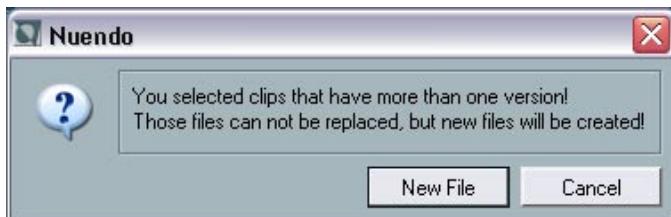

As you can see, you don’t have the option to Replace the original audio file in this case. This is because that audio file is used by other clips. Select “New File” to have a new file created in the Audio folder within the project folder.

-
- Now, the clip refers to a new, single audio file. If you open the Offline Process History dialog for the clip, the list will be empty.
-

Detect Silence


The Detect Silence function on the Audio menu isn't really a processing function, since it doesn't actually affect the audio clip. Instead, it searches for silent sections in an event, and either splits the event, removing the silent parts from the project, or creates regions corresponding to the non-silent sections. Proceed as follows:

1. Select the event in the Project window or the Audio Part Editor.

You can select several events if you like, in which case you will be allowed to make separate settings for each selected event.

2. Select "Detect Silence" from the Audio menu.

The Detect Silence dialog appears.

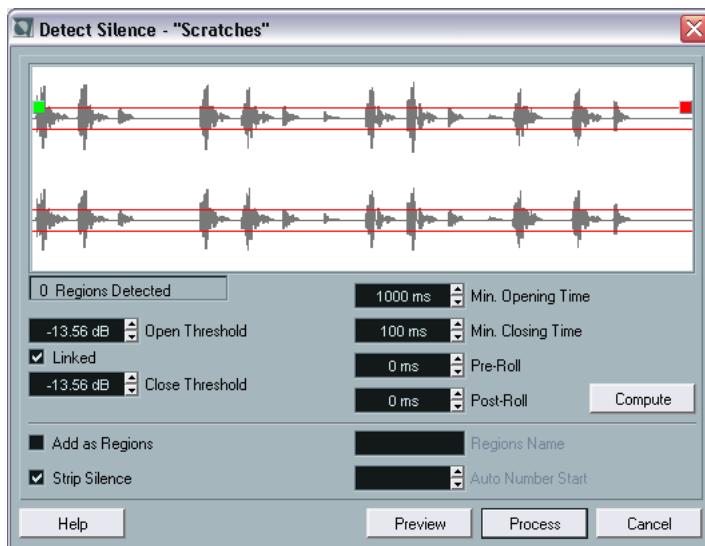


3. Adjust the settings in the area below the waveform display.

They have the following functionality:

Setting	Description
Open Threshold	When the audio level exceeds this value, the function will "open", i.e. let the sound through. Set this low enough to open when a sound starts, but high enough to remove unwanted noise during "silent" sections.
Close Threshold	When the audio level drops below this value, the function will "close". This value cannot be higher than the Open Threshold value. Set this high enough to remove unwanted noise during "silent" sections.
Linked	If this checkbox is ticked, Open and Close Threshold will have the same value.
Min. Opening Time	Determines the minimum time that the function will remain "open" after the audio level has exceeded the Open Threshold value. If the audio contains repeated short sounds, and you find that this results in too many short "open" sections, try raising this value.
Min. Closing Time	Determines the minimum time that the function will remain "closed" after the audio level has dropped below the Close Threshold value. Usually you would want to set this to a low value, to avoid removing sounds.
Pre-Roll	Allows you to have the function "open" slightly before the audio level exceeds the Open Threshold value. In other words, the start of each "open" section is moved to the left according to the time you set here. This is useful to avoid removing the attack of sounds.
Post-Roll	Allows you to have the function "close" slightly after the audio level drops below the Close Threshold value. This is useful to avoid removing the natural decay of sounds.


4. Click the “Compute” button.

The audio event is analyzed, and the waveform display is redrawn to indicate which sections will be considered “silent”, according to your settings.

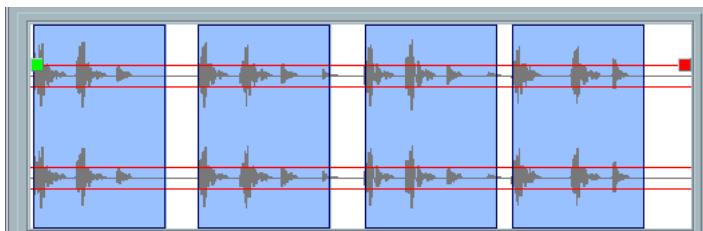

- If you like, you can use the Preview function to listen to the result. The event is played back repeatedly in its entire length, but with the “closed” sections silenced.
- 5. Repeat steps 3 and 4 until you are satisfied with the result.**
- 6. Select what you want the function to do, by activating either the “Add as Regions” checkbox, the “Strip Silence” checkbox, or both.**
“Add as Regions” will create regions according to the non-silent sections. “Strip Silence” will split the event at the start and end of each non-silent section, and remove the silent sections in between.
- 7. If you activated “Add as Regions”, you can specify a name for the Regions in the Regions Name field.**
In addition to the name, the regions will be numbered, starting with the number specified in the Auto Number Start field.
- 8. Click “Process”.**

The event is split and/or regions are added.

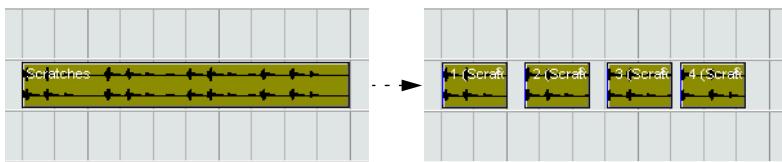

The result of the “Strip Silence” option.


- If you selected more than one event in step 1 above, the dialog will appear again, allowing you to make separate settings for each selected event.

The Spectrum Analyzer

This function analyzes the selected audio, computes the average “spectrum” (level distribution over the frequency range) and displays this as a two-dimensional graph, with frequency on the x-axis and level on the y-axis.

1. Make an audio selection (a clip, an event or a range selection).
2. Select “Spectrum Analyzer” from the Audio menu.

A dialog with settings for the analysis appears.

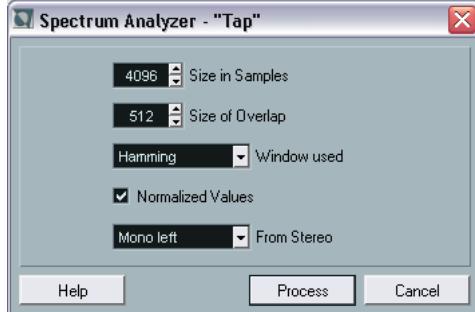


The default values are chosen to give good results in most situations, but you can adjust the settings if you like:

Setting	Description
Size in Samples	The function divides the audio into “analysis blocks”, the size of which is set here. The larger this value, the higher the frequency resolution of the resulting spectrum.
Size of Overlap	The overlap between each analysis block.
Window used	Allows you to select which window type should be used for the FFT (Fast Fourier Transform, the mathematical method used for computing the spectrum).
Normalized values	When this is activated, the resulting level values are scaled, so that the highest level is displayed as “1” (0 dB).
From Stereo	When analyzing stereo material, there is a pop-up menu with the following options: Mono mix – the stereo signal is mixed to mono before analyzing. Mono left/right – the left or right channel signal is used for analysis. Stereo – both channels are analyzed (two separate spectrums will be displayed).

3. Click the “Process” button.

The spectrum is computed and displayed as a graph.

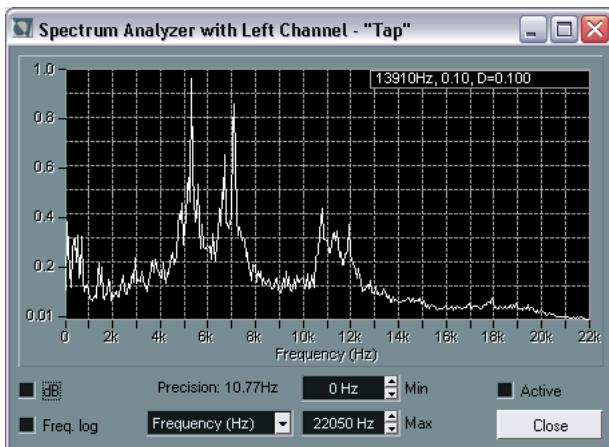

4. You can adjust the display with the settings in the display window:

Setting	Description
dB	When this is activated, the vertical axis shows dB values. When it is deactivated, values between 0 and 1 are shown.
Freq. log	When this is activated, frequencies (on the horizontal axis) are displayed on a logarithmic scale. When it is deactivated, the frequency axis is linear.
Precision	Indicates the frequency resolution of the graph. This value cannot be changed here, but is governed by the Size in Samples setting in the previous dialog.
Frequency/Note	Allows you to select whether you want the frequencies to be displayed in Hertz or with note names.
Min.	Sets the lowest frequency shown in the graph.
Max.	Sets the highest frequency shown in the graph. By adjusting the Min and Max values, you can take a closer look at a smaller frequency range.
Active	When this is activated, the next Spectrum Analysis will appear in the same window. When deactivated, new Spectrum Analysis results will appear in separate windows.

5. If you move the mouse pointer over the graph, a crosshair cursor follows the graph curve and the display in the upper right corner shows the frequency/note and level at the current position.

To compare the level between two frequencies, move the pointer to one of the frequencies, right-click (Win) or [Ctrl]-click (Mac) once and move the pointer to the second frequency. The delta value (the difference in level between the current position and the right/[Ctrl]-click position) is displayed in the upper right corner (labeled "D").


- If you analyzed stereo audio and selected the "Stereo" option in the first dialog, the graphs for the left and right channel are superimposed in the display, with the left channel graph in white and the right channel graph in yellow.

The display in the upper right corner shows the values for the left channel – to see the right channel values, hold down [Shift]. An "L" or "R" is displayed to indicate which channel values are shown.

6. You can leave the window open or close it by clicking the "Close" button.

If you leave it open and the "Active" checkbox is ticked, the result of the next Spectrum Analysis will be displayed in the same window.

Statistics

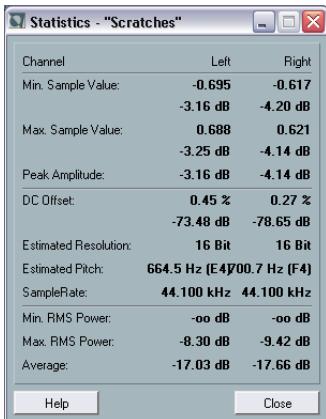

The Statistics function on the Audio menu analyzes the selected audio (events, clips or range selections) and displays a window with the following information:

Item	Description
Min. Sample Value	The lowest sample value in the selection, as a value between -1 and 1 and in dB.
Max. Sample Value	The highest sample value in the selection, as a value between -1 and 1 and in dB.
Peak Amplitude	The largest sample value (in absolute numbers) in the selection, in dB.
DC Offset	The amount of DC Offset (see page 345) in the selection, as a percentage and in dB.
Estimated Resolution	Even though an audio file is in 16 or 24 bits, it may have been converted from a lower resolution. The Estimated Resolution value makes an educated guess about the actual resolution of the audio selection, by computing the smallest level difference between two samples.
Sample Rate	The sample rate of the audio selection.
Min. RMS Power	The lowest loudness (RMS) measured in the selection.
Max. RMS Power	The highest loudness (RMS) measured in the selection.
Average	The average loudness over the whole selection.

16

The Sample Editor

Background

The Sample Editor allows you to view and manipulate audio at the audio clip level, by cutting and pasting, removing or drawing audio data or applying effects. This editing can be called “non-destructive”, in the sense that you can undo changes or revert to the original versions at any point, using the Offline Process History.

For details, see the section about non-destructive processing on [page 328](#) and the description of the Offline Process History on [page 354](#).

Opening the Sample Editor

You open the Sample Editor by double clicking an audio event in the Project window or the Audio Part Editor, or by double clicking an audio clip in the Pool. You can have more than one Sample Editor open at the same time.


- Note that double clicking on an audio part in the Project window will open the Audio Part Editor, even if the part only contains a single audio event.

See [page 390](#).

Window overview




The Elements menu

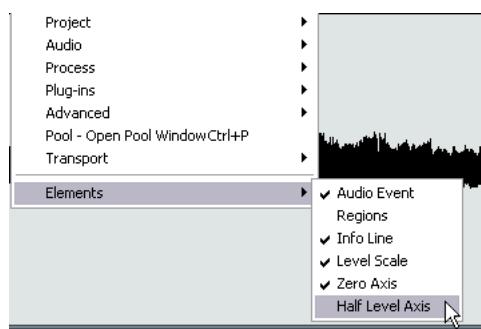

If you Right-click (Win) or [Ctrl]-click (Mac) in the Sample Editor to bring up the Quick menu, you will find a sub menu called “Elements”. By activating or deactivating options on this submenu, you can decide what you want shown in the editor window. Some of these options are also available as icons on the toolbar.

The toolbar

The toolbar contains tools and various settings:

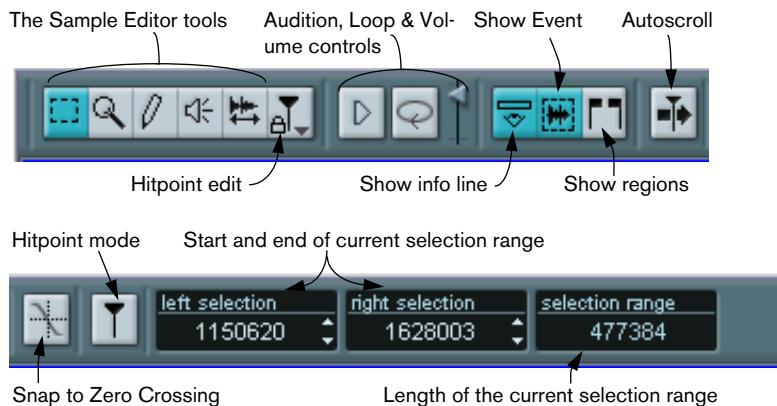

- You can customize the toolbar by right-clicking it (Win) or [Ctrl]-clicking it (Mac) and using the pop-up menu to hide or show items.

Selecting Setup from the pop-up menu allows you to reorder sections on the toolbar, store presets, etc. See [page 712](#).

The thumbnail display




The thumbnail display provides an overview of the whole clip. The section currently shown in the Sample Editor's main waveform display is indicated by a blue rectangle in the thumbnail, while the current selection range is shown in blue-grey.

- You can move the blue rectangle in the thumbnail to view other sections of the clip.
Click in the lower half of the rectangle and drag it to the left or right to move it.
- You can resize the blue rectangle (by dragging its left or right edge) to zoom in or out, horizontally.
- You can define a new viewing area by clicking in the upper half of the overview and dragging a rectangle with the pointer.

The ruler


The Sample Editor ruler is located between the thumbnail and the waveform display. It shows the timeline in the display format specified in the Project Setup dialog (see [page 97](#)). If you like, you can select an independent display format for the ruler by clicking on the arrow button to the right of it and selecting an option from the pop-up menu that appears (this affects the values in the info line too). For a list of the display format options, see [page 94](#).

The waveform display and the level scale

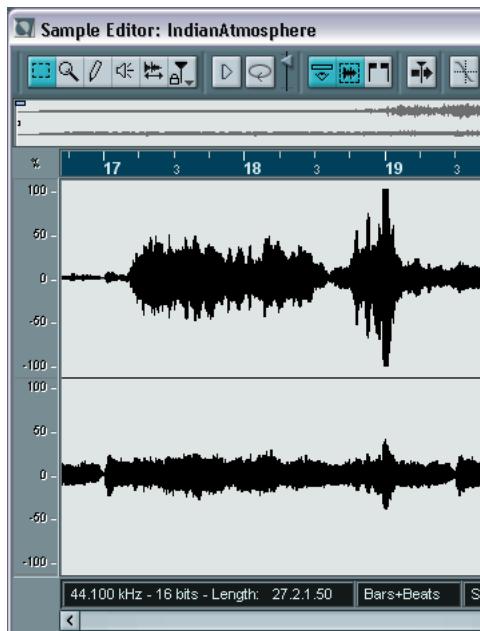


The waveform display shows the waveform image of the edited audio clip – in the style selected in the Preferences dialog (Event Display–Audio page), see [page 103](#). To the left of it, a level scale can be shown, indicating the amplitude of the audio.


- When the level scale is shown, you can select whether the level should be shown as a percentage or in dB. This is done by right-clicking the level scale and selecting an option from the pop-up menu that appears. This also allows you to hide the level scale.

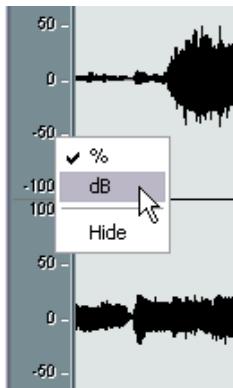

- To display the level scale after hiding it, right-click (Win) or [Ctrl]-click (Mac) to bring up the Quick menu and activate “Level Scale” on the Elements submenu.
This submenu also allows you to select whether you want the zero axis and/or the half level axis indicated in the waveform display.

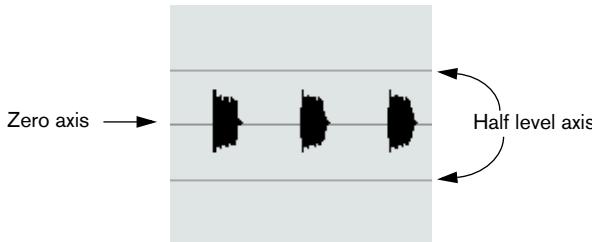

The info line

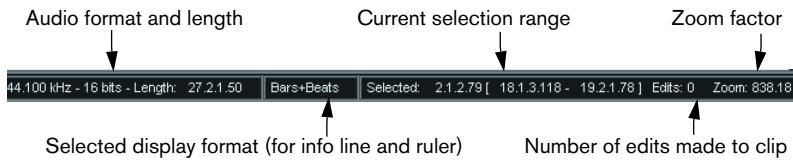

The info line at the bottom of the window shows information about the edited audio clip. You cannot edit the values on the info line.

- To hide or show the info line, click the Show Info button on the toolbar.



- Initially, length and position values are displayed in the format specified in the Project Setup dialog (see [page 97](#)), but you can change this by clicking in the middle field of the info line and selecting another display format from a pop-up menu.

This selection affects the Sample Editor ruler as well.

Operations

Zooming

Zooming in the Sample Editor is done according to the standard zoom procedures, with the following special notes:

- The vertical zoom slider changes the vertical scale relative to the height of the editor window, in a way similar to the waveform zooming in the Project window (see [page 99](#)).
The vertical zoom will also be affected if you drag a rectangle with the Zoom tool and the option “Zoom Tool Standard Mode” (Preferences - Editing dialog) is deactivated.
- The following options relevant to the Sample Editor are available on the Zoom submenu on the Edit menu:

Option	Description
Zoom In	Zooms in one step, centering on the position cursor.
Zoom Out	Zooms out one step, centering on the position cursor.
Zoom Full	Zooms out so that the whole clip is visible in the editor.
Zoom to Selection	Zooms in so that the current selection fills the screen.
Zoom to Event	Zooms in so that the editor shows the section of the clip corresponding to the edited audio event. This is not available if you opened the Sample Editor from the Pool (in which case the whole clip is opened for editing, not an event).

Zoom In/Out Vertical This is the same as using the vertical zoom slider (see above).

- You can also zoom by resizing the rectangle in the thumbnail display. See [page 370](#).
- The current zoom setting is shown in the info line, as a “samples per screen pixel” value.
- Note that you can zoom in horizontally to a scale with less than one sample per pixel!
This is required for drawing with the Pencil tool (see [page 385](#)).
- If you have zoomed in to one sample per pixel or less, the appearance of the samples depend on the option “Interpolate Audio Images” in the Preferences dialog (Event Display–Audio page).
If the option is deactivated, single sample values are drawn as “steps”. If the option is activated they are interpolated to “curves” form.

Auditioning

While you can use the regular play commands to play back audio when the Sample Editor is open, it is often useful to listen to the edited material only. Below are two ways to do this.

- When auditioning, audio will be routed directly to the first output bus, bypassing the audio channel's settings, effects and EQs.
- You can adjust the auditioning level with the miniature level fader on the toolbar.

This does not affect the regular playback level.

By using the Speaker tool

If you click somewhere in the waveform display with the Speaker tool and keep the mouse button pressed, the clip will be played back from the position at which you clicked. Playback will continue until you release the mouse button.

By using the Play icon



Clicking the Play icon on the toolbar plays back the edited audio, according to the following rules:

- If you have made a selection, this selection will be played back.
- If there is no selection, but the option "Show Event" is activated (see [page 386](#)), the section of the clip corresponding to the event will be played back.
- If there is no selection, and "Show Event" is deactivated, the playback will start at the cursor position (if the cursor is outside the display, the whole clip is played back).
- If the Loop icon is activated, playback will continue repeatedly until you deactivate the Play icon. Otherwise, the section will be played back once.
- Note that there is a separate Play button for auditioning Regions. See [page 383](#).

Scrubbing



The Scrub tool allows you to locate positions in the audio by playing back, forwards or backwards, at any speed:


1. Select the Scrub tool.
 2. Click in the waveform display and keep the mouse button pressed.
The project cursor is moved to the position at which you click.
 3. Drag to the left or right.
The project cursor follows the mouse pointer and the audio is played back. The speed and pitch of the playback depends on how fast you move the pointer.
- You can adjust the response of the Scrub tool with the Scrub Response (Speed) setting in the Preferences dialog (VST page).
There you will also find a separate Scrub Volume setting.

Adjusting the snap point

The snap point is a marker within an audio event (or clip – see below). This is used as a reference position when you are moving events with snap activated, so that the snap point is “magnetic” to whatever snap positions you have selected.

By default, the snap point is set at the beginning of the audio event, but often it is useful to move the snap point to a “relevant” position in the event, such as a downbeat, etc.:

1. Activate the “Audio Event” option so that the event is displayed in the editor.
2. Scroll so that the event is visible, and locate the “S” flag in the event. If you haven’t adjusted this previously, it will be located at the beginning of the event.

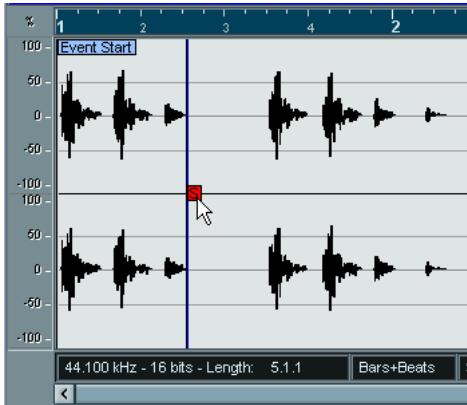

3. Click on the “S” flag and drag it to the desired position.
 - If the Scrub tool is selected when you move the snap point, you will hear the audio while dragging (just like when scrubbing). This makes it easier to find the correct position.
- You can also adjust the snap point by setting the project cursor:
1. Place the cursor at the desired position (intersecting the event). You may want to do this by scrubbing, to spot the right position exactly.
 2. Pull down the Audio menu and select “Snap Point To Cursor”. The snap point will be set to the position of the cursor. This method can also be used in the Project window and the Audio Part Editor.
 - It is also possible to define a snap point for a clip (for which there is no event yet). To open a clip in the Sample Editor, double click it in the Pool (or drag it from the Pool to the Sample Editor). After having set the snap point using the procedure described above, you can insert the clip into the project from the Pool or the Sample Editor, taking the snap point position into account.

Making selections

To select an audio section in the Sample Editor, you click and drag with the Range Selection tool.



- If Snap to Zero Crossing is activated on the toolbar, the start and end of the selection will always be at zero crossings (see [page 387](#)).
- You can resize the selection by dragging its left and right edge or by [Shift]-clicking.
- The current selection is indicated to the right on the toolbar.
You can fine-tune the selection by changing these values numerically. Note that the values are relative to the start of the clip, rather than to the project timeline.

Using the Select submenu

The Select submenu on the Edit menu contains the following selection functions:

Function	Description
All	Selects the whole clip.
None	Selects no audio (the selection length is set to "0").
In Loop	Selects all audio between the left and right locator.
From Start to Cursor	Selects all audio between the clip start and the project cursor.
From Cursor to End	Selects all audio between the project cursor and the end of the clip. For this to work, the project cursor must be within the clip boundaries.
Select Event	Selects the audio that is included in the edited event only. This is not available if you opened the Sample Editor from the Pool (in which case the whole clip is opened for editing, not an event).
Left Selection Side to Cursor	Moves the left side of the current selection range to the project cursor position. For this to work, the cursor must be within the clip boundaries.
Right Selection Side to Cursor	Moves the right side of the current selection range to the project cursor position (or the end of the clip, if the cursor is to the right of the clip).

Editing selection ranges

Selections in the Sample Editor can be manipulated in several ways.
Please note:

- If you attempt to edit an event that is a shared copy (i.e. the event refers to a clip that is used by other events in the project), you are asked whether you want to create a new version of the clip or not (if you haven't made a "permanent" choice already – see below).
Select "New Version" if you want the editing to affect the selected event only. Select "Continue" if you want the editing to affect all shared copies.
Note: If you activate the option "Do not show this message again" in the dialog, any and all further editing you do will conform to the selected method ("Continue" or "New Version"). You can change this setting at any time with the "On Processing Shared Clips" pop-up menu in the Preferences dialog (Audio page).
- Any changes to the clip will appear in the Offline Process History, making it possible to undo them at a later point (see [page 354](#)).

Cut, Copy and Paste


The Cut, Copy and Paste commands on the Edit menu work according to the following rules:

- Selecting Copy copies the selection to the clipboard.
- Selecting Cut removes the selection from the clip and moves it to the clipboard.

The section to the right of the selection is moved to the left to fill out the gap.

- Selecting Paste copies the data on the clipboard into the clip.

If there is a selection in the editor, this will be replaced by the pasted data. If there is no selection (if the selection length is "0"), the pasted data will be inserted starting at the selection line. The section to the right of the line will be moved to make room for the pasted material.

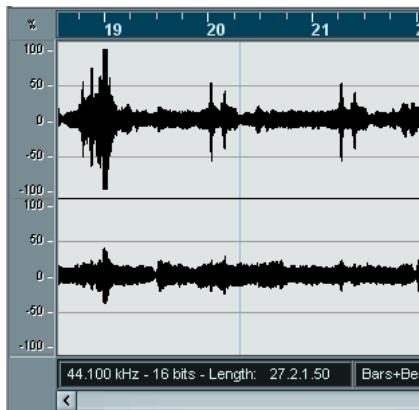

The pasted data will be inserted at the selection line.

Insert Silence

Selecting “Insert Silence” from the Range submenu on the Edit menu will insert a silent section with the same length as the current selection, at the selection start.

- The selection will not be replaced, but moved to the right to make room. If you want to replace the selection, use the “Silence” function instead (see [page 346](#)).

Delete

Selecting Delete from the Edit menu (or pressing [Backspace]) removes the selection from the clip. The section to the right of the selection is moved to the left to fill out the gap.

Processing

The functions on the Process submenu on the Audio menu can be applied to selections in the Sample Editor, as can the effects on the Plug-ins submenu. See the chapter [“Audio processing and functions”](#).

Creating a new event from the selection

You can create a new event that plays only the selected range, using the following method:

1. Make a selection range.
2. Press [Ctrl]/[Command] and drag the selection range to the desired audio track in the Project window.

Creating a new clip or audio file from the selection

You can extract a selection from an event and either create a new clip or a new audio file, in the following way:

1. Make a selection range.
2. Select “Bounce Selection” from the Audio menu.

A new clip is created and added to the Pool, and another Sample Editor window will open with the new clip. The new clip will refer to the same audio file as the original clip, but will only contain the audio corresponding to the selection range.

- You can also use the Bounce Selection function to create new audio files on disk from regions in the Pool – see [page 440](#)

Working with regions


Regions are sections within a clip. One of the main uses for regions is Cycle recording, in which the different “takes” are stored as regions (see [page 54](#)). You can also use this feature for marking important sections in the audio clip. Regions can be dragged into the Project window from the Editor or the Pool, to create new audio events. You can also export a region to disk as a new audio file, from the Pool.

Regions are best created, edited and managed in the Sample Editor:

Creating a region

1. Select the range you want to convert to a region.
2. Click the “Show Regions” icon on the toolbar, or activate the “Regions” option on the Elements submenu on the Quick menu.

The regions list is displayed to the right in the Sample Editor window.

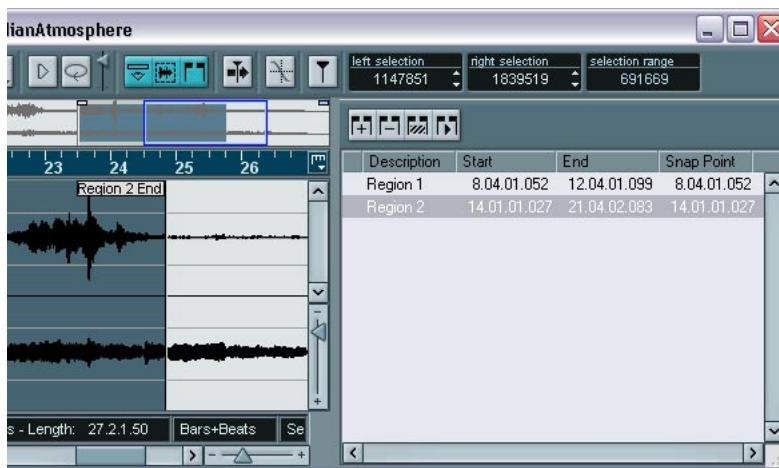

3. Click the Add region button above the Regions list (or select “Create Region(s)” from the Audio menu).
A region is created, corresponding to the selected range.
4. To name the region, click on it in the list and type in a new name.
Regions can be renamed at any time, using this procedure.
 - When a region is selected in the Regions list, it is instantly displayed and selected in the Sample Editor.

Editing regions

The region selected in the list is displayed in grey in the waveform display and thumbnail.



There are two ways to edit the start and end position of a region:

- Click and drag its start and end handles in the waveform display (with any tool).

When you move the pointer over the handles, it will automatically change to an arrow pointer, to indicate that you can drag the handles.

- Edit the Start and End positions numerically in the Regions list.
The positions are shown in the display format selected for the ruler and info line, but are relative to the start of the audio clip, rather than the project timeline.

Auditioning regions

You can listen to a region by selecting it in the list and clicking the Play Region button (above the list). The region will play back once or repeatedly, depending on whether the Loop icon on the toolbar is activated or not.

Making selections from regions

If you select a region in the list and click the Select Region button above, the corresponding section of the audio clip is selected (as if you had selected it with the Range Selection tool). This is useful if you want to apply processing to the region only, etc.

- Note that you can also double click a region in the Pool, to have its audio clip open in the Sample Editor with the area of the region automatically selected.

Creating new events from regions

You can create new audio events from regions, using the following method:

1. Click in the Region's leftmost column in the list and keep the mouse button pressed.
 2. Move the pointer to the desired audio track and position in the Project window.
 3. Release the mouse button.
A new event is created.
- You can also use the function “Events from Regions” for this (see [page 136](#)).

Removing regions

To remove a region from a clip, select it in the list and click the Remove Region button above the list.

Exporting regions as audio files

If you create a region in the Sample Editor, the region can be exported to disk as a new audio file. This is done from the Pool, and is described on [page 440](#).

Drawing in the Sample Editor

It is possible to edit the audio clip at sample level, by drawing with the Pencil tool. This can be useful if you need to manually edit out a spike or click, etc.

1. Zoom in to a zoom value lower than 1.
This means that there is more than one screen pixel per sample.
 2. Select the Pencil tool.
 3. Click and draw at the desired position in the waveform display.
When you release the mouse button, the edited section is automatically selected.
-
- Any changes created by drawing will appear in the Offline Process History, making it possible to undo them at a later stage (see [page 354](#)).

Options and settings

Show audio event

-
- This is only available if you opened the Sample Editor by double clicking on an audio event in the Project window or the Audio Part Editor.
-

When the option “Audio Event” is activated on the Elements submenu on the Quick menu (or the Show Audio Event button is activated on the toolbar), the section corresponding to the edited event is shown with a white background in the waveform display and Thumbnail. The sections of the audio clip that are “outside” the event are shown with a grey background.



- In this mode, you can adjust the start and end of the event in the clip, by dragging the event handles in the waveform display.
When you move the pointer over the event handles (no matter what tool may be selected), it takes on the shape of an arrow, to indicate that you can click and drag.

Snap to Zero Crossing



Snap to Zero Crossing activated.

When this option is activated, all audio edits are done at zero crossings (positions in the audio where the amplitude is zero). This helps you avoid pops and clicks which might otherwise be caused by sudden amplitude changes.

- This setting affects the Sample Editor only. In the Project window and other editors, the Snap to Zero Crossing setting in the Preferences dialog (Editing–Audio page) is used.

Autoscroll



Autoscroll activated.

When this option is activated, the waveform display will scroll during playback, keeping the project cursor visible in the editor.

17

The Audio Part Editor

Background

The Audio Part Editor allows you to view and edit the events inside audio parts. Essentially, this is the same type of editing that you do in the Project window, which means that this chapter contains a lot of references to the chapter “[The Project window](#)”.

Audio parts are created in the Project window, in one of the following ways:

- By selecting one or several audio events on the same track, and selecting “Events to Part” from the Audio menu.
- By gluing together two or more audio events on the same track with the Glue Tube tool.
- By drawing an empty part with the Pencil tool.
- By double clicking between the left and right locator on an audio track. With the last two methods, an empty part is created. You can then add events to the part by pasting, or by using drag and drop from the Pool.

Opening the Audio Part Editor

You open the Audio Part Editor by selecting one or more audio part(s) in the Project window and double clicking on any one of them (or using the Edit-Open key command, by default [Ctrl]/[Command]-[E]).

The Audio Part Editor can display several parts at once, and you can also have more than one Audio Part Editor open at the same time.

- If the part you double click on is a shared copy (i.e. you have previously copied the part by [Alt]/[Option]+[Shift]-dragging), any editing you perform will affect all shared copies of this part.
To indicate that it is a shared copy an “s” is displayed in the upper right corner of the part in the Project window (see [page 119](#)).
- Note that double clicking on an audio event in the Project window will open the Sample Editor (see [page 368](#)).

Window overview



The toolbar

The tools, settings and icons on the toolbar have the same functionality as in the Project window, with the following differences:

- A Solo button (see [page 396](#)).
- Separate tools for audition (Speaker) and scrubbing (see [page 397](#)).
- No Pencil, Glue Tube or Mute tool.
- Play and Loop icons and an Audition Volume control (see [page 396](#)).
- Independent Track Loop settings (see [page 397](#)).
- Part List controls for handling several parts: Activating parts for editing, restricting editing to active parts only and showing part borders (see [page 394](#)).
- **You can customize the toolbar, hiding or reordering its items.**
This is described on [page 712](#).


The ruler and info line

These have the same functionality and appearance as their counterparts in the Project window.

- Note that you can select a separate display format for the Audio Part Editor ruler by clicking on the arrow button on the right and selecting an option from the pop-up menu that appears.
For a list of the available formats, see [page 94](#).

About lanes

If you make the editor window larger, this will reveal additional space below the edited events. This is because an audio part is divided vertically in *lanes*.

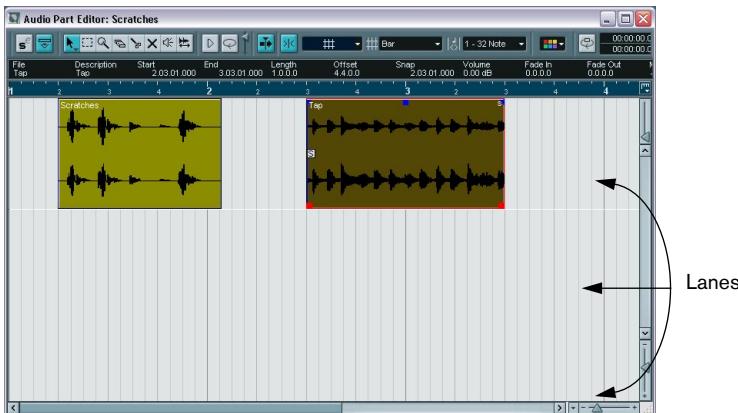

Lanes can make it easier to work with several audio events in a part:



In the left figure it is unnecessarily hard to discern, select and edit the separate events. In the right figure, some of the events have been moved to a lower lane, making selection and editing much easier.

- To move an event to another lane without accidentally moving it horizontally, press [Ctrl]/[Command] and drag it up or down.
This is the default modifier key for this – you can adjust this in the Preferences if you like.


Overlapping events

Only one event per track can be played back at the same time! This means that if you have overlapping events, on the same lane or different lanes, these will cut each other off, according to the following rules:

- For events on the same lane, the ones that are on top (visible) will be played.

To move overlapping events to the front or back, use the Move to Front and Move to Back functions on the Edit menu.

- For events on different lanes, the event on the lowest lane gets playback priority.

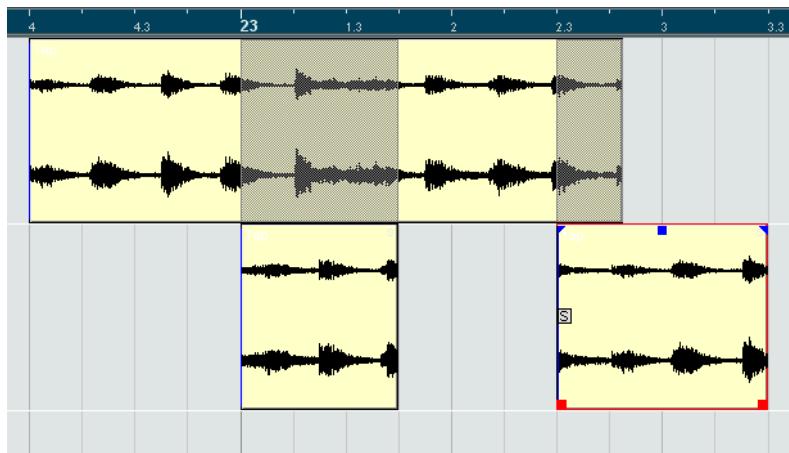

The “greyed-out” sections of the upper event will not be played since the event on the lower lane has playback priority! Note that in the actual program, playback priority between lanes is not indicated by event sections being greyed out.

Handling several parts

When you open the Audio Part Editor with several parts selected – all on the same track or on different tracks – they might not all “fit” in the editor window, which can make it hard to get an overview of the different parts when editing.

Because of this, the toolbar features a few functions to make working with multiple parts easier and more comprehensive:

- The Part List menu lists all parts that were selected when you opened the editor, and lets you select which part should be active for editing. When you select a part from the list, it is automatically made active and centered in the display.



- Note that it is also possible to activate a part by using the Arrow tool and clicking on it.
- The button “Edit Active Part Only” lets you restrict editing operations to the active part only.

If you for example select “All” from the Select submenu on the Edit menu with this option activated, all events in the active part will be selected but not the events in other parts.



“Edit Active Part Only” activated on the toolbar.

- You can zoom in on an active part so that it fills the screen by selecting “Zoom to Event” from the Zoom submenu on the Edit menu.

- The button “Show Part Borders” can be used if you want to see clearly defined borders for the active part.

When this is activated, all parts except the active one are grayed out, making the borders easily discernible. There are also two “markers” in the ruler with the name of the active part, marking its beginning and end. These can be moved freely to change the part borders.



“Show Part Borders” activated on the toolbar.

- It is possible to cycle between parts, making them active, with key commands.

In the Key Commands dialog – Edit category, there are two functions: “Activate Next Part” and “Activate Previous Part”. If you assign key commands to these, you can use them to cycle between parts.

Operations

-
- Zooming, selecting and editing in the Audio Part Editor is done just as in the Project window (see [page 97](#)).
-

Auditioning

There are three ways to listen to the events in the Audio Part Editor:

By using the Speaker tool

If you click somewhere in the editor's event display with the Speaker tool and keep the mouse button pressed, the part will be played back from the position at which you clicked. Playback will continue until you release the mouse button.

By using the Audition icon



The Audition and Audition Loop icons.

Clicking the Audition icon on the toolbar plays back the edited audio, according to the following rules:

- If you have selected events in the part, only the section between the first and last selected event will be played back.
- If you have made a range selection, only this section will be played back.
- If there is no selection, the whole part will be played back. Note that if the project cursor is within the part, playback starts from the current cursor position. If the project cursor is outside the part, playback starts from the beginning of the part.
- If the Audition Loop icon is activated, playback will continue until you deactivate the Audition icon. Otherwise, the section will be played back once.
- **When auditioning with the Speaker tool or Audition icon, audio will be routed directly to the first output bus, bypassing the audio channel's settings, effects and EQs.**

You can adjust the auditioning level with the miniature level fader on the toolbar. This does not affect the regular playback level.

By using regular playback

You can of course use the regular playback controls while in the Audio Part Editor. Furthermore, if you activate the Solo Editor button on the toolbar, only the events in the edited part will be played back.

The independent track loop function

The independent track loop is a sort of “mini-cycle”, affecting only the edited part. When the loop is activated, the events in the parts that are within the loop will be repeated continuously and completely independent – other events (on other tracks) are played back as usual. The only “interaction” between the loop and the “regular playback” is that every time the cycle starts over again, so does the loop.

To set up the independent track loop, proceed as follows:

1. Turn on the loop by clicking on the Loop button on the toolbar.
If it isn't visible, you need to right-click (Windows) or [Ctrl]-click (Mac) the toolbar and add the Independent Track Loop Settings section – see [page 712](#).



When the loop is activated, the cycle isn't shown in the editor's ruler. Now you need to specify the length of the loop:

2. Either [Ctrl]/[Command]-click and [Alt]/[Option]-click in the ruler to set the start and end of the loop, respectively...
3. ...or edit the loop start and end positions numerically in the fields next to the Loop button.

The loop is indicated in purple in the ruler.

- The events will be looped as long as the Loop button is activated and the Audio Part Editor window is open.

Scrubbing

In the Audio Part Editor, the Scrub tool has a separate icon on the toolbar. Apart from that, scrubbing works exactly as in the Project window (see [page 115](#)).

Common methods

Assembling a “perfect take”

When you record audio in Cycle mode, either an event or a region (or both) is created for each recorded lap (see [page 54](#)). These events and regions are named “Take X”, where “X” is the number of the take. You can create a perfect take by putting together sections of the different takes in the Audio Part Editor.

- **The procedure below will not work if you recorded with “Keep Last” mode selected on the Transport panel.**

In that case, only the last take will be kept on the track (although the previous takes will be available as regions in the Pool)

First, you have to create an audio part from the takes. This procedure is slightly different depending on whether you choose to create events or regions.

Creating an audio part from events

1. In the Project window, use the Object Selection tool to draw a rectangle around the recorded events.

This is necessary, since clicking on the event may just select the event on top (the last take). If in doubt, check the info line – the info text should be yellow.

2. Pull down the Audio menu and select “Events to Part”.

The events are converted to an audio part.

- Note that the events cycle record mode also makes it easy to combine different takes in the Project window – see [page 55](#).

Creating an audio part from regions

1. In the Project window, select the event you recorded in Cycle mode. After recording, this will play the last take.

2. Pull down the Audio menu and select “Events to Part”.

You are asked whether you want to “Create Part using Regions”.


3. Click “Regions”.

The regions are converted to an audio part.

Assembling a take

1. Double click the part to open the Audio Part Editor.

Now, the different takes will be placed on different lanes, with the last take at the bottom.

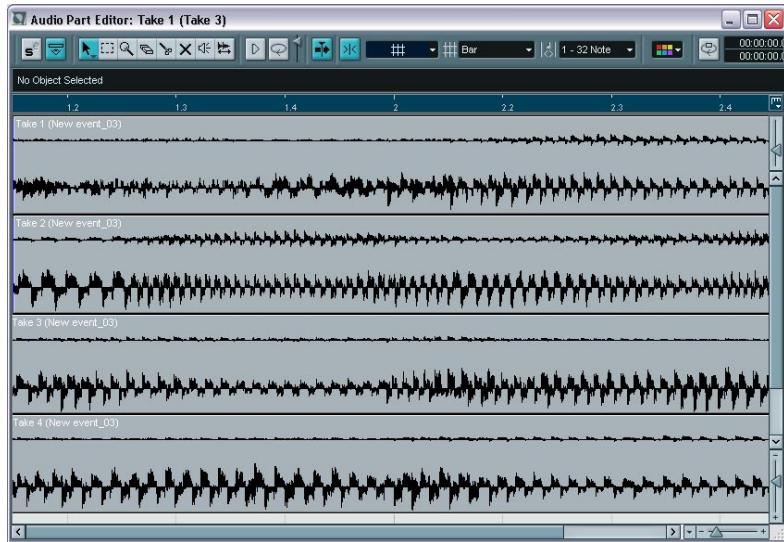

2. Use the tools to cut out pieces of the takes and assemble the final result.

This can include splitting with the Scissors tool, resizing events with the Arrow tool or deleting with the Eraser tool.

- Remember that the events on the lowest lane have playback priority.
Use the Audition icon to audition the result.

3. Close the Audio Part Editor.

You have now assembled a “perfect take”!

Options and Settings

The following options and settings are available in the Audio Part Editor:

- **Snap**

You can specify an independent Snap mode (and snap value for the Grid mode) in the editor. The functionality is exactly the same as in the Project window.

- **Autoscroll**

When Autoscroll is activated on the toolbar, the window will scroll during playback, keeping the project cursor visible in the editor. This setting can be activated or deactivated individually for each window.

18

**Working with hitpoints and
slices**

Background

Hitpoint detection is a special feature of the Sample Editor. It automatically detects attack transients in an audio file, and then adds a type of marker, a “hitpoint”, at each transient. These hitpoints allow you to create “slices”, where each slice ideally represents each individual sound or “beat” in a loop (drum or other rhythmic loops work best with this feature). When you have successfully sliced the audio file, you can do a number of useful things with it:

- Change the tempo without affecting pitch.
- Extract the timing (a groove map) from a drum loop. This can then be applied to quantize other events.
- Replace individual sounds in a drum loop.
- Edit the actual playing in the drum loop without affecting the basic feel.
- Extract sounds from loops.
- **The term “loop” is used throughout this chapter. Loop in this context usually means an audio file with a musical timebase, i.e. the length of the loop represents a certain number of bars and/or beats at a certain tempo. Playing the loop back at the right tempo in a cycle set to the correct length will produce a continuous loop, without gaps.**

Using hitpoints

The basic functionality of using hitpoints to slice up a loop is to make a loop fit the tempo of a song, or alternatively to create a situation that allows the song tempo to be changed whilst retaining the timing of a rhythmic audio loop, just like when using MIDI files.

What audio files can be used?

Here are some guidelines to what type of audio files will render the best results when slicing files using hitpoints:

- Each individual sound in the loop should have some noticeable attack. Slow attacks, legato playing etc. may not produce the desired result.
- Poorly recorded audio might be difficult to slice correctly. However, the hitpoint detection function can automatically normalize the audio to improve the detection results – see below.
- There may be problems with sounds drowned in smearing effects, like short delays.

Calculating hitpoints and slicing a loop – a quick tutorial

Before proceeding, find a suitable loop using the criteria above. At this point it doesn't matter whether you know the original tempo of the loop, as this will be automatically detected. Proceed as follows:

1. Open the event or clip for editing in the Sample Editor.
You could do this by double clicking an event on an audio track in the Project window or a clip in the Pool. In this example, we assume you work with an event on a track.
2. If needed, make a selection range spanning a section of the loop.
 - For example, if you have extracted the audio clip from a track on an audio sample CD, it may contain more than one actual loop (many loop CDs have several loops for each CD track).
In that case you would want to make a selection around the loop you're interested in. The selection can include some silence before and after the loop, it doesn't matter.

- Another possibility is that you want to extract a particular section within a long loop.
In that case, make a selection range that starts at the correct position in the loop and ends slightly after the end of the section you're interested in. You can use the audition and loop buttons on the toolbar to check your selection range.
 - Finally, if the audio clip contains one loop only or you want to use the very first loop in the clip, you don't need to make any selection at all.
- 3.** Click the Hitpoint Mode button on the Sample Editor toolbar.



The Hitpoint Mode button.

Now a dialog appears with settings for the hitpoint detection:



- 4.** Leave the “Use level scan” checkbox activated.

When this is on, the hitpoints detection function will analyze a normalized version of the audio, which most often gives more accurate detection results. Note that this doesn't affect the actual audio loop in any way.

- 5.** Activate the “Adjust Loop” checkbox.

This tries to detect the loop's tempo automatically, based on the following settings:

- Maximum bars

This will affect the length of the loop in the following way: the program will look at the selection range you've made (if any) and the Maximum bars setting and try to set the loop length to an even number of bars, less than or equal to the Maximum bars value. This means that if you want to use the first bar in the selection (or clip) only, you should set Maximum bars to 1 (note that this is required for extracting grooves – these must

be 1 bar long!). Similarly, if you are working with a long audio clip and want to use the first x bars in the clip, set Maximum bars to this number.

If you want to use the whole selection (or clip), you should set Maximum bars to the number of bars in the selection/clip, or to a higher value.

- **Beats**

This doesn't affect the actual detection but rather which hitpoints will be shown afterwards. If you e.g. know that your loop is based on 1/16th notes, select "1/16". If you're uncertain, set this to "All" – you can change this setting afterwards if needed.

- **Minimum - Maximum BPM**

These values help the program detect the tempo of the loop – set them so that the original loop tempo is somewhere in between.

- **The smaller the min-max bpm range, the higher the precision of the hit-point detection – if you have a good idea about the original loop tempo, set a narrow min-max range for best results.**

If you have no idea about the original loop tempo, listen to the loop and try to determine whether it's slow (70-100 bpm, common in hip-hop, soul, r'n'b, etc.), medium (100-140 bpm, typical for house, some rock, etc.) or fast (trance, d'n'b, etc.).

You can use a pretty wide min-max range, but if the max value is twice the min value or more you will probably get the wrong result.

6. Click Process.

The hitpoints are detected.

As you now can see, hitpoints have been set at the beginning of each sound in the loop (or at least at most sounds), a blue area is shown in the ruler (indicating the length of the loop as set with the “Maximum bars” setting in the dialog) and the right half of the toolbar now shows the Sensivity slider and additional pop-ups.



7. Check that the loop range is correct by activating the loop and audition buttons in the toolbar.

The loop should be played back repeatedly until you click the audition button again.

Note: if you made a selection range before calculating the hitpoints, you need to remove this by clicking anywhere in the clip – otherwise the selection range will be played back instead of the loop range!

8. If you now move the Hitpoint Sensivity slider to the left, this gradually hides the hitpoints. Moving the slider to the right increases the sensitivity to reveal additional hitpoints detected during the calculate process. The basic aim is to add, remove or in various other ways edit the hitpoints so that one individual sound is played between each hitpoint. This is described in detail starting on [page 409](#).

As you can see, the calculated original tempo is shown to the right on the toolbar (see [page 408](#)). In the next step, the loop will adapt to the project tempo set in Nuendo.

9. Pull down the Audio menu, and select “Create Audio Slices” from the Advanced submenu.

Now the following happens:

- The Sample Editor closes.
- The audio event is “sliced” so that there is a separate event for each hitpoint. Only the section within the loop range (blue ruler area) is kept.
- The audio event is replaced by an audio part, containing the slices (double click the part to view the slices in the Audio Part Editor).
- The loop is automatically adapted to the project tempo.



The slices in the Audio Part Editor. Here, the project tempo was higher than the loop's original tempo – this means the slice events will overlap slightly.

- If you opened the Sample Editor for a clip in the Pool, you will find that the icon for the clip changes in the Pool (to indicate that it is sliced). Dragging the sliced clip from the Pool to an audio track will create an audio part with the slices adapted to the project tempo, just as above.

10. If you activate cycle playback on the Transport panel, the loop should now play back seamlessly at the tempo set in the program!

11. To make the loop follow any further tempo changes, make sure it's set to “Musical time base” by using the toggle button in the Track list or Inspector (the button should show a note symbol – see [page 110](#)).

- Note that if the project tempo is lower than the loop's original tempo, there may be audible gaps between each slice event in the part.

This can be remedied by using the Close Gaps function on the Advanced submenu – see [page 420](#). You should also consider activating auto fades for the part's audio track – fade-outs set to about 10 ms will help eliminate any clicks between the slices when you play back the part. See [page 178](#).

- If the project tempo is higher than the loop's original tempo, you may want to activate auto crossfades for the track.

You can use the Close Gaps functions in this case as well if needed.

A note about the calculated tempo

The “original tempo” setting shown in the toolbar depends on the following settings:

- The loop range (indicated by the bright blue area in the ruler).
This determines which area of the loop event should be used for the tempo detection.
- The bars, beats and time signature settings the toolbar.
These inform the program about the length (in musical terms) of the loop range.

If you adjust the loop range (by dragging its edges in the ruler) or the bars/beats/signature settings on the toolbar, the original tempo display will change as well. For the original tempo to be correctly calculated, the bars/beats/signature setting should match the loop range. In other words, if the loop range contains exactly one bar of music (in 4/4 time), the toolbar should be set to 1 bar, 0 beats, 4/4 signature.

This is what the program attempts to do when automatically calculating the tempo. If you turn off “Adjust loop” when detecting hitpoints, you need to set this up manually, by adjusting the loop range and specifying the correct bars, beats and time signature.

- A quick way to adjust the loop range is to make a selection range and select “Locators to Selection” from the Transport menu (or use the key command for this, by default [P]).

In Hitpoint mode in the Sample Editor, this will adjust the loop range rather than the actual locator (cycle) range. Note that the selection range is magnetic to hitpoints, making it easy to adjust the loop range correctly this way!

Editing hitpoints

In this section, we go back a bit and look at what can be done with hitpoints in the Sample Editor. There are three ways to invoke the hitpoint calculation:

- Select Calculate Hitpoints from the Advanced submenu on the Audio menu.
- Click the Hitpoint Mode button in the Sample Editor toolbar.
- Select the Hitpoint Edit tool from the toolbar or Quick menu.

The last two methods will calculate hitpoints if they haven't already been calculated.


As outlined in the previous section, this makes the program calculate (or detect) hitpoints in the audio event, and you can use the Sensivity slider to change how many hitpoints are shown.

For some loops, this may be all that is needed to set the hitpoints so that each slice to be created will contain a single "hit" or sound. However there will almost certainly be cases when the automatic calculation may add a hitpoint where there shouldn't be one, and fail to add a hitpoint where one is needed, even if the Sensivity slider is set to maximum. If there are too many or too few hitpoints in a loop, it will most probably not play back properly.

When this occurs, you have to edit the hitpoints manually in the Sample Editor.

Auditioning slices

A slice is a section of the waveform, from one hitpoint to the next.

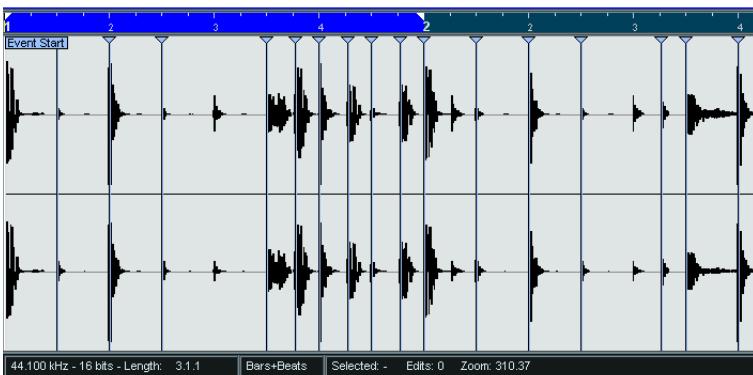

The first thing you should do before editing hitpoints is to listen to each slice in the Sample Editor, to determine what they contain. The aim is basically to avoid “double hits”, like a snare hit being followed by a hi-hat hit within the same slice. You also want to determine whether any hitpoints have been added that should be removed:

1. Open a loop in the Sample Editor.

If you have already created slices you can open them in the Sample Editor by double clicking any event in the Audio Part Editor. If it is a new loop, follow the instructions in the tutorial.

2. Select the Speaker tool.

3. Now you can simply point and click on any slice and it will be played back.

Listen for “double hits” and slices that contain parts of a single sound.


If you find hitpoints that need to be removed or instances where a hitpoint needs to be added, the first thing to try is to change the sensitivity setting – see the following section.

Setting the sensitivity

The loop is first analyzed to determine where hitpoints should appear (where the individual “beats” in the loop are), then you manually set the sensitivity with the Sensitivity slider to determine how many hitpoints there should be.

- Try raising the sensitivity to add “missing” hitpoints, and lowering it to remove unwanted hitpoints.
This may or may not work, depending on the situation, but as a general rule you should try this first.
- Audition the slices again to determine if changing the sensitivity has improved matters.

The “Use” pop-up menu



The “Use” pop-up menu on the toolbar affects which hitpoints are shown and is a useful tool for removing unwanted hitpoints. The options on the pop-up menu are:

Option	Description
All	All hitpoints are shown (taking the Sensitivity slider into account).
1/4, 1/8, 1/16, 1/32	Only hitpoints that are close to the selected note value positions within the loop (e.g. close to exact sixteenth note positions, if you have selected the 1/16 option) will be shown. Again, the Sensitivity slider is taken into account.
Metric Bias	This is like the “All” mode, but all hitpoints that are close to even meter divisions (1/4 notes, 1/8 notes, 1/16 notes, etc.) get a “sensitivity boost” – they are visible at lower Sensitivity slider settings. This is useful if you are working with dense or cluttered material with a lot of hitpoints, but you know that the material is based on a strict meter. By selecting Metric Bias it will be easier to find the hitpoints close to the meter position (although most other hitpoints are also available, at higher sensitivity settings).

How many slices do I need?

If your main reason for slicing the loop is to change the tempo, you generally need as many slices as you can get, but never more than one per individual “hit” in the loop.

If you want to create a groove (see [page 417](#)), you should try to get approximately one slice per eighth note, sixteenth note or whatever the loop requires.

Disabling slices

You might run into situations where there are too many slices – a single sound may have been split into two slices for example. You could of course reduce the sensitivity to get rid of the hitpoints you don't want, but then other hitpoints could disappear too, which may be undesirable. What you need to do in a situation like this is to disable an individual slice, using the Hitpoint Edit tool in Disable mode:

1. Select the Hitpoint Edit tool and click the tool icon on the toolbar again. A pop-up menu appears, listing the three modes of the Hitpoint Edit tool.
2. Select the Disable mode.

The pointer turns into a cross in the Sample Editor window.



3. Click on the handle (the triangle) of the hitpoint you wish to disable. The hitpoint handle is diminished and its line disappears to indicate that it is disabled.
4. Now, the hitpoint won't be taken into account when you create slices.
5. To reactivate a disabled hitpoint, click on the hitpoint handle with the Disable tool.

Locking slices

If you lock a hitpoint, by clicking on its handle with the Hitpoint Edit tool in Lock mode, it will stay even if you drag the Sensivity slider all the way to zero. This can be used in situations where one or several slices contain double hits, but raising the sensitivity adds a lot of unwanted slices.

1. Find the place where you hear double hits when auditioning.
2. Remember the current slider setting.
3. Raise the Sensivity slider to a higher value so that a hitpoint appears, separating the two sounds.
Most likely this will add a lot of other unwanted hitpoints as well.
4. Audition to make sure you got what you wanted.
5. Select the Hitpoint Edit tool and click the tool icon again to select Lock mode.
A lock icon is shown beside the pointer in the Sample Editor window.
6. Lock the new slice by clicking on its handle.
7. Drag the Sensivity slider to the original setting.
The locked hitpoint will remain shown.
 - You can unlock a locked hitpoint by clicking it again with the Hitpoint Edit tool in Lock mode.


Setting hitpoints manually

If you cannot get the desired result by adjusting sensitivity, disabling or locking, you can add, move and delete hitpoints manually.

Adding hitpoints

Manually adding hitpoints can be done in situations where a hitpoint is missing at a specific point, but doesn't appear even if the sensitivity is set to full.

1. Zoom in on the waveform at the point where you wish to add a hitpoint.
2. Audition the area with the Speaker tool to make sure that the start of the sound is in view.
3. Activate Snap to Zero Crossing on the Sample Editor toolbar.
By finding zero crossings in the waveform (positions where the amplitude is close to zero), manually added slices won't introduce any clicks or pops. All hitpoints found by the Calculate function are automatically placed at zero crossings.
4. Select the Pencil tool from the Sample Editor toolbar and click just before the start of the sound.
A new hitpoint appears. Manually added hitpoints are locked by default.

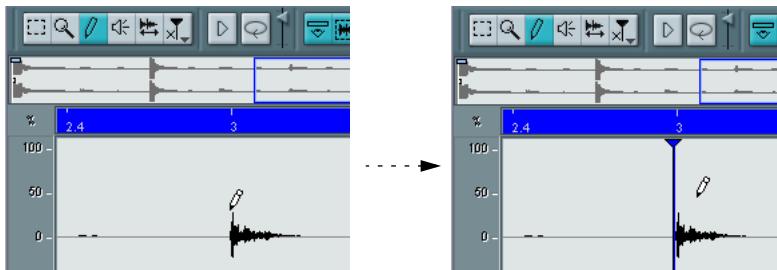

- If you click and keep the mouse button pressed, you can adjust the position of the new hitpoint by dragging.
Releasing the mouse button adds the hitpoint.
5. Audition the new slice with the Play tool to make sure you got what you wanted.

Moving hitpoints

If you manually added a hitpoint, and it was either placed too far away from the start of the sound, or too far into the sound, you can manually move the hitpoint. It is also possible to move calculated hitpoints this way.

1. Make sure Snap to Zero Crossing is activated on the Sample Editor toolbar.
2. Select the Hitpoint Edit tool and click the tool icon again to select the Move mode.
You can also use the regular Range Selection tool for this.
3. Click on the hitpoint handle and drag it to the new position.

Deleting hitpoints

To delete a hitpoint, select the Move tool and drag it out of the Sample Editor window. Hitpoints that you have created manually can also be deleted with the Hitpoint Edit tool in Disable mode.

Creating slices

After you have specified the correct loop length and time signature and worked on the hitpoints in the Sample Editor so that one sound per slice is heard, it is time to actually slice the file (if that is what you want to do – there are other uses for hitpoints as well, as described on the following pages). This is done by selecting “Create Audio Slices” from the Advanced submenu on the Audio menu.

- **This function (and many of the others on the Advanced submenu) are only available if a valid loop tempo is detected.**

In other words, if the bars/beats and loop range settings “make sense”.

Now the following happens:

- If you edited an event on an audio track, the Sample Editor closes.
- The audio event is “sliced” so that there is a separate event for each hitpoint.
In other words, the sections between the hitpoints become separate events, all referring to the same original file.
- On the audio track, the audio event is replaced by an audio part, containing the slices.
If you edited a clip from the Pool, you need to drag it to an audio track to get a part with the slices.

- The loop is automatically adapted to the tempo set in Nuendo.

This takes the loop length settings you made into account: if the loop was e.g. one bar long, the part is resized to fit exactly one bar in the Nuendo tempo, and the slices are moved accordingly – keeping their relative positions intact within the part.

Now, you can change the tempo and have the loop automatically follow (provided that the track is set to musical time base – see [page 110](#)). Furthermore, you can double click the part to edit the slices in the Audio Part Editor. You can:

- Remove or mute slices.
- Change the loop by reordering, replacing or quantizing slices.
- Apply processing or effects to individual slices.
- Create new files from individual slices using the “Bounce Selection” function on the Audio menu.


Creating groove quantize maps

You can generate groove quantize maps based on the hitpoints you have created in the Sample Editor. Groove quantizing is not meant for correcting errors, but for creating rhythmic feels. This is done by comparing your recorded music with a “groove” (a timing grid generated from the file) and moving the appropriate notes so that their timing matches the one of the groove. In other words, you can extract the timing from an audio loop and use it for quantizing MIDI parts (or other audio loops, after slicing them).

Proceed as follows:

1. Create and edit hitpoints as described earlier in this chapter.
You don't have to create slices – just set up the hitpoints.
 - **Groove quantize maps cannot be longer than one bar – set Maximum bars to 1 when you calculate the hitpoints.**
Or, you can adjust the loop length manually after calculating the hitpoints.
 - You should try to get approximately one slice per eighth note, sixteenth note or whatever the loop requires when setting hitpoints for extracting a groove.
It can be helpful to use one of the note value-based options on the “Use” pop-up menu when you're setting up the hitpoints (see [page 411](#)).
2. When you have finished setting the hitpoints, select “Create Groove Quantize” from the Advanced submenu on the Audio menu.
The groove is extracted.
3. If you now pull down the Quantize pop-up in the Project window you will find an additional item at the bottom of the list, with the same name as the file from which you extracted the groove.
This groove can now be selected as a base for quantizing, just like any other quantize value. See [page 469](#).

Other Advanced submenu items

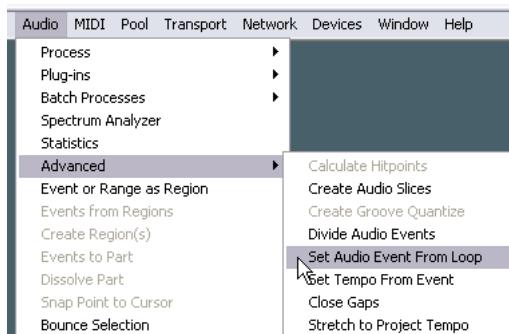

On the Advanced submenu on the Audio menu you will also find the following functions:

Divide Audio Events

This Advanced submenu item can be used when you simply wish to create separate events according to the hitpoints for a file. This means that you do not have to make the same considerations as when slicing for tempo changes. You can use any method you like to set hitpoints, use sensitivity, note values, manually or any combination.

- The slices created will appear in the Project window as separate events.

Set Audio Event from Loop

When you calculate hitpoints, a special loop range is defined in the Sample Editor – indicated by the bright blue area in the ruler. If you used the “Adjust Loop” option in the dialog (see [page 404](#)), the loop will have the length specified with the “Maximum bars” setting (or the length of the whole event, if you set a higher “Maximum bars” value).

The Set Audio Event from Loop function will resize the event according to the loop range. For example, if you have a long loop event and want to “extract” the first bar only, simply calculate hitpoints with “Maximum bars” set to 1, and then use Set Audio Event from Loop.

Set Tempo from Event

This function sets the project tempo according to the original tempo of the loop (as calculated by the hitpoints detection, or set up manually – see [page 408](#)). The result depends on whether the Tempo track is activated or you are using fixed tempo.

- If you are using fixed tempo, you will be asked to confirm that you want to change this – click Yes to set the fixed tempo to the event's original tempo.
- If you are using the Tempo track, but there are no tempo changes, you will be asked whether to change the global tempo or not:
Click Yes to change the global tempo (the first tempo event on the Tempo track) or No to insert tempo events at the beginning and end of the audio event (i.e. the project tempo will be adapted to the loop tempo but only during the course of the event).
- If you are using the Tempo track with tempo changes, new tempo events will be inserted at the beginning and end of the audio event.
The project tempo will be adapted to the loop tempo during the course of the event.

Stretch to Project Tempo

The Stretch to Project Tempo function on the Advanced submenu (Audio menu) makes use of the “original tempo” calculated by the hitpoint detection and applies time stretch to the selected event, so that it fits the current project tempo (the tempo at the start position of the event is used).

This can be used for stretching a whole loop (not sliced) to the project tempo. Note: for this function to be available, you must have calculated hitpoints for the event (since the function relies on the “original tempo” information).

Using the Close Gaps function

If you have sliced a loop for tempo changes, lowering the tempo below the loop's original tempo will create gaps between the slices. The lower the tempo is in relation to the original tempo, the wider the gaps will be. This can be fixed using the "Close Gaps" function on the Advanced submenu on the Audio menu:

1. Set the desired tempo.
2. Select the part in the Project window.
3. Select "Close Gaps" from the Advanced submenu.
Now time stretch is applied on each slice to close the gaps. Depending on the length of the part, this can take a little while.
4. The waveform is redrawn and the gaps are now closed!
 - Note that this feature creates new clips in the Pool, one for each slice.
 - Close Gaps can also be used when the project tempo is higher than the original loop tempo.
This will use the time stretch function to shrink the slices to fit.
 - If you decide to change the tempo again after using the Close Gaps function, you should undo the Close Gaps operation or start over again, using the original unstretched file.
 - You can also use this function on individual events (in the Audio Part Editor or Project window).
The events don't have to be slices – you can use Close Gaps simply to stretch an audio event to the start position of the next event.

19

The Pool

Background

What is the Pool?

Every time you record on an audio track, a file is created on your hard disk. A reference to this file – a clip – is also added to the Pool. Two general rules apply to the Pool:

- All clips, audio or video, that belong to a project are listed in the Pool.
- There is a separate Pool for every project.

The way the Pool displays folders and their contents is similar to the way the Mac OS X Finder and the Windows Explorer display folders and lists of files.

What can you do in the Pool?

In the Pool you can, amongst other things, perform the following operations:

Operations that affect files on disk

- Import clips (audio files can automatically be copied and/or converted).
- Convert file formats.
- Rename clips (this will also rename the referred files on disk).
- Delete clips (if you select the “Move to Trash” option and empty the Trash folder – see [page 430](#)).
- Prepare File Archives for backup.
- Minimize Files.

Operations that only affect clips

- Copy clips.
- Audition clips.
- Organize clips.
- Apply audio processing to clips.
- Save or import complete Pool files.

Opening the Pool

You open the Pool in any of the following ways:

- By clicking the Pool icon in the Project window.



- By selecting "Pool" on the Project menu or "Open Pool Window" on the Pool menu.
- By using a key command (by default [Ctrl]/[Command]-[P]).

The content of the Pool is divided into three main folders:

- The Audio folder

This contains all audio clips and regions currently in the project.

- The Video folder


This contains all video clips currently in the project.

- The Trash folder


Unused clips can be moved to the Trash folder for later permanent removal from the hard disk.

These folders cannot be renamed or deleted from the Pool, but any number of subfolders can be added (see [page 442](#)).

Window Overview

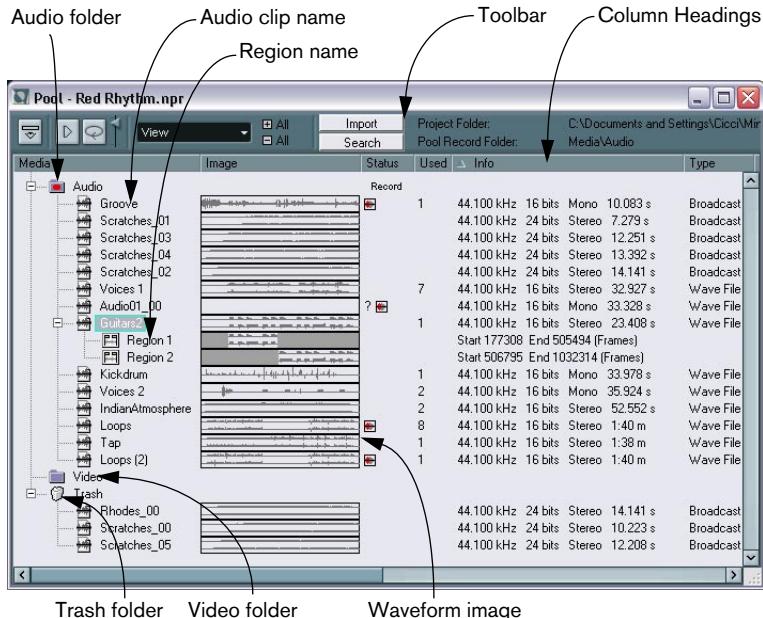

Toolbar overview

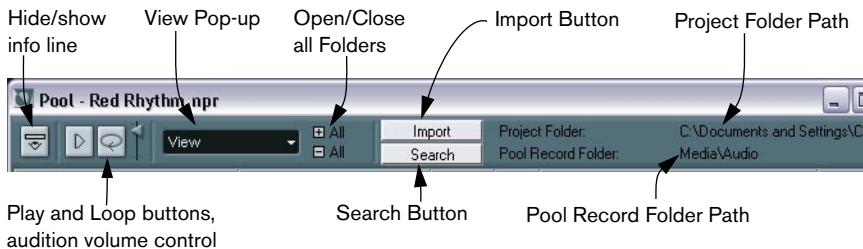

The info line

Click the “Show Info” button on the toolbar to show or hide the info line at the bottom of the Pool window. It shows the following information:



How clips and regions are displayed in the Pool

- Audio clips are represented by a waveform icon followed by the clip name.
- Audio regions are represented by a region icon followed by the region name.
- Video clips are represented by a camera icon followed by the clip name.

The Pool window columns

Various information about the clips and regions can be viewed in the Pool window columns. The columns contain the following information:

Column	Description
Media	This column contains the Audio, Video and Trash folders. If the folders are opened, the clip or region names are shown and can be edited. This column is always shown.
Used	This column displays the number of times a clip is used in the project. If a column row is empty, the corresponding clip is not used.
Status	This column displays various icons that relate to the current Pool and clip status. See page 427 for a description of the icons.
Info	This column shows the following information for audio clips: The sample rate, bit resolution, number of channels and the length in seconds. For regions, it displays start and end times in frames, and for video clips the frame rate, number of frames, and length in seconds.
Type	This column shows the file format of the clip.
Date	This column shows the date when the clip was created.
Origin Time	This column shows the original start position where a clip was recorded in the project. As this value can be used as a basis for the "Insert into Project" Pool menu item (and other functions), you can change it if the Origin Time value is redundant. This can either be done by editing the value in the column, or by selecting the corresponding clip in the Pool, moving the project cursor to the new desired position and selecting "Update Origin" from the Pool menu.
Image	This column displays waveform images of audio clips or regions.
Path	This column shows the path to the location of a clip on the hard disk.
Reel Name	If you have imported an OMF file (see page 686), they may include this attribute, in which case it is shown in this column. The Reel Name describes the 'physical' reel or tape from which the media was originally captured.

About the Status column symbols

The Status column can display various symbols that relate to the clips status. The following symbols can be shown:

Symbol	Description
Record	This indicates the current Pool Record folder (see page 441).
	This symbol is shown if a clip has been processed.
	The question mark indicates that a clip is referenced to the project but is missing from the Pool (see page 434).
	This indicates that the clip file is external, i.e. located outside the current Audio folder for the project.
	This indicates that the clip has been recorded in the currently open version of the project. This is useful for finding recently recorded clips quickly.

Sorting the Pool contents

You can sort the clips in the Pool by name, date etc. This is done by clicking on the corresponding column heading. Clicking again on the same heading switches between ascending and descending sort order.

The arrow indicates the sort column and sort order.



Operations

Renaming clips in the Pool

To rename a clip in the Pool, select it and click on the existing name, type in a new name and press [Return].

-
- Renaming a clip in the Pool is much preferred to renaming it outside Nuendo (for example on the computer desktop). This way Nuendo already “knows” about the change, and won’t lose track of the clip the next time you open the project. See [page 434](#) for details about lost files.
-

Copying clips in the Pool

To make a duplicate clip, proceed as follows:

1. Select the clip you wish to copy.
2. Select “New Version” on the Pool menu.

A new version of the clip appears in the same Pool folder, with the same name but with a “version number” after it, to indicate that the new clip is a duplicate. The first copy made of a clip will logically get the version number “2” and so on.

-
- Copying a clip does not create a new file on disk, but just a new edit version of the clip (referring to the same original file).
-

Inserting clips into a project

Using menus

1. Select the clip(s) you want to insert into the project.
2. Pull down the Pool menu and select an “Insert into Project” option:


Option	Description
At Timecode Position...	A dialog appears, allowing you to enter a timecode position at which the clip(s) will be inserted.
At Cursor	The clip(s) will be inserted at the current project cursor position.
At Origin	The clip(s) will be inserted at their Origin Time position.

- Note that the clip will be positioned so that its snap point is aligned with the selected insert position.
You can also open the Sample Editor for a clip by double clicking it, and perform the insert operation from there. This allows you to set the snap point for a clip before inserting it.
3. The clip is inserted on a new audio track, created automatically, or on a selected track.
If several tracks are selected, the clip will be inserted on the first selected track.

By using drag and drop

You can use drag and drop to insert clips into the Project window.
You can also use drag and drop from the Sample Editor for a clip by making a selection range and pressing [Ctrl]/[Command] while dragging. Note:

- Snap is taken into account if activated.
- While you drag the clip in the Project window, its position will be indicated by a marker line and a numerical position box.
Note that these indicate the position of the snap point in the clip. For example, if you drop the clip at the position 22.00, this will be where the snap point ends up. See [page 376](#) for info about how to set the snap point.

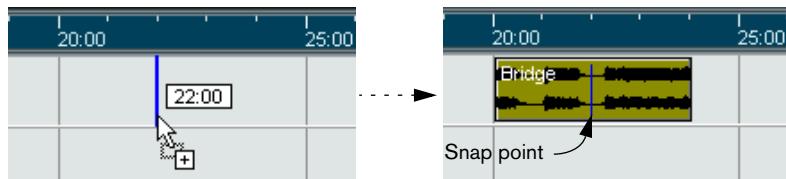


- If you position the clip in an empty area in the event display (i.e. below existing tracks), a new track is created for the inserted event.

Deleting clips

Removing clips from the Pool

To remove a clip from the Pool *without* deleting it from the hard disk, proceed as follows:

1. Select the file(s) and select “Delete” from the Edit menu (or press [Backspace] or [Delete]).
- If you try to delete a clip that is used by one or more events, the program will ask you if you want to remove these events from the project.

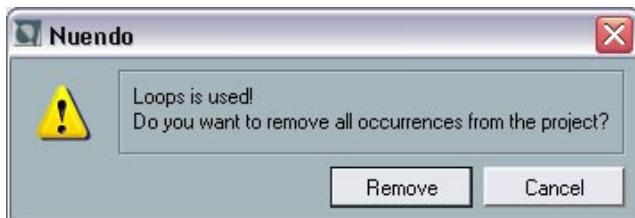

Canceling means that neither the clip nor the associated events are deleted.

2. Click Remove.

A new prompt asks whether you want to move the clip to the Trash or remove it from the Pool.

3. Select “Remove from Pool”.

The clip is no longer associated with the project, but still exists on the hard disk, and can be used in other projects etc. This operation can be undone.

Deleting from the hard disk

To delete a file permanently from the hard disk, it must first be moved to the Trash folder:

- Follow the instructions for deleting clips above and select “Trash”.
When clips are in the Trash folder they can be removed permanently.
 - Select “Empty Trash” on the Pool menu.
A dialog box asks you if you are sure you want to follow through. Remember that this operation cannot be undone!
- Before you permanently delete audio files from the hard disk, you should make sure that these aren't used by another project!

Removing unused clips from the Pool

This function finds all clips in the Pool that are not used in the project, and either moves them to the Pool Trash folder where they can be permanently deleted, or removes them from the Pool:

1. Select “Remove Unused Media” on the Pool menu.

A prompt appears with the text “Move to Trash or Remove From Pool?”

2. Make your selection.

Locating events referring to a clip in the Pool

If you want to find out which events in the project refer to a particular clip in the Pool, proceed as follows:

1. Select the clip in the Pool.

2. Select “Select in Project” on the Pool menu.

All events that refer to the selected clip are now selected in the Project window.

Locating clips or regions in the Pool

You can perform a search of the Pool to locate particular clips or regions, in the following way:

1. Select “Find in Pool” from the Pool menu.

This opens the Find Media window, in which you can specify various criteria to match. You can search by any one (or a combination) of the following properties:

- Name.
 - Size (in seconds, minutes, frames or bytes).
 - Bitsize (resolution).
 - Channels (stereo or mono).
2. Tick the box beside the property you would like to search by, and enter the desired name or value.
For the “Size” property, you can search for sizes smaller or greater than a value, or between two values. This is determined by the second pop-up menu.
 3. Press Start.
The search result appears in the lower half of the window.

- To select the found clips or regions in the Pool, click the “Select in Pool” button.
 - To insert a found clip or region directly into the project, select it in the list in the dialog and select one of the “Insert into Project” options from the Pool menu.
The options are described on [page 428](#).
-
- The “Find in Pool” command is also accessible from the Project window – the Pool window does not have to be open.

Locating selected events

If you quickly want to find the clip for an event in the Project window, you can also use the following method:

1. Select one or several events in the Project window.
2. Pull down the Audio menu and select “Find Selected in Pool”.
The corresponding clip(s) will be located and highlighted in the Pool. If the Pool window isn't already open it will be opened.

Searching for audio files on disk

The Pool can help you locate audio files on your hard disk or other media. This works much like the regular file search, but with a couple of extra features:

1. Click the Search button in the toolbar.

A lower pane appears in the window, displaying the search functions.



2. Use the Folder pop-up menu to specify where to search.

The pop-up menu will list all your local drives and removable media.

- If you want to limit the search to certain folders, choose "Select Search Path" and select the desired folder in the dialog that appears.

The search will include the selected folder and all subfolders. Note also that folders you have recently selected using the "Select Search Path" function will appear on the pop-up menu, allowing you to quickly select any of them.

3. Specify the name of the file(s) to search for in the Name field.

You can use partial names or wildcards (*), if you like. Note however, that the function only searches for audio files of the supported formats.

4. Click the Search button in the search pane.

The search is started and the Search button is labeled Stop – click this to cancel the search if needed.

When the search is finished, the found files are listed to the right.

- To audition a file, select it in the list and use the playback controls to the left (Play, Stop, Pause and Loop).

If Auto Play is activated, selected files will automatically be played back.

- To import a found file into the Pool, select it in the list and click the Import button in the search pane.

5. To close the search pane, click the Search button in the toolbar again.

About missing files

When you open a project, you may get a warning that one or more files are “missing”. If you click Close in the warning dialog, the project will open anyway, without the missing files. In the Pool you can check which files are considered missing. This is indicated by a question mark in the Status column.

A file is considered missing under one of the following conditions:

- The file has been moved or renamed outside the program since the last time you worked with the project, and you ignored the Resolve Missing files dialog when you opened the project for the current session.
- You have moved or renamed the file outside the program during the current session.
- You have moved or renamed the folder in which the missing files are located.

Locate missing files

1. Select “Find Missing Files” from the Pool menu.
The Resolve Missing Files dialog opens.
2. In the dialog that appears, decide if you want the program to try to find the file for you (Search), if you want to do it yourself (Locate) or if you want to specify in which directory the program should search for the file (Folder).
 - If you select Locate, a file dialog opens, allowing you to locate the file manually.
Click “Open” when you have located the file.
 - If you select Folder, a dialog opens to let you specify the directory in which the missing file can be found.
This might be the preferred method if you have renamed or moved the folder containing the missing file, but the file still has the same name. Once you select the correct folder, the program finds the file and you can close the dialog.

- If you select Search, the program will scan your hard disks for a file with the proper name and display them in a list.
The dialog allows you to specify which folder or disk should be scanned. Click the Search Folder button, select a directory or a disk and then click the Start button. If found, select the file from the list and click "Accept". Afterwards Nuendo tries to map all other missing files automatically.

Reconstructing missing edit files

If a missing file cannot be found (e.g. if you have accidentally deleted it from the hard disk) it will normally be indicated with a question mark in the Status column in the Pool. However, if the missing file is an edit file (a file created when you process audio, stored in the Edits folder within the project folder), it may be possible for the program to reconstruct it by recreating the editing to the original audio file:

1. Open the Pool and locate the clip(s) for which files are missing.
2. Check the Status column – if this says “Reconstructible”, the file can be reconstructed by Nuendo.
3. Select the reconstructible clips and select “Reconstruct” from the Pool menu.

The editing is performed and the edit files are recreated.

Removing missing files from the Pool

If the Pool contains audio files that cannot be found or reconstructed, you may want to remove these:

- Select “Remove Missing Files” from the Pool menu to remove all missing files from the Pool (and remove their corresponding events from the Project window).

Auditioning clips in the Pool

There are two methods you can use to audition clips in the Pool:

- By selecting a clip and activating the Play button.
The whole clip will play back, unless you stop playback by clicking the Play button again.



The Play button.

- By clicking somewhere in the waveform image for a clip.
The clip will play from the position in the waveform you click until the end of the clip, unless you stop playback by clicking the Play button, or by clicking anywhere else in the pool window.



Clicking in the waveform image to audition a clip.

- In both cases, the audio will be routed directly to the first output bus.
You can adjust the auditioning level with the miniature level fader on the toolbar. This does not affect the regular playback level.

If you have activated the Loop button before you audition, the following will happen:



The Loop button.

- If you click the Play button to audition a clip, it will repeat indefinitely until you stop playback by clicking the Play or Loop button again.
- If you click in the waveform image to audition, the section from the point you clicked to the end of the clip will repeat indefinitely until you stop playback.

Opening clips in the Sample Editor


The Sample Editor allows you to perform detailed editing on the clip (see the Sample Editor chapter for details). You can open clips in the Sample Editor directly from the Pool in the following ways:

- If you double click on a clip waveform icon, the clip will open in the Sample Editor.
- If you double click on a region in the Pool, its clip will open in the Sample Editor with the region selected.

One practical use for this is to set a snap point for a clip (see [page 376](#)). When you later insert the clip from the Pool into the project, you can have it properly aligned according to the set snap point.

Import Medium...

The Import Medium dialog is used for importing files directly into the Pool. It is opened by using the Pool menu or by using the Import button in the Pool window.

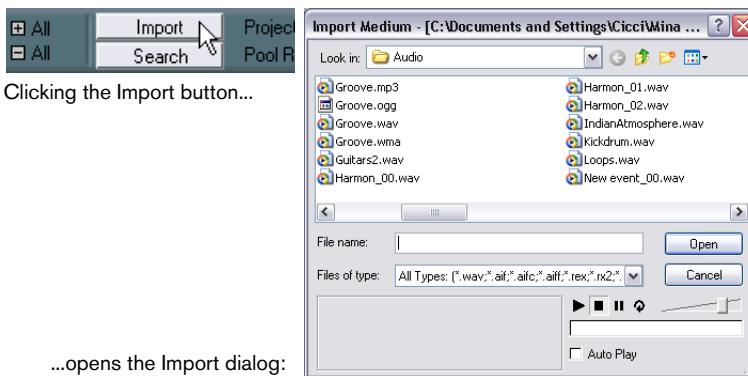

Clicking the Import button...

...opens the Import dialog:


The Import Medium dialog is a standard file dialog, where you can navigate to other folders, audition files etc. The following audio file formats can be imported:

- Wave (Normal or Broadcast, see [page 604](#))
- AIFF
- AIFC (Compressed AIFF)
- REX or REX 2 (see [page 700](#))
- Dolby Digital AC3 file (.ac3 – if you have the Steinberg Dolby Digital Encoder installed in your system)
- DTS file (.dts – if you have the Steinberg DTS Encoder installed in your system)
- Sound Designer II
- MPEG Layer 2 and Layer 3 (mp2 and mp3 files – see [page 701](#))
- Ogg Vorbis (ogg files – see [page 701](#))
- Windows Media Audio (Windows only – see [page 701](#))
- Wave64 (.w64 files)
- Stereo or mono
- Any sample rate (although files with another sample rate than the one used in the project will play back at the wrong speed and pitch – see below).
- 8, 16, 24 bit or 32 bit float resolution

In addition, AVI, QuickTime, Windows Media Video (Windows only) and MPEG 1 and 2 video files can be imported into the Pool.

- ☐ It is also possible to use the commands on the Import submenu on the File menu to import audio or video files into the Pool.
- ☐ For video files to be played back correctly, the right codecs have to be installed.

When you select a file in the Import Medium dialog and click Open, the Import Options dialog will appear.

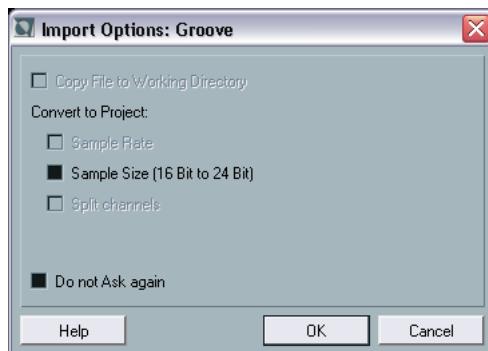

It contains the following options:

- Copy File to Working Directory.

Activate this if you want a copy of the file to be made in the Project's Audio folder, and have the clip refer to this copy. If the option is off, the clip will refer to the original file in the original location (and will thus be marked as "external" in the Pool – see [page 427](#)).

- Convert to Project.

Here you can choose to convert the sample rate and/or the sample size (resolution) to the current format used in the project. The options will only be available if necessary (if the sample rate is different than the one set for the project and/or if the sample size is lower than the record format used in the project).

Note that if you are importing several audio files in one go, the Import Options dialog will instead contain a "Convert if needed" checkbox. When this is activated, the imported files will be converted only if the sample rate is different or the sample size is lower than the project's.

- **Split Channels**
If this is activated, stereo and multi-channel files will be split into a corresponding number of mono files – one for each channel – and these will be imported into the Pool. Note that if you use this option, the imported files will always be copied to the Project's Audio folder, as described above.
- **Do not Ask again.**
If this is ticked, you will always import files according to the settings you have made, without this dialog appearing. This can be reset again in the Preferences–Audio Editing dialog.

You can always convert later should you so wish, by using the Convert Files (see [page 445](#)) or Conform Files (see [page 446](#)) options.

Importing audio CD tracks

You can import tracks (or sections of tracks) from an audio CD directly into the Pool by using the “Import Audio CD” function on the Pool menu. This opens a dialog in which you can specify which tracks should be grabbed from the CD, converted to audio files and added to the Pool.


For details about the Import Audio CD dialog, see [page 697](#).

Exporting regions as audio files

If you have created regions within an audio clip (see [page 382](#)) these can be exported as separate audio files. To create a new audio file from a region, proceed as follows:

1. In the Pool, select the region you wish to export.
 2. Pull down the Audio menu and select “Bounce Selection”.
A browser dialog opens.
 3. Select the folder in which you want the new file to be created.
A new audio file is created in the specified folder. The file will have the name of the region and will automatically be added to the Pool.
- If you have two clips that refer to the same audio file (different “versions” of clips, e.g. created with the “Convert to Real Copy” function), you can use the Bounce Selection function to create a new, separate file for the copied clip.
Select the clip and select Bounce Selection – you will be asked for a location and name for the new file.

Changing the Pool Record folder

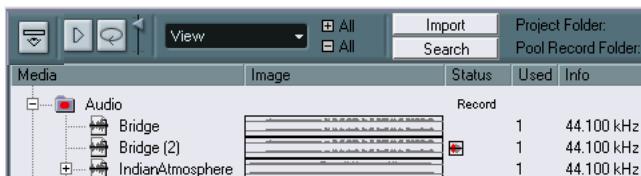

The Pool Record folder.

The Pool Record folder is where all audio clips that you record in the project will end up in the Pool. The Pool Record folder is indicated by the text “Record” in the Status column, and by a red dot on the folder itself, as shown in the picture above. By default, this is the main Audio folder. You can, however, at any time create a new Audio subfolder and designate this as your Pool Record folder. Proceed as follows:

1. Select the Audio folder or any audio clip.
You cannot designate the Video folder (or a subfolder in it) as the Pool Record folder.
2. Select “Create Folder” on the Pool menu.
A new empty audio subfolder appears in the Pool.
3. Select the new folder.
4. Select “Set Pool Record Folder” on the Pool menu, or click in the new folders Status column.

The new folder now becomes the Pool Record folder, and any audio recorded in the project will from this point on end up in this folder.

Organizing clips and folders

If you accumulate a large number of clips in the Pool, it may sometimes be difficult to quickly find specific items. In such cases, organizing clips in new subfolders with suitable names that reflect the content can be a solution. For example, you could put all sound effects in one folder, all lead vocals in another etc. Proceed as follows:

1. Select the type of folder, audio or video, in which you want to create a subfolder.
You cannot put audio clips in a video folder and vice versa.
2. Select “Create Folder” on the Pool menu.
A new empty subfolder named “New Folder” appears in the Pool.
3. Click on the name and type in a new appropriate name for the folder.
4. Select and drag the clips you wish to move to the new folder.
5. Repeat steps 1-4 as necessary.

Applying processing to clips in the Pool

You can apply audio processing to clips from within the Pool, just like you can to events in the Project window. Simply select the clip(s) and select a processing method or a saved batch process from the Audio menu. To find out more about audio processing, see [page 329](#).

Freeze Edits

If you have applied processing to a clip, either in the Project window or in the Pool, this is indicated by the red and grey waveform symbol in the Status column. This processing can always be undone using the Offline Process History (see [page 354](#)). You can also use the Freeze Edits function to create a new file with processing applied or replace the original with a processed version – see [page 359](#).

Minimize File

This item on the Pool menu allows you to change the size of audio files according to the audio clips referenced in a project. The files produced using this option will only contain the audio file portions actually used in the project, which can significantly reduce the size of the project (given that large portions of the audio files are unused).

- This operation will permanently alter the selected audio files in the Pool (the process cannot be undone), so be careful with this command!

If this is not what you want, you can use the “Save Project to New Folder” File menu item instead. This function also has the option of minimizing files, but copies all files into a new folder, leaving the original project untouched. See [page 681](#).

It is useful for archiving purposes. If you have completed a project and wish to minimize the project size as much as possible, use this function.

Proceed as follows:

1. Select the file(s) you wish to minimize in the Pool.

2. Select “Minimize File” from the Pool menu.

An alert appears informing you that the entire Edit History will be cleared. You will at this point have the option of cancelling or continuing the operation.

3. After the operation is finished, another alert asks you to save the project, to update the new file references.

Do so.

The audio file(s) in the Pool Record folder will now be cropped so that only the audio actually used in the project remains in the corresponding audio file.

Prepare Archive

This Pool menu command should be used when you want to archive a project. It checks that every clip referenced in the project is located in the same folder. To be more precise, it does the following:

- Any files that are located outside the current project folder will be copied to it.

Please note that audio files that reside within the project folder will not be copied to the audio folder. You will therefore have to copy them there manually before backing up the audio folder or save them separately during backup, see below.

- If any processing has been applied, you will be asked whether you want to Freeze Edits.

If you do this, you don't have to archive the Edit folder. Everything belonging to the project will be contained in the project file and the Audio folder.

- Once you have performed a Prepare Archive, you can copy the project file, the Audio folder and any other audio material you saved in the project folder to backup disks, etc.

It is not necessary to archive the Images folder, since these can be recreated by Nuendo. You may also find a file with the extension ".csh" in the project folder. This contains image information for edited clips and other data that can be recreated, and can safely be deleted.

-
- **Video clips are always referenced, and are not stored in the project folder.**
-

Importing and exporting Pool files

You can export a Pool as a separate file (file extension ".npl"), by using the Export Pool command on the Pool menu. If you import a Pool file with the Import Pool command, the file references in it are "added" to the current Pool.


- **The audio and video files themselves are not saved in the Pool file, only a reference to them.**

For there to be any point in importing a Pool file, you need access to all reference files (which preferably should have the same file paths as when the Pool was saved).

- **You can also save and open libraries – stand-alone Pool files that are not associated with a project.**

See [page 682](#).

Convert Files

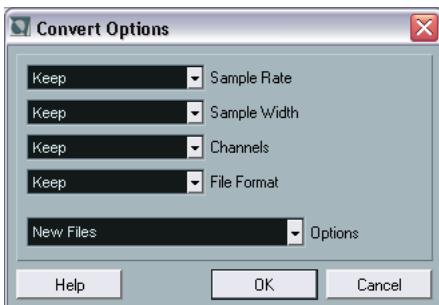

Selecting Convert Files on the Pool menu opens the Convert Options dialog which operates on selected files. Use the pop-up menus to specify which audio file attributes you want to keep and which you want to convert. The options are:

- **Sample Rate**
Keep as is, or convert to a sample rate between 8.000 and 192.000 kHz.
- **Sample Width**
Keep the sample width (resolution) as is, or convert to 16 bit, 24 bit or 32 Bit float.
- **Channels**
Keep as is, or convert the file to Mono or Stereo Interleaved.
- **File Format**
Keep as is, or convert to Wave, AIFF, Wave 64 or Broadcast Wave format.

Options

When you convert a file, you can use the Options pop-up to set one of the following options regarding what to do with the new file:

Option	Description
New Files	Creates a copy of the file in the audio folder and converts this new file according to the chosen attributes. The new file is added to the Pool, but all clip references will still point to the original, unconverted file.
Replace Files	Converts the original file without changing clip references. The references are however saved with the next save action.

Option	Description
New + Replace in Pool	Creates a new copy with the chosen attributes, replaces the original file with the new one in the Pool and redirects the current clip references from the original file to the new file. This is the option to select if you want your audio clips to refer to the converted file, but still want to keep the original file on disk (e.g. if the file is used in other projects).

Conform Files

By using this Pool menu command, you will change all selected files that have different file attributes than what is specified for the project, to conform to this standard. Proceed as follows:

1. Select all clips in the Pool.
2. Select “Conform Files” on the Pool menu.

A dialog opens allowing you to choose between keeping or replacing the original unconverted files in the Pool. The following applies:

- Clip/event references in the pool are always redirected to the conformed files.
- If any 'keep' option is selected, original files remain in the Project's Audio folder and new files are created.
- If you select the “Replace” option, files in the Pool and in the Project's Audio folder are replaced.


Extract Audio from Video

This Pool menu item allows you to extract the audio from a video file on disk and automatically generate a new audio clip that will appear in the Pool Record folder. The resulting clip will have the following properties:

- It will get the same file format and sample rate/width as is used in the current project.
- It will get the same name as the video file.
- **This function is not available for mpeg video files.**

Options and Settings

Customizing the view

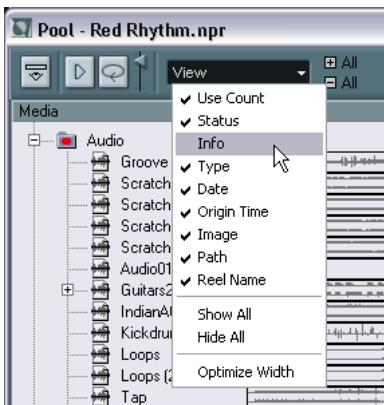

- You can specify which of the columns should be shown or hidden by selecting the View pop-up on the toolbar and ticking items on or off.
- You can rearrange the order of the columns by clicking on a column heading and dragging the column to the left or to the right.
The mouse pointer changes to a hand when you place it on the column heading.
- The width of a column can also be adjusted by placing the pointer between two column headers and dragging left or right.
The pointer changes to a divider when you place it between two column headers.

Search			Pool Record Folder:	
Status	Used	Type		
Record				
?		Wave File		
1		Broadcast W		

20

**MIDI realtime parameters and
effects**

Introduction

For each MIDI track, you can set up a number of track parameters and MIDI effects. These affect how the MIDI data is played back, “transforming” MIDI events in real time before they are sent to the MIDI outputs.

On the following pages, the available parameters and effects are described. Keep in mind:

- The actual MIDI events will not be affected – the changes happen “on the fly”.
- Since the track parameter settings don’t actually change the MIDI data on the track, they will not be reflected in the MIDI editors. To convert the settings to “real” MIDI events, you need to use the Merge MIDI in Loop function (see [page 465](#)).

The Inspector - General handling

The track parameters and effects are set up in the Inspector (although some settings are available in the mixer as well, see [page 196](#)). Here's a brief rundown on how to handle the Inspector:

- To show or hide the Inspector, click the Inspector icon on the Project window's toolbar.



- The Inspector for a MIDI track is divided into seven sections. You can fold or unfold the sections individually by clicking the tabs in their upper right corners.

Clicking the tab for a hidden section brings it to view and hides the other sections. [Ctrl]/[Command]-clicking the tab allows you to hide or show a section without affecting other sections. Finally, [Alt]/[Option]-clicking a tab shows or hides all sections in the Inspector.



- Folding a section does not affect the functionality but merely hides the section from view.**

In other words, your settings will still be active even if you fold the Inspector settings.

Basic track settings



The topmost Inspector section contains the basic settings for the selected MIDI track. These are settings that either affect the basic functionality for the track (mute, solo, enable record, etc.) or send out additional MIDI data to the connected devices (program change, volume, etc.). The section contains all settings in the Track list (see [page 85](#)), with a few additional parameters:

Parameter	Description
Track name field	Click to rename the track.
Mute/Solo buttons	Mutes or solos the MIDI track.
Read/Write buttons	Used for automating the track settings – see page 294 .
Input transformer button	Opens the Input Transformer dialog, allowing you to transform incoming MIDI events in real time. See the separate document “MIDI devices and features”.
Record enable button	Activate this to make the track ready for recording.
Monitor button	When this is activated (and MIDI Thru Active is on in the Preferences–MIDI dialog), incoming MIDI will be routed to the selected MIDI output.
Toggle Timebase button	Switches between musical (tempo related) and linear (time related) time base for the track. See page 110 .
Lock button	Activating this disables all editing of all events on the track.
Edit button	This opens the channel settings window for the track (a window showing a channel strip with volume fader and other controls, along with effect settings – see page 222).

Parameter	Description
Volume	Use this to adjust the level for the track. Changing this setting will move the track's fader in the Mixer window, and vice versa. See page 199 for more about setting levels.
Pan	Use this to adjust the panning of the track.
Delay	This adjusts the playback timing of the MIDI track. Positive values delay the playback while negative values cause the track to play earlier. The values are set in milliseconds.
In/Out/Chn pop-ups	This is where you select MIDI input, MIDI output and MIDI channel for the track.
Edit VST Instrument button	If the MIDI track is routed to a VST instrument, clicking this button opens the control panel for the VST instrument.
Bnk/Prg/Programs	Allows you to select sounds by sending MIDI Bank Select and Program Change messages (see below)
Map pop-up	Allows you to select a drum map for the track – see page 534 .

- Note that the functionality of the “Programs” settings (used for selecting sounds in the connected MIDI instrument) depends on to which instrument the MIDI output is routed, and how you have set up this in the MIDI Device Manager.

As described in the separate document “MIDI devices and features”, the MIDI Device Manager allows you to specify which MIDI instruments and other devices are connected to the various MIDI outputs, thus making it possible to select patches by name.

- Many of the basic track settings are duplicated in “mixer channel strip form”, in the Channel section at the bottom of the Inspector.
See [page 454](#).

Other Inspector sections

Apart from the basic track settings (above), the Track Parameters and the effect sections (both described on the following pages), the Inspector for a MIDI track also contains the following:

The Channel section

This contains a single channel strip, allowing you to set volume, pan, mute/solo and other parameters for the track.

- This is a “mirror” of the track’s channel strip in the Nuendo mixer – for details see [page 196](#).

The Notepad section

This is a standard notepad, allowing you to enter notes and comments about the track. Each track has its own notepad in the Inspector.

The Network section

This contains controls related to Nuendo’s Network functions. See the Networking pdf document for information.

Track parameters



The following settings will affect the MIDI events on the track in real time during playback. They will also be in effect if you play “live” with the track selected and record enabled (provided that “MIDI Thru Active” is activated on the Preferences–MIDI page). This makes it possible to e.g. transpose or adjust the velocity of your live playing.

- If you want to compare the result of your track parameters with the “unprocessed” MIDI, you can use the Bypass button in the Track Parameters section.

When this is activated, the Track Parameter settings will be temporarily disabled. A bypassed section is indicated by its Inspector tab turning yellow.



Transpose

This allows you to transpose all notes on the track in semitones. The available range is -127 to +127 semitones, but remember that the total range of MIDI note numbers is 0 to 127. Furthermore, not all instruments can play back notes over the whole range. Therefore, extreme transpositions can give rather strange and unwanted results.

Velocity Shift

This setting lets you change the dynamics of all notes on the track. The value in this field is added to the velocity of each note message that is sent out (use negative values to lower the velocities). The range is -127 to +127 with 0 representing no change in velocity.

Note that the effects of changing the velocity depends on the sound and instrument.

Velocity Compression

This function multiplies the velocity values with the factor you specify. This factor is set using a numerator (left value) and a denominator (right value), resulting in a fractional number (1/2, 3/4, 3/2 etc.). For example, if you set the factor to 3/4, the velocities will be three quarters of their original values. The point is, that this will also affect the *difference* in velocity between the notes, thereby compressing or expanding the velocity scale. Typically, you would combine this setting with the Velocity Shift parameter. An example:

Let's say you have three notes with the velocity values 60, 90 and 120, and wish to "even out" the velocity differences somewhat. If you set the Velocity Compression value to 1/2, the notes will play back with the velocities 30, 45 and 60. By adding 60 in the Velocity Shift field, you will have the notes playing back with the velocities 90, 105 and 120, meaning you have in effect compressed the velocity range.

In a similar way, you can use Velocity Compression values greater than 1/1 together with negative values in the Velocity Shift field, to expand the velocity range.

-
- Remember that the maximum velocity is always 127 no matter how much you try to expand.
-

Length Compression

This value adjusts the lengths of all notes on the track. As with Velocity Compression, the value is set with a numerator and denominator.

For example, the value 2/1 means that all note lengths will be doubled, while 1/4 means all note lengths will be quarter of the actual lengths.

Random

The Random settings let you introduce random variations to various properties of MIDI notes. Anything from very subtle variations to dramatic changes can be applied. There are two separate “Random generators”, each of which are set up in the following way:

1. Pull down the Random pop-up menu and select which note property should be randomized.

The options are position, pitch, velocity and length.

- **Keep in mind that depending on the content of the track, certain parameter changes might not be immediately noticeable, or have any effect at all (as would be the case if applying random length to a percussion track playing “one-shot” samples for example).**

To best audition the random changes choose a track with clearly defined rhythm and note content, if possible (as opposed to a string pad).

2. Set the desired range of random deviation by entering values in the two number fields.

The two values govern the limits of the randomization, so that the values will vary between the left value and the right value (you cannot set the left value higher than the right value). The maximum random range for each property is listed in the table below:

Property	Range
Position	-500 to +500 ticks
Pitch	-120 to +120 semitones
Velocity	-120 to +120
Length	-500 to +500 ticks

- Note again that you can make independent settings for the two random generators.
- To deactivate the Random function, pull down the Random pop-up menu(s) and select “OFF”.

Range

The Range function lets you specify a note (pitch) or velocity range and either force all notes to fit within this range, or exclude all notes outside this range from playback. As with the Random function, there are two separate Range settings. Set them up as follows:

1. Pull down the Range pop-up menu and select one of the following four modes:

Mode	Description
Vel. Limit	This function affects all velocity values <i>outside</i> the specified range. Velocity values below the Min setting (the lower limit of the range) are set to the Min value, and velocity values above the Max setting are set to the Max value. Notes with velocity values within the set range are not affected. Use this if you want to force all velocity values to fit within a certain range.
Vel. Filter	Velocity Filter works by <i>excluding</i> all notes with velocity values outside the specified range. Notes with velocity values below the Min setting or above the Max setting will not be played back. Use this to "isolate" notes with certain velocity values.
Note Limit	This function allows you to specify a pitch range, and forces all notes to fit within this range. Notes outside the specified range are transposed up or down in octave steps until they fit within the range. Note: If the range is too "narrow", so that some notes cannot be fit within the range by octave-transposing, these notes will get a pitch in the middle of the range. For example, if you have a note with a pitch of F3, and the range is C4-E4, that note will be transposed to D4.
Note Filter	Note Filter works by <i>excluding</i> all notes with pitches outside the specified range. Notes lower than the Min setting or higher than the Max setting will not be played back. Use this to "isolate" notes with certain pitches.

2. Use the two fields to the right to set the min and max values.

These values will be shown as numbers (0-127) for the velocity modes and as note numbers (C-2 to G8) for the pitch modes.

Note again that you can make independent settings for the two Range functions.

- To deactivate the Range function, pull down the Range pop-up menu(s) and select "OFF".

MIDI effects

Nuendo comes with a number of MIDI effect plug-ins, capable of transforming the MIDI output from a track in various ways.

Just like the MIDI track parameters, MIDI effects are applied in real time to the MIDI data played back from the track (or to MIDI you play live “thru” the track).

What are MIDI effects?

Although a MIDI effect can be similar to an audio effect, it's important to remember that you're not processing the *sound* resulting from MIDI playback, but the MIDI data (the “instructions” for how the music should be played back).

A MIDI effect will change properties of the MIDI events (e.g. change the pitch of notes) and/or generate new MIDI events (for example, a MIDI delay may add new MIDI notes, “echoing” the original notes).

- **The included MIDI effect plug-ins are described in the separate “MIDI devices and features” document.**

Insert and send effects

As with audio effects, there are two ways to route the MIDI events on a track to an effect:

- **If you add an insert effect, the MIDI events will be sent to the effect, which will process the data and pass it on to the track's MIDI output (or to another insert effect).**

In other words, the MIDI events will be routed “through” the insert effect.

- **If you use a send effect, the MIDI events will be sent both to the track's MIDI output and to the effect.**

That is, you will get both the unprocessed MIDI events and the output of the MIDI effect. Note that the effect can send its processed MIDI data to any MIDI output – not necessarily to the one used by the track.

There are separate sections in the Inspector for Inserts and Sends:

Inserts section




This allows you to add up to four MIDI insert effects. The section contains the following items:

Item	Description
Edit button	Opens the Channel Settings window for the MIDI track.
Bypass button	Click this to temporarily disable all insert effects for the track (useful for comparing with the unprocessed MIDI, etc.).
Inserts section tab	This lights blue if any insert effect is activated.
Effect selection pop-up menu (x 4)	Selecting an effect from this pop-up menu automatically activates it and brings up its control panel (which can be a separate window or a number of settings below the insert slot in the Inspector). To remove an insert effect completely, select "No Effect".
On button (x 4)	Allows you to turn the selected effect on or off.
Edit button (x4)	Click this to bring up the control panel for the selected effect. Depending on the effect, this may appear in a separate window or below the insert slot in the Inspector. Clicking the button again hides the control panel.

- Effects that display their controls in the Inspector can be forced to appear in a separate control panel window by pressing [Alt]/[Option] and clicking the Edit button.

Sends section

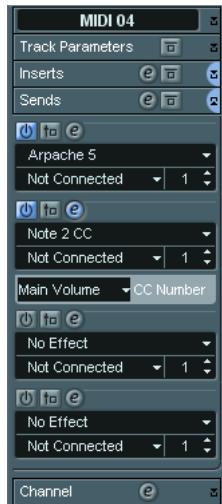

This allows you to add up to four MIDI send effects. Unlike audio send effects, you can select and activate send effects individually for each track. The section contains the following items:

Item	Description
Edit button	Opens the Channel Settings window for the MIDI track.
Bypass button	Click this to temporarily disable all send effects for the track (useful for comparing with the unprocessed MIDI, etc.).
Sends section tab	This lights blue if any send effect is activated.
Effect selection pop-up menu (x 4)	Selecting an effect from this pop-up menu automatically activates it and brings up its control panel (which can be a separate window or a number of settings below the send slot in the Inspector). To remove a send effect completely, select "No Effect".
On button (x 4)	Allows you to turn the selected effect on or off.
Edit button (x4)	Click this to bring up the control panel for the selected effect. Depending on the effect, this may appear in a separate window or below the sends slot in the Inspector. Clicking the button again hides the control panel.
Output pop-up menu (x4)	This determines to which MIDI output the effect should send the processed MIDI events.

Item	Description
Channel setting (x4)	This determines on which MIDI channel the effect should send the processed MIDI events.
Pre button (x4)	If this is activated, the MIDI signals will be sent to the send effects before the track parameters and insert effects.

- Effects that display their controls in the Inspector can be forced to appear in a separate control panel window by pressing [Alt]/[Option] and clicking the Edit button.

Applying a MIDI insert effect – an example

Here is a step-by-step example of how to add a MIDI insert effect to a MIDI track:

1. Select the MIDI track and open the Inspector.
2. Click the Inserts tab in the Inspector.
- Alternatively you could use the mixer: bring up the extended mixer panel and select “Inserts” on the view options pop-up menu for the track’s channel strip.
3. Click in one of the insert slots to show the MIDI effect pop-up menu.
4. Select the desired MIDI effect from the pop-up menu.

The effect is automatically activated (the power button for the insert slot lights up) and its control panel appears, either in a separate window or in the Inserts section below the slot (depending on the effect).

Now all MIDI from the track will be routed through the effect.

5. Use the control panel to make settings for the effect.
All included MIDI effects are described in the separate “MIDI devices and features” document.
- You can bypass the insert effect by clicking its power button (above the insert slot).
- To bypass all insert effects for the MIDI track, use the bypass button in the Inserts section in the Inspector, in the mixer channel strip or in the Track list.
- To remove an insert effect, click in its slot and select “No Effect”.

About presets

Several of the MIDI plug-ins come with a number of presets for instant use. The controls for handling presets consist of a Presets pop-up menu along with Store (+) and Remove (-) buttons.




- To load a preset, select it from the Presets pop-up menu.
- To store your current settings as a preset, click the (+) button to the right.
A dialog appears, asking you to specify a name for the preset. The stored preset will then be available for selection from the pop-up menu for all instances of that MIDI plug-in, in all projects.
- To remove a stored preset, select it and click the (-) button to the right.

Managing plug-ins

Selecting Plug-in Information from the Devices menu opens a window in which all loaded plug-ins, audio and MIDI, are listed.

- To view the MIDI effect plug-ins, click the MIDI Plug-ins tab.

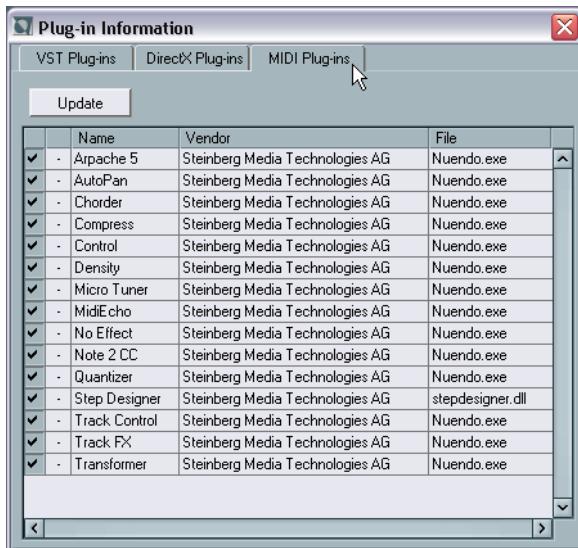


- The leftmost column allows you to deactivate plug-ins. This is useful if you have plug-ins installed that you don't want to use in Nuendo. Only plug-ins that are activated (ticked checkbox) will appear on the MIDI effect pop-up menus.
- The second column shows how many instances of each plug-in are currently used in the project.
- The remaining columns show various information about each plug-in and cannot be edited.

Merge MIDI in Loop

As mentioned, the parameters and effects described in this chapter do not change the MIDI events themselves, but work rather like “filters”, affecting the music on playback. However, sometimes you may want to make these settings permanent, i.e. convert them to “real” MIDI events on the track. You might for example want to transpose a track and then edit the transposed notes in a MIDI editor. For this, you need to use the Merge MIDI in Loop function on the MIDI menu. This combines all MIDI events on all unmuted tracks, applies track parameters and effects and generates a new MIDI part, containing all the events as you would hear them play back.

1. Make sure only the desired MIDI track(s) are unmuted.
If you only want to include events from a single track in the Merge operation, you may want to solo the track.
2. Set up the left and right locator around the area you want to merge.
Only events starting within this cycle area will be included.
3. Select the track on which you want the new part to be created.
This could be a new track or an existing track. If there are data in the cycle area on the track, you can choose whether this should be kept or overwritten (see below).
4. Select Merge MIDI in Loop from the MIDI menu.

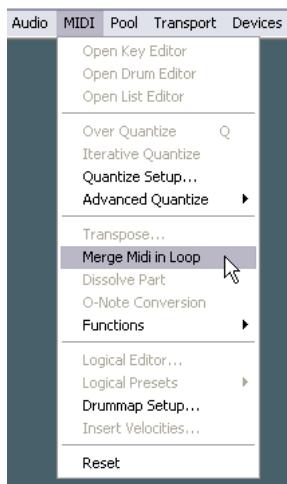

5. Fill in the dialog that appears.

The options in the dialog are:

Option	Description
Include Inserts	If this is activated, any MIDI insert effects activated for the track(s) will be applied.
Include Sends	If this is activated, any MIDI send effects activated for the track(s) will be applied.
Erase Destination	If this is activated, all MIDI data between the left and right locator on the destination track will be deleted.

6. Click OK.

A new part is created between the locators on the destination track, containing the processed MIDI events.

Applying effects to a single part

Normally, the MIDI track parameters and effects affect a whole MIDI track. This may not always be what you want – you may want to apply some MIDI effects to a single part for example (without having to create a separate track for that part only). The Merge MIDI in Loop function can help:

1. Set up your track parameters and MIDI effects the way you want them for the part.

This will of course affect the whole track, but focus on the part for now.

2. Set the locators to encompass the part.

This is easiest done by selecting the part and selecting Locators to Selection from the Transport menu (or using the corresponding key command, by default [P]).

3. Make sure the track holding the part is selected in the Track list.

4. Select Merge MIDI in Loop.

5. In the dialog that appears, activate the desired effect options, make sure that Erase Destination is activated and click OK.

Now a new part is created on the same track, containing the processed events. The original part is deleted.

6. Turn off or reset all track parameters and effects, so that the track plays back as usual.

21

MIDI processing and quantizing

Introduction

This chapter describes the various MIDI processing functions available on the MIDI menu. These offer various ways to change MIDI notes and other events, in the Project window or within a MIDI editor.

MIDI functions vs. track parameters

In some cases, the result of a MIDI function can also be obtained by using MIDI track parameters and effects (see [page 450](#)). For example, the MIDI functions transpose and quantize are also available as a track parameter and a MIDI effect, respectively. The main difference is that track parameters don't affect the actual MIDI events on the track in any way, while MIDI functions change the events "permanently" (although recent changes can be undone). Use the following guidelines to decide which path to choose:

- If you want to adjust a few parts or events only, use MIDI functions. The track parameters and effects affect the output of the whole track (although they can be made permanent in a specific area with the Merge MIDI in Loop function).
- If you want to experiment with different settings, track parameters can be the best way to go.
- Track parameter settings are not reflected in the MIDI editors, since the actual MIDI events aren't affected. This can be potentially confusing; if you've e.g. transposed notes using track parameters, the MIDI editors will still show the notes with their original pitch (but they will play back at their transposed pitch). MIDI functions can be a better way in those cases.

Of course, there are also MIDI functions that have no track parameter counterpart, and vice versa.

What is affected by the MIDI functions?

Which events are affected when you use a MIDI function depends on the function, the active window and the current selection:

- A MIDI function may only apply to MIDI events of a certain type.
For example, quantization affects notes only, while the Delete Controllers function obviously applies to MIDI controller events.
- In the Project window, the MIDI functions apply to all selected parts, affecting all events (of the relevant types) in them.
- In the MIDI editors, the MIDI functions apply to all selected events. If no events are selected, all events in the edited part(s) will be affected.

Quantizing

What is quantizing?

Quantizing in its fundamental form is a function that automatically moves recorded notes, positioning them on exact note values:

For example, if you record a series of eighth notes, some of them may end up slightly beside the exact eighth note positions.



Quantizing the notes with the quantize grid set to eighth notes will move the “misplaced” notes to exact positions.




However, quantizing is not only a method of correcting errors, it can also be used creatively in various ways. For example, the “quantize grid” does not have to consist of perfectly straight notes, some notes can automatically be excluded from quantizing, etc.


- **When quantizing MIDI, only notes are affected (not other event types).**
It is also possible to quantize audio events, which is especially useful when working with Nuendo’s loop slicing features – see [page 402](#).

Setting Up

At its most basic, setting up quantizing consists of selecting a note value from the Quantize pop-up menu on the toolbar (in the Project window or a MIDI editor).

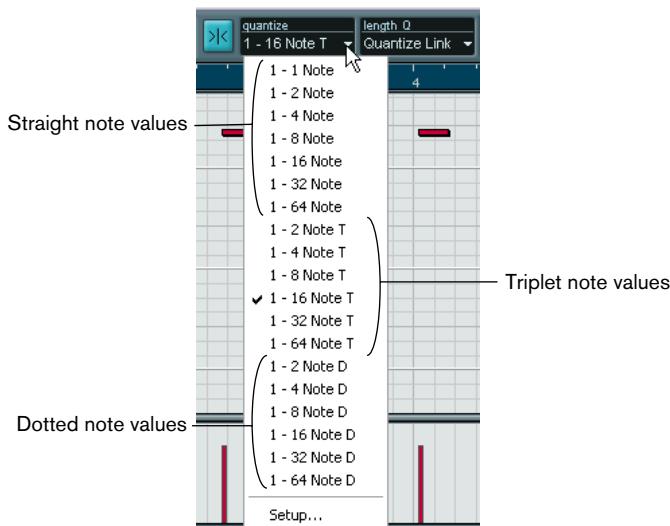

By default, this allows you to quantize to exact note values (straight, triplet or dotted notes) only. If you want more options, select “Quantize Setup...” from the MIDI menu (or “Setup...” from the Quantize pop-up menu) to open the Quantize Setup dialog.

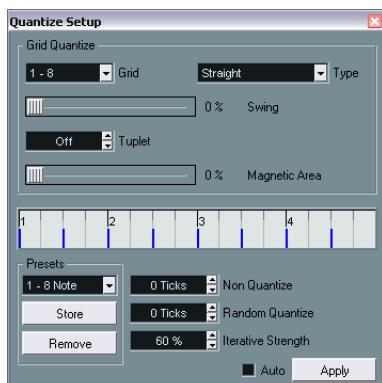

- Any settings you make in the dialog are immediately reflected in the Quantize pop-up menus. However, if you want your settings permanently available on the Quantize pop-up menus, you have to use the Presets functions (see [page 472](#)).

The dialog contains the following settings:


Grid display



The grid display shows one bar (four beats), with blue lines indicating the quantize grid (the positions that notes will be moved to).

The Grid and Type pop-ups



These are used to determine the basic note value for the quantizing grid. In other words, these have the same functionality as the Quantize pop-up menu on the toolbar.



Eighth note triplets selected as quantizing grid.

Swing

The Swing slider is only available when a straight note value is selected for the grid and Tuplet is off (see below). It lets you offset every second position in the grid, creating a swing or shuffle feel. When you adjust the Swing slider, the result is shown in the grid display below.

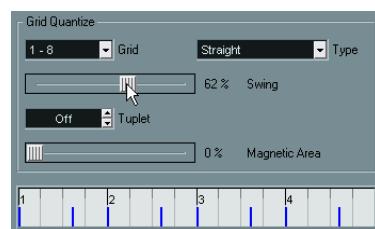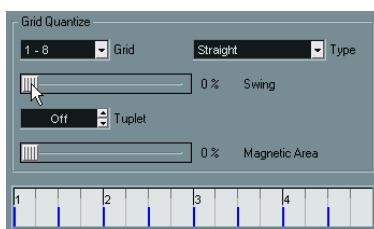

A straight eighth note grid compared with a grid with 62% swing.


Tuplet

Allows you to create more rhythmically complex grids, by dividing the grid into smaller steps.

Magnetic Area

This allows you to specify that only notes within a certain distance from the grid lines should be affected by quantizing.

- When the slider is set to 0%, the Magnetic Area function is deactivated, i.e. all notes are affected by quantizing.
If you move the slider gradually to the right, you will note how the magnetic areas are shown around the blue lines in the grid display.

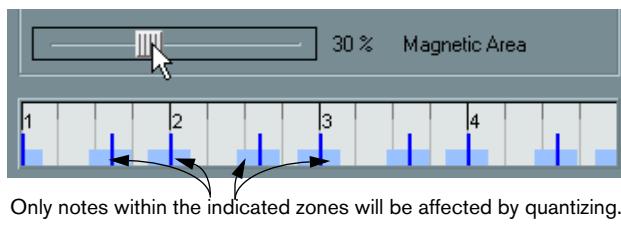

Only notes within the indicated zones will be affected by quantizing.

Presets

The controls in the lower left corner of the dialog allow you to store the current settings as a Preset, available on the Quantize menus in the toolbars. The usual Preset procedures apply:

- To store the settings as a Preset, click the Store button.
- To “load” a stored Preset, showing the stored settings in the dialog, just select it from the pop-up menu.
This is useful if you want to modify an existing Preset.
- To rename the selected Preset, double click on the name and type in a new one.
- To remove a stored Preset, select it from the pop-up menu and click Remove.
- You can also create Presets by having the program analyze an audio event and extract the groove in the audio.**

See [page 417](#).

Auto and Apply

These functions allow you to apply quantizing directly from the dialog, as described below.

- If you don't want to apply the quantizing you have set up in the dialog, you can close the window by clicking its standard close box. You can also leave the dialog open while you continue working.

The Non Quantize setting

This is an additional setting that affects the result of the quantizing. It allows you to set a “distance” in ticks (120ths of sixteenth notes).



Events that already are within the specified distance from the quantize grid will not be quantized. This allows you to keep slight variations when you quantize, but still correct notes that are too far from the grid.

The Random Quantize setting

This is an additional setting that affects the result of the quantizing. It allows you to set a “distance” in ticks (120ths of sixteenth notes).

Events will be quantized to random positions within the specified “distance” from the quantize grid, thus creating a more “loose” quantizing. Much like the Non Quantize setting, this allows for slight variations, while at the same time keeping notes from ending up too far from the grid.

The Iterative Strength setting

This affects the results of the Iterative Quantize function, as described below.

Extracting a groove

You can extract the groove from an audio event or MIDI part and turn it into a Quantize preset:

- To extract the groove from an audio event, you use Hitpoints and the “Create Groove Quantize” function (see [page 417](#)).
- To extract the groove from a MIDI part, you select the part and select “Part to Groove” from the Advanced Quantize submenu on the MIDI menu.

In both cases, the resulting groove appears on the Quantize menus and you apply it as you would any Quantize preset. You can also view and edit the resulting quantize settings in the Quantize Setup dialog.

Applying quantize

There are several ways to apply the quantize:

- The standard method is to select “Over Quantize” from the MIDI menu (or using a key command, by default [Q]).
This quantizes the selected MIDI parts or notes, according to the current Quantize pop-up menu setting.
- You can also apply quantizing directly from the Quantize Setup dialog, by clicking the “Apply” button.

- If you activate the “Auto” checkbox in the Quantize Setup dialog, any change you make in the dialog is immediately applied to the selected MIDI parts or notes.

A great way of using this feature is to set up a playback loop, and adjust the settings in the dialog until you get the desired result.

-
- When you apply quantize, the result is based on the original position of the notes. Therefore, you can freely try different quantize settings with no risk of “destroying” anything. See also Undo and Freeze Quantize on [page 477](#).

The Auto Quantize function


If you activate the Auto Q button on the Transport panel, all MIDI recordings you make are automatically quantized according to the settings you have made in the Quantize Setup dialog.

Iterative Quantize

Another way to apply “loose” quantization is to use the Iterative Quantize function on the MIDI menu. It works like this:

Instead of moving a note to the closest quantize grid position, Iterative Quantize moves it only part of the way. You specify how much the notes should be moved towards the grid with the Iterative Strength setting in the Quantize Setup dialog.


Iterative Quantize is also different from “regular” quantization, in that the operation is not based on the notes’ original positions but on their current, quantized position. This makes it possible to repeatedly use Iterative Quantize, gradually moving the notes closer to the quantize grid until you’ve find the desired timing.

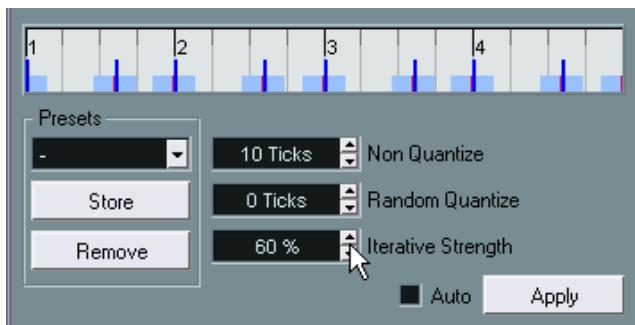

Quantize Lengths

- This function is only available from within the MIDI editors.

This function (on the Advanced Quantize submenu on the MIDI menu) will quantize the length of the notes, without changing their start positions. At its most basic level, this function will set the length of the notes to the Length Quantize value on the MIDI editors’ toolbar. However, if you have selected the “Quantize Link” option on the Length Quantize pop-up menu, the function will resize the note according to the quantize grid, taking the Swing, Tuple and Magnetic Area settings into account. An example:




1. Length Quantize set to "Quantize Link".



2. Some notes, all a 1/16th note of length.



3. Here, the quantize value has been set to straight 1/16th notes with Swing at 100%. Since Snap is activated (see [page 547](#)), the quantize grid is reflected in the note display's grid.

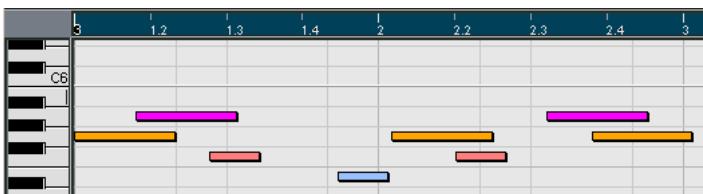

4. Selecting Quantize Lengths will adjust the note lengths according to the grid. If you compare the result to the first figure above, you will find that notes that started within the odd sixteenth note "zones" got the longer grid length, and notes in the even zones got the shorter length.

Quantize Ends

The Quantize Ends function on the Advanced Quantize submenu will only affect the end positions of notes. Apart from that, it works just like regular quantizing, taking the Quantize pop-up menu setting into account.

Undo and Freeze Quantize


As mentioned above, the original position of each quantized note is stored. Therefore, you can make the selected MIDI notes revert to their original, unquantized state at any time, by selecting Undo Quantize from the Advanced Quantize submenu. This is independent from the regular Undo History.

However, there may be situations when you want to make the quantized positions “permanent”. For example, you may want to quantize notes a second time, having the results based on the current quantized positions rather than the original positions. To make this possible, select the notes in question and select “Freeze Quantize” from the Advanced Quantize submenu. This makes the quantized positions permanent.

-
- After you have performed a Freeze Quantize for a note, you cannot undo its quantization.
-

Transpose

The Transpose item on the MIDI menu opens a dialog with settings for transposing the selected notes:

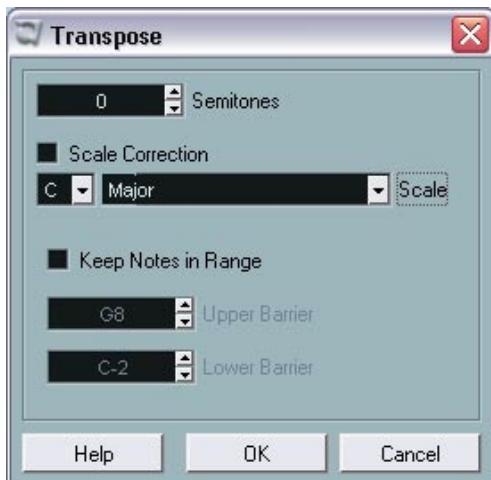

Semitones

This is where you set the amount of transposition.

Scale Correction

Scale Correction transposes the selected notes by forcing them to the closest note of the selected scale type. This can be used for creating interesting key and tonal changes, either by itself or in conjunction with the other settings in the Transpose dialog.

- To activate Scale Correction, click the checkbox.
- Select a root note for the scale from the note drop-down menu.
Make sure to select the correct root note if you want to keep the result in the same key as the original notes, or select an entirely different key if you want to experiment.
- Select the desired scale type from the Scale drop-down menu.

Keep Notes in Range

When this checkbox is activated, transposed notes will remain within the Upper and Lower Barrier values.

- If a note ends up outside the barriers after transposition, it will be shifted to another octave, keeping the correct transposed pitch if possible. If this isn't possible (if you have set a very narrow range between the Upper and Lower Barrier), the note will be transposed "as far as possible", i.e. to the Upper or Lower Barrier note. If you set the Upper and Lower Barriers to the same value, all notes will be transposed to this pitch!


OK and Cancel

Clicking OK performs the transposition. Clicking Cancel closes the dialog without transposing.


Other MIDI menu functions

The following items can be found on the MIDI menu–Functions submenu:

Legato

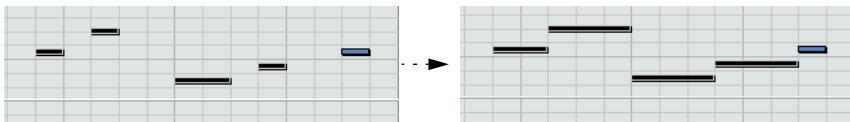

Extends each selected note so that it reaches the next note. You can specify the desired gap or overlap with the “Legato Overlap” setting in the Preferences dialog (Editing page).

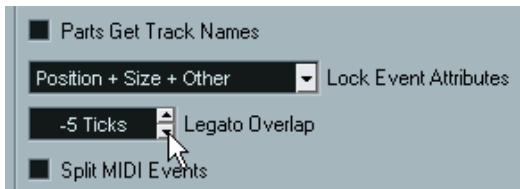

When using Legato with this setting, each note will be extended to end 5 ticks before the next note.

Fixed Lengths

-
- This function is only available from within the MIDI editors.
-

This function resizes all selected notes to the length set with the Length Quantize pop-up menu on the MIDI editor toolbar.

Delete Doubles

This function removes double notes, i.e. notes of the same pitch on the exact same position. Double notes can occur when recording in Cycle mode, after Quantizing, etc.

-
- This function always affects whole MIDI parts.
-

Delete Controllers

This function removes all MIDI controllers from the selected MIDI parts.

-
- This function always affects whole MIDI parts.
-


Delete Continuous Controllers

This function removes all “continuous” MIDI controller events from the selected MIDI parts. That is, “on/off” events such as sustain pedal events are not removed.

-
- This function always affects whole MIDI parts.
-

Delete Notes

Allows you to delete very short or weak notes. This is useful for automatically removing unwanted “ghost notes” after recording. Selecting “Delete Notes...” opens a dialog in which you set up the criteria for the function:

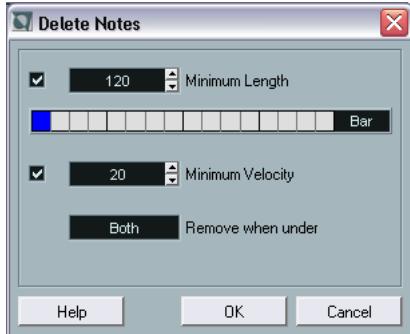

The parameters have the following functionality:

Minimum Length

When the Minimum Length checkbox is activated, the note length is taken into account, allowing you to remove short notes. You can either specify the minimum length (for notes to be kept) in the value display or by dragging the blue line in the graphical length display below.

- The graphical length display can correspond to 1/4 bar, one bar, two bars or four bars.

You change this setting by clicking in the field to the right of the display.



In this case, the whole length display corresponds to one bar, and the Minimum Length is set to 1/32nd notes (60 ticks).

Minimum Velocity

When the Minimum Velocity checkbox is activated, the velocity of notes is taken into account, allowing you to remove weak notes. You specify the minimum velocity (for notes to be kept) in the value display.

Remove when under

This setting is only available when both Minimum Length and Minimum Velocity is activated. By clicking the value display, you select whether both length and velocity criteria must be met for notes to be deleted, or whether one of the criteria will suffice.

OK and Cancel

Clicking OK performs the automatic delete according to the rules set up. Clicking Cancel closes the dialog without deleting notes.

Restrict Polyphony

Selecting this item opens a dialog in which you can specify how many "voices" should be used (for the selected notes or parts). Restricting the polyphony this way is useful when you have an instrument with limited polyphony and want to make sure all notes will be played. The effect is achieved by shortening notes as required, so that they end before the next note starts.

Pedals to Note Length

This function scans for Sustain pedal on/off events, lengthens the affected notes to match the Sustain pedal off position, and then removes the Sustain Controller on/off events.

Delete Overlaps (mono)


This function allows you to make sure that no two notes of the same pitch overlap (i.e. that one starts before the other ends). Overlapping notes of the same pitch can confuse some MIDI instruments (a new Note On is transmitted before the Note Off is transmitted). This command can then be used to automatically rectify the problem.

Delete Overlaps (poly)

This function shortens notes when required, so that no note begins before another ends. This happens regardless of which pitch the notes have.

Velocity

This function opens a dialog that allows you to manipulate the velocity of notes in various ways.

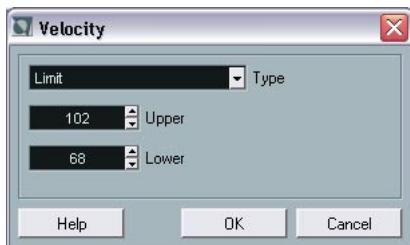

To apply the function, select one of the three processing types from the Type pop-up, adjust the settings and click OK (to close the dialog without applying, click Cancel).

The following types of velocity processing are available:

Add/Subtract

This simply adds a fixed number to the existing velocity values. You set the value (positive or negative) with the Amount parameter.

Compress/Expand

Compresses or expands the “dynamic range” of MIDI notes by scaling the velocity values according to the Ratio setting (0 - 300%). The principle behind this is that multiplying different velocity values with a factor higher than 1 (over 100%) will also make the differences between velocity values greater, while using a factor lower than 1 (under 100%) will make the differences smaller. In short:

- To compress (“even out” velocity differences), use ratio values below 100%.

After compression, you would probably want to add a velocity amount (with the Add/Subtract function) to maintain the average velocity level.

- To expand (create greater difference in velocity), use ratio values above 100%.

Before you expand, you may want to adjust the velocity with the Add/Subtract function, so that the average velocity is somewhere in the middle of the range. If the average velocity is high (near 127) or low (near 0), expansion will not work properly, simply because velocity values can only be between 0 and 127!

Limit

This function allows you to make sure that no velocity values fall outside a given range (the Lower and Upper values). Any velocity values outside this range are raised/lowered to exactly the Lower/Upper values.

Fixed Velocity

This function sets the velocity of all selected notes to the Insert Velocity value on the toolbar in the MIDI editors.

Reverse

This function inverts the order of the selected events (or of all events in the selected parts), causing the MIDI music to play backwards.

Note though, that the effect is different from reversing an audio recording. With MIDI, the individual notes will still play as usual in the MIDI instrument – it’s only the order of playback that is changed.

Dissolve Part

The Dissolve Part function on the MIDI menu has two separate uses:

- When you work with MIDI parts (on MIDI channel "Any") containing events on different MIDI channels.
Dissolve Part separates the events according to MIDI channel.
- When you want to separate MIDI events according to pitch.
A typical example would be drum and percussion tracks, where each pitch usually corresponds to a separate drum sound.

Dissolving parts into separate channels

Setting a track to MIDI channel "Any" will cause each MIDI event to play back on its original MIDI channel, rather than a channel set for the whole track. There are two main situations when "Any" channel tracks are useful:

- When you record several MIDI channels at the same time.
You may for example have a MIDI keyboard with several keyboard zones, where each zone sends MIDI on a separate channel. Recording on an "Any" channel track allows you to play back the recording with different sounds for each zone (since the different MIDI notes play back on separate MIDI channels).
- When you have imported a MIDI file of Type 0.
MIDI files of Type 0 contain only one track, with notes on up to 16 different MIDI channels. If you were to set this track to a specific MIDI channel, all notes in the MIDI file would be played back with the same sound; setting the track to "Any" will cause the imported file to play back as intended.

The Dissolve Part function scans MIDI parts for events on different MIDI channels and distributes the events into new parts on new tracks, one for each MIDI channel found. This allows you to work with each musical part individually. Proceed as follows:

1. Select the part(s) containing MIDI data on different channels.
2. Select "Dissolve Part" from the MIDI menu.
3. In the dialog that appears, select the "Separate Channels" option.

Now, for each MIDI channel used in the selected part(s), a new MIDI track is created and set to the corresponding MIDI channel. Each event is then copied into the part on the track with the corresponding MIDI channel. Finally, the original part(s) are muted.

An example:

This part contains events on MIDI channel 1, 2 and 3.



Selecting “Dissolve Part” creates new parts on new tracks, set to channel 1, 2 and 3. Each new part contains only the events on the respective MIDI channel.



The original MIDI part is muted.

Dissolving parts into separate pitches

The Dissolve Part function can also scan MIDI parts for events of different pitch, and distribute the events into new parts on new tracks, one for each pitch. This is useful when the different pitches are not used in a regular melodic context, but rather for separating different sounds (e.g. MIDI drum tracks or sampler sound FX tracks). By dissolving such parts, you can work with each sound individually, on a separate track. Proceed as follows:

1. Select the part(s) containing MIDI data.
2. Select “Dissolve Part” from the MIDI menu.
3. In the dialog that appears, select the “Separate Pitches” option.

A new MIDI track is created for each used pitch in the selected part(s). The events are then copied into the parts on the track for the corresponding pitch. Finally, the original part(s) are muted.

22

The MIDI editors

About editing MIDI

There are several ways to edit MIDI in Nuendo. You can use the tools and functions in the Project window for large-scale editing, or use the functions on the MIDI menu to process MIDI parts in various ways (see [page 468](#)). For hands-on graphical editing of the contents of MIDI parts, you use the MIDI editors:

- **The Key Editor is the default MIDI editor, presenting notes graphically in an intuitive piano roll-style grid.**
The Key Editor also allows for detailed editing of non-note events such as MIDI controllers.
- **The Drum Editor is similar to the Key Editor, but takes advantage of the fact that with drum parts, each key corresponds to a separate drum sound.**
This is the editor to use when you're editing drum or percussion parts.
- **The List Editor shows all events in the selected MIDI parts as a list, allowing you to view and edit their properties numerically.**
- **The Score Editor shows MIDI notes as a musical score and comes with advanced tools and functions for notation, layout and printing.**
The Score Editor is described in the separate document "Score Layout and Printing". However, even if your focus is on creating printed scores we recommend that you study this chapter as well, to get a grip on the common MIDI editing procedures.
- **Finally, you can also edit MIDI in the Project Browser.**
Like the List Editor, this shows the events in a list and allows you to perform numerical editing. However, you will probably find the List Editor more suited for MIDI editing, since it has various dedicated features and functions for this. The Project Browser is described on [page 575](#).

About this chapter


This chapter describes how to use the Key, Drum and List Editors. Please note that a lot of features are identical in these editors (especially in the Key and Drum Editors) – they are all described in the Key Editor section. The sections about the Drum Editor (see [page 523](#)) and the List Editor (see [page 538](#)) describe the specific features of these editors only.

Opening a MIDI editor

There are two ways to open a MIDI editor:

- Select one or several parts (or a MIDI track, with no parts selected) and select Open Key Editor, Open Score Editor, Open Drum Editor or Open List Editor from the MIDI menu (or use the corresponding key command).
The selected parts (or all parts on the track, if no part was selected) will open in the chosen editor.
- Double click a part.

Which editor opens depends on the settings in the Preferences dialog (Event Display–MIDI page):

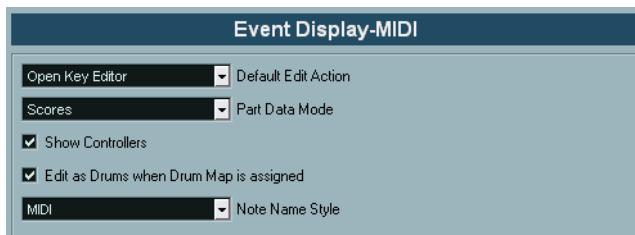

Double clicking will open the editor selected on the Default Edit Action pop-up menu. However, if the option “Edit as Drums when Drum Map is assigned” is activated and a drum map is selected for the edited track (see [page 534](#)), the Drum Editor will open. This way you can double click to open the Key Editor (or the Score Editor or List Editor, depending on your preferences) but drum tracks will automatically open in the Drum Editor.

- **If the part you open for editing is a shared copy, any editing you perform will affect all shared copies of this part.**

Shared copies are created by pressing [Alt]/[Option]+[Shift] and dragging, or by using the Repeat function with the “Shared copies” option activated. In the Project window, shared copies are indicated by an “s” icon in the right corner of the part (see [page 119](#)).

Handling several parts

When you open a MIDI editor with several parts (or a MIDI track containing several parts) selected, you might find it somewhat hard to get an overlook of the different parts when editing.

If so, the editor toolbar features a few functions to make working with multiple parts easier and more comprehensive:

- The Part List menu lists all parts that were selected when you opened the editor (or all parts on the track, if no parts were selected), and lets you select which part should be active for editing.

When you select a part from the list, it is automatically made active and centered in the note display.



- Note that it is also possible to activate a part by using the Arrow tool and clicking on an event in a part.
- The button “Edit Active Part Only” lets you restrict editing operations to the active part only.

If you for example select “All” from the Select submenu on the Edit menu with this option activated, only events in the active part will be selected. Similarly, if you select notes by dragging with the Arrow tool (making a selection rectangle), only the notes in the active part will be selected.



“Edit Active Part Only” activated on the toolbar.

- You can zoom in on the active part so that it fills the screen by selecting “Zoom to Event” from the Zoom submenu on the Edit menu.


- The button “Show Part Borders” can be used if you want to see clearly defined borders for the active part.
When this is activated, all parts except the active one are grayed out, making the borders easily discernible. In the Key Editor, there are also two “markers” in the ruler with the name of the active part, marking its beginning and end. These can be moved freely to change the size of the part.



“Show Part Borders” activated on the toolbar.


- It is possible to cycle between parts, making them active, with key commands.
In the Key Commands dialog – Edit category, there are two functions: “Activate Next Part” and “Activate Previous Part”. If you assign key commands to these, you can use them to cycle between parts in the editors. Please refer to [page 729](#) for instructions on how to set up key commands.

The Key Editor - Overview

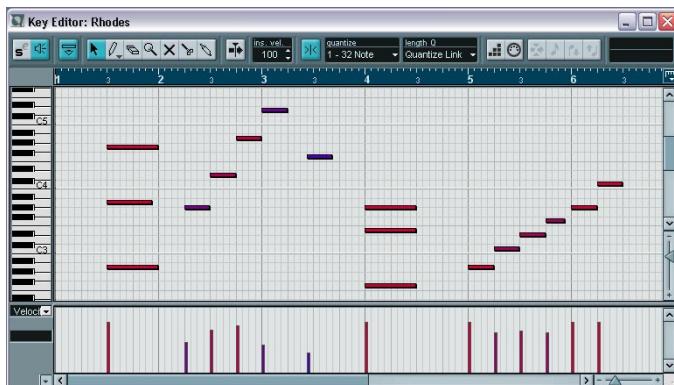

The toolbar

As in other windows, the toolbar contains tools and various settings. The user can configure what toolbar items should be shown or hidden and store/recall different toolbar configurations – see [page 712](#).

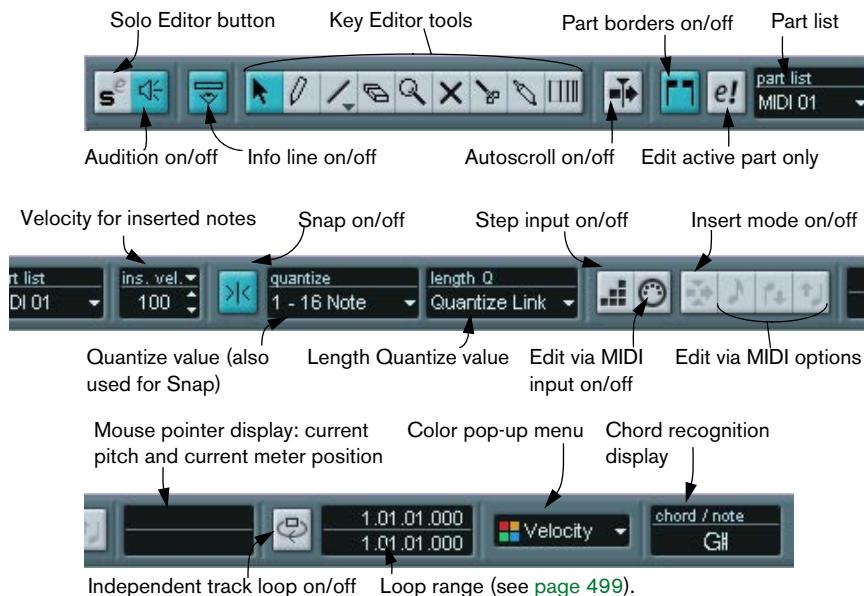

The info line

Start Position	End	Length	Pitch	Velocity	Channel
2.01.01.000	2.01.03.000	0.0.2.0	E3	100	2


The info line shows information about selected MIDI notes. You can edit all values on the info line using regular value editing (see [page 508](#) for details). Length and position values are displayed in the format currently selected for the ruler (see below).

- To hide or show the info line, click the icon in the toolbar.

The ruler

The ruler shows the time line, by default in the display format selected on the Transport panel. You can select a separate format for a MIDI editor ruler by clicking the arrow button to the right of it and selecting an option from the pop-up menu that appears. For a list of the available formats, see [page 94](#).


At the bottom of the pop-up menu there are two additional items:

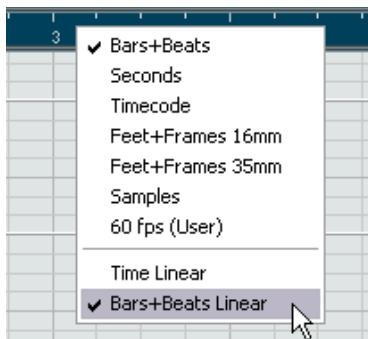

- If "Time Linear" is selected, the ruler, note display and controller display will be linear in relation to time.
This means that if the ruler shows bars and beats, the distance between the bar lines will vary depending on the tempo.
- If "Bars+Beats Linear" is selected, the ruler, note display and controller display will be linear in relation to tempo.
I.e. if the ruler shows bars and beats, the distance between beats will be constant.

In most cases, you would probably set the display format to "Bars+Beats" in "Bars+Beats Linear" mode when editing MIDI.


The note display

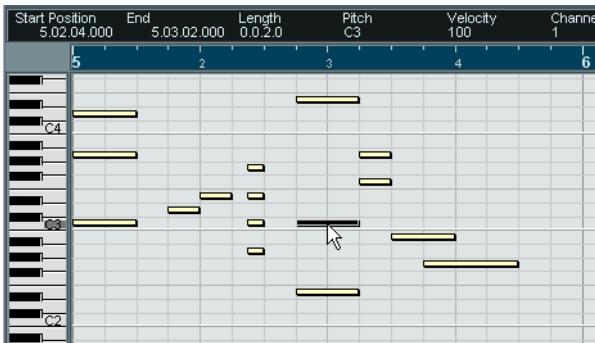

The note display is the main area in the Key Editor. It contains a grid, in which MIDI notes are shown as boxes. The width of a box corresponds to the note length, and the vertical position of a box corresponds to the note number (pitch), with higher notes higher up in the grid. The piano keyboard to the left serves as a guide for finding the right note number.


The chord recognition function

Nuendo features a handy chord recognition function that helps you identify chords in the key editor note display. To find out which chord some simultaneously played notes make up, place the project cursor over the notes. All MIDI notes currently “touched” by the project cursor are analyzed and the chord recognition display in the toolbar shows you which chord the notes form.

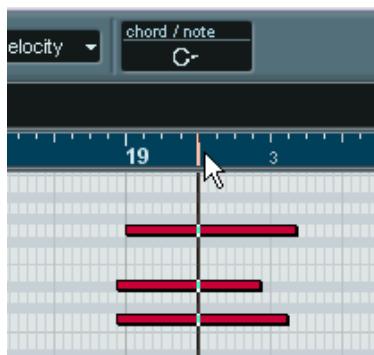

In the picture above, the project cursor touches the notes C, Eb and G. As shown in the chord recognition display, this results in a C minor chord.

The controller display




The area at the bottom of the Key Editor window is the controller display. This consists of one or several controller lanes, each showing one of the following properties or event types:

- Velocity values of the notes.
- Pitch Bend events.
- Aftertouch events.
- Poly Pressure events.
- Program Change events.
- Any type of continuous controller event.


To change the size of the controller display, drag the divider between the controller display and the note display. This will make the controller display larger and the note display smaller, or vice versa.

Velocity values are shown as vertical bars in the controller display, with higher bars corresponding to higher velocity values:

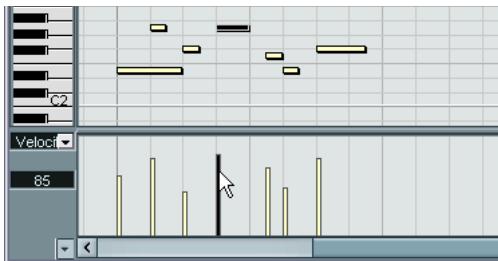


Each velocity bar corresponds to a note in the note display.

Events in the controller display (that is, anything other than velocity values) are shown as “blocks”, the heights of which correspond to the “values” of the events. However, events that have been recorded (or drawn with a low quantize value) may appear more like “filled curves”, simply because they are positioned very closely:

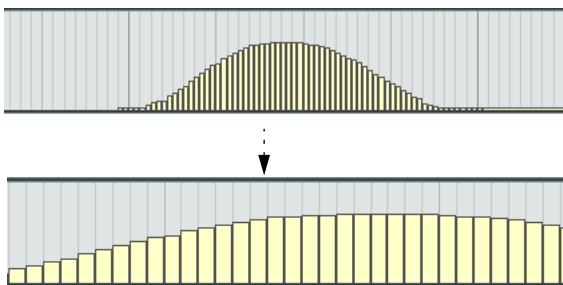

If you zoom in on the upper “curve”, you will find that it consists of separate events.

- Unlike notes, events in the controller display have no length. The value of an event in the display is “valid” until the start of the next event:

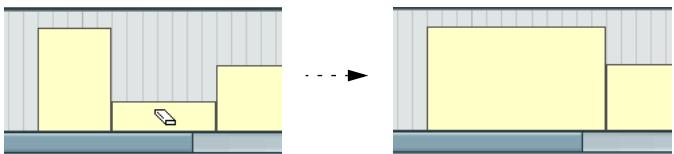

If you delete the second event...

...the first event will be “valid” until the start of the third event.

For a description of editing in the controller display, see [page 512](#).

Key Editor operations

Zooming

Zooming in the Key Editor is done according to the standard zoom procedures, using the zoom sliders, the Zoom tool or the Zoom submenu on the Edit menu.

- When you drag a rectangle with the Zoom tool, the result depends on the option “Zoom Tool Standard Mode: Horizontal Zooming Only” in the Preferences dialog (Editing page). If this is on, the window will only be zoomed horizontally; if not, the window will be zoomed both horizontally and vertically.

Playing back

You can play back your music as usual when working in a MIDI editor. There are a couple of features making it easier to edit during playback:

Solo button



If you activate the Solo button, only the edited MIDI parts will be heard during regular playback.

Autoscroll



As described on [page 140](#), the Autoscroll function makes the window “follow” the project cursor during playback, so that the current play position is visible at all times. However, when you are working in a MIDI editor, you may want to deactivate Autoscroll – this way, the events you are working with will stay visible.

The Autoscroll button on the toolbar of each MIDI editor is independent for the editor. For example, this means you can have Autoscroll deactivated in the Key Editor and activated in the Project window.

The independent track loop function

The independent track loop is a sort of “mini-cycle”, affecting only the MIDI part being edited. When the loop is activated, the MIDI events within the loop will be repeated continuously and completely independent – other events (on other tracks) will be played back as usual. The only “interaction” between the loop and the “regular playback” is that every time the cycle starts over again, so does the loop.

To set up the independent track loop, proceed as follows:

1. Turn on the loop by clicking on the Loop button on the toolbar. If it isn't visible, you need to right-click (Windows) or [Ctrl]-click (Mac) the toolbar and add the Independent Track Loop Settings section – see [page 712](#).



When the loop is activated, the cycle isn't shown in the editor's ruler. Now you need to specify the length of the loop:

2. Either [Ctrl]/[Command]-click and [Alt]/[Option]-click in the ruler to set the start and end of the loop, respectively...
3. ...or edit the loop start and end positions numerically in the fields next to the Loop button.

The independent track loop is indicated in dark blue in the ruler.

- The MIDI events will be looped as long as the Loop button is activated and the MIDI editor window is open.

Auditioning



If the speaker icon on the toolbar is activated, individual notes will automatically be played back (auditioned) when you move or transpose them, or when you create new notes by drawing. This makes it easier to hear what you're doing.


Creating and editing notes

Drawing notes with the Pencil tool

With the Pencil tool, you insert single notes by clicking at the desired time position (horizontal) and pitch position (vertical).

- When you move the pointer in the note display, its bar position is indicated in the toolbar, and its pitch is indicated both in the toolbar and on the piano keyboard to the left.

This makes it easy to find the right note and insert position.

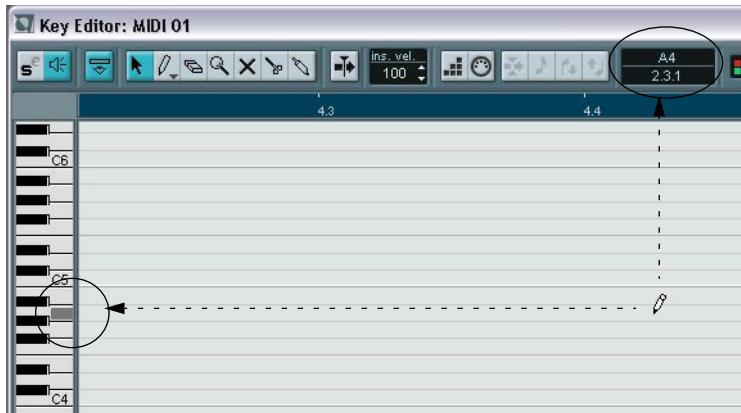


- If Snap is activated, this determines the start position of the created note (see [page 547](#)).
- If you just click once, the created note will have the length set on the Length Quantize pop-up menu on the toolbar.
You can create a longer note by clicking and dragging the pointer with the mouse button pressed. The length of the created note will be a multiple of the Length Quantize value.
- The notes will get the Insert Velocity value set on the toolbar.

Drawing notes with the Line tool

The Line tool can be used for creating series of contiguous notes. To use the Line tool, click and drag to draw a line and then release the mouse button.

- **The Line tool has several different modes.**

To select one of the modes, click on the Line tool icon on the toolbar when the tool is already selected. This opens a pop-up menu from which you can select one of the Line modes.



The tool icon will change appearance according to the selected mode.

Mode	Description
Line	This is the default mode for the Line tool. When this mode is selected, you click and drag to create a straight line, in any angle. When you release the mouse button a series of notes will be created, aligned with the line. If Snap is activated, the notes will be spaced and sized according to the Quantize value.
Parabola, Sine, Triangle, Square	These modes insert events along different curve shapes. While they can be used for creating notes, they're probably best suited for controller editing (see page 517).
Paint	Allows you to insert multiple notes by dragging with the mouse button pressed. If Snap is activated, the notes will be positioned and sized according to the Quantize and Length Quantize values. If you press [Ctrl]/[Command] while painting, movement will be restricted to horizontal only (i.e. the painted notes will have the same pitch).


Setting velocity values

When you draw notes in the key editor, the notes will get the velocity value set in the insert velocity field on the toolbar.

You can use one of three different methods for determining the velocity:

- Selecting a predefined velocity value from the insert velocity pop-up menu.

The menu contains five different predefined velocity values. The “Setup...” item opens a dialog that allows you to specify which five velocity values should be available on the pop-up menu (you can also open this dialog by selecting “Insert Velocities...” from the MIDI menu).



- Manually entering the desired velocity value by clicking in the insert velocity field and typing the desired value.

- Using a key command.

You can assign a key command to each of the five available velocity values in the Key Commands dialog (MIDI category – the items Insert Velocity 1-5). This allows for quick switching between different velocity values when entering notes. See [page 729](#) for instructions on how to set up commands.

Selecting notes

Selecting notes is done using any of the following methods:

- Use the Arrow tool.


The standard selection techniques apply.

- Use the Select submenu on the Quick menu.

The Select menu options are:

Option	Description
All	Selects all notes in the edited part.
None	Deselects all events.
In Loop	Selects all notes that are partially or completely inside the boundaries of the left and right locator.
From Start to Cursor	Selects all notes that begin to the left of the project cursor.
From Cursor to End	Selects all notes that end to the right of the project cursor.
Equal Pitch – all Octaves	This function requires that a single note is selected. It selects all following notes that have the same pitch (in any octave) as the currently selected note.
Equal Pitch – same Octave	As above, but selects notes of the exact same pitch only (same octave).

- You can also use the left and right arrow keys on the computer keyboard to step from one note to the next or previous.
If you press [Shift] and use the arrow keys, the current selection will be kept, allowing you to select several notes.
- To select all notes of a certain pitch, press [Ctrl]/[Command] and click on the desired key in the keyboard display to the left.

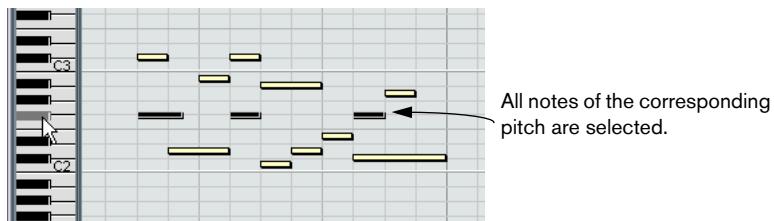

You can also press [Shift] and double click on a note to select all the *following* notes of the same pitch.

- If the option “Auto Select Events under Cursor” is activated in the Preferences dialog (Editing page), all notes currently “touched” by the project cursor are automatically selected.

Moving and transposing notes

To move notes in the editor, use any of the following methods:

- Click and drag to a new position.

All selected notes will be moved, maintaining their relative positions. If Snap is activated, this determines to which positions you can move the notes, see [page 547](#).

- Note also that you can restrict movement to horizontal or vertical only by holding down [Ctrl]/[Command] while dragging.
-

- Use the up and down arrow keys on the computer keyboard.

This method allows you to transpose the selected notes, without risking to move them horizontally. You can also use the Transpose function (see [page 477](#)) or the info line (see [page 493](#)) for this. Note that pressing [Shift] and using the up and down arrow keys will transpose notes in steps of one octave.

- Use the Move to Cursor function on the Edit menu.

This moves the selected notes to the project cursor position.

- Select a note and adjust its position or pitch on the info line.

See [page 508](#).

- Use the Move buttons in the Nudge palette on the toolbar.

This moves the selected note(s) by the amount set on the Quantize pop-up menu.

By default, the Nudge palette isn't shown on the toolbar – see [page 712](#) for more info.

You can also adjust the position of notes by quantizing (see [page 469](#)).

Duplicating and repeating notes

Notes are duplicated much in the same way as events in the Project window:

- Hold down [Alt]/[Option] and drag the note(s) to a new position.

If Snap is on, this determines to which positions you can copy notes (see [page 547](#)).

- Selecting Duplicate from the Edit menu creates a copy of the selected note and places it directly after the original.

If several notes are selected, all of these are copied “as one unit”, maintaining the relative distance between the notes.

- Selecting Repeat from the Edit menu opens a dialog, allowing you to create a number of copies of the selected note(s).


This works like the Duplicate function, but you can specify the number of copies.

Using cut and paste


You can use the Cut, Copy and Paste options on the Edit menu to move or copy material within a part or between different parts. When you paste copied notes, you can either use the regular Paste function or the Paste Time function on the Edit menu's Range submenu.

- “Paste” inserts the copied notes at the project cursor position, without affecting existing notes.
- “Paste Time” inserts at the project cursor position, but moves (and if necessary, splits) existing notes to make room for the pasted notes.

Selecting “Paste Time” with this data on the clipboard
and the project cursor here...

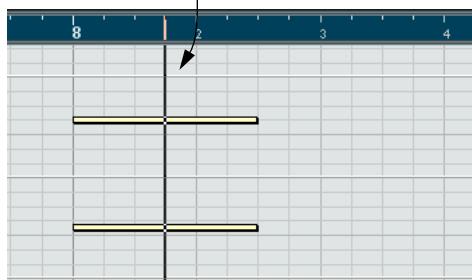

...will give you this:

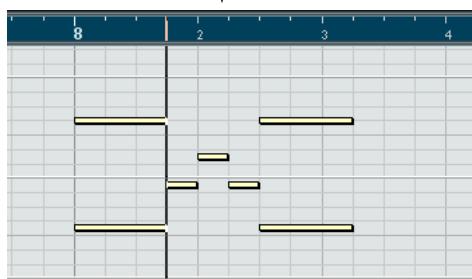

Resizing notes

To resize a note, use one of the following methods:

- Position the arrow tool at the start or end of the note, so that the pointer takes on the shape of a small double arrow. Click and drag to the left or right to resize the note.
This method allows you to resize the note from either direction.
- Click with the Pencil tool within the note box and drag to the left or the right (to make the note shorter or longer, respectively).

With both these methods, the resulting length will be a multiple of the Length Quantize value on the toolbar.

- Use the Trim Start/End buttons on the Nudge palette on the toolbar. This resizes the selected note(s) by moving their start or end positions, in steps according to the Length Quantize value on the toolbar. By default, the Nudge palette isn't shown on the toolbar – see [page 712](#) for more info.
- Select the note and adjust its length on the info line.
See [page 508](#) for details on info line editing.

Splitting notes

There are three ways to split notes:

- Clicking on a note with the Scissors tool splits the note at the position you pointed (taking the Snap setting into account if activated). If several notes are selected, they are all split at the same position if applicable.
- If you select “Split at Cursor”, all notes that are intersected by the project cursor are split at the cursor position.
- If you select “Split Loop”, all notes that are intersected by the left or right locator are split at the locator positions.

Gluing notes


Clicking on a note with the Glue Tube tool will “glue it together” with the next note of the same pitch. The result will be one long note spanning from the start of the first note to the end of the second note, and with the properties (velocity, etc.) of the first note.

Muting notes

Individual notes can be muted in the Key Editor, as opposed to muting an entire MIDI part in the Project window. This allows you to exclude notes from playback, but keep the option to bring them back again at any time. To mute a note, use one of the following methods:

- Click on it with the Mute tool.
- Drag a rectangle with the Mute tool, enclosing all notes you want to mute.
- Select the note(s) and choose Mute from the Edit menu.

The default key command for this is [Shift]+[M].



Muted notes are “dimmed” in the note display.


To unmute a note, either click it or enclose it with the Mute tool, or select it and choose Unmute from the Edit menu. The default key command for this is [Shift]+[U].

Deleting notes

To delete notes, either click on them with the Eraser tool or select them and press [Backspace].

Editing on the info line

The info line shows the values and properties of the selected event(s). If a single event is selected, its values are displayed on the info line. If several events are selected, the info line shows the values of the first of these events, in yellow.

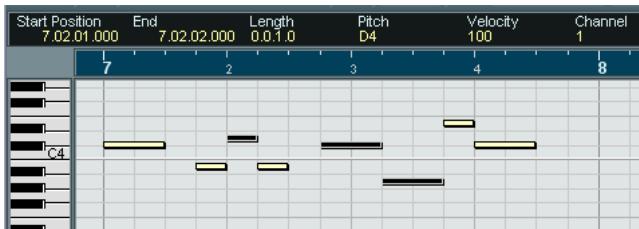

Several events selected.

You can edit the values on the info line using regular value editing. This allows you to move, resize, transpose or change velocity of events in a very precise manner.

- **If you have several events selected and change a value, all selected events will be changed relatively.**

In other words, the value will be changed by an equal amount for all selected events.

- **If you have several events selected, hold down [Ctrl]/[Command] and change a value, the change will be absolute.**

In other words, the value setting will be the same for all selected events.

Editing Notes via MIDI

You can change the properties of notes via MIDI. For example, this can be a fast way to get the right velocity value, since you will hear the result even as you edit:

1. Select the note you want to edit.
2. Click on the MIDI connector symbol on the toolbar.



The symbol should be lit. This enables editing via MIDI.

3. Use the note buttons on the toolbar to decide which properties should be changed by the MIDI input.

You can enable editing of pitch, note-on and/or note-off velocity.



With this setting, the edited notes will get the pitch and velocity values of the notes input via MIDI, but the note-off velocities will be kept as they are.

4. Play a note on your MIDI instrument.

The note selected in the editor will get the pitch, velocity and/or note-off velocity of the played note.

The next note in the edited part is automatically selected, making it easy to quickly edit a series of notes.

- If you want another try, select the note again (easiest by pressing the [←] key on the computer keyboard) and again play a note on your MIDI instrument.

Step input

Step input, or step recording, is when you enter notes one at a time (or one chord at a time) without worrying about the exact timing. This is useful e.g. when you know the part you want to record but are not able to play it exactly as you want it.

Proceed as follows:

1. Click the Step Input button on the toolbar to activate Step Input mode.




2. Use the note buttons to the right to decide which properties should be included when you input the notes.

For example, you may not want to include the velocity and/or note-off velocity of the played notes. It's also possible to turn off the pitch property, in which case all notes will get the pitch C3, no matter what you play.

3. Click anywhere in the note display to set the start position (the desired position of the first note or chord).

The step input position is shown as a blue line in the note display, and in the lower mouse pointer display in the toolbar.

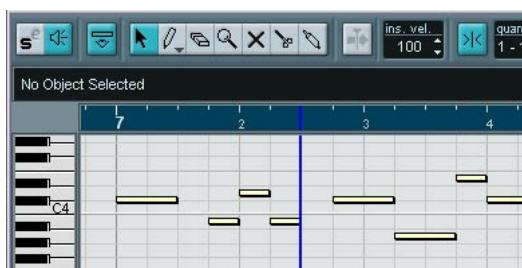

4. Specify the desired note spacing and length with the Quantize and Length Quantize pop-up menus.

The notes you input will be positioned according to the Quantize value and have the length set with the Length Quantize value. For instance, if you set Quantize to 1/8 notes and Length Quantize to 1/16 note, the notes will be sixteenth notes, appearing on each eighth note position.

- Play the first note or chord on your MIDI instrument.

The note or chord appears in the editor and the step input position advances one quantize value step.

- If Insert mode is activated, all notes to the right of the step input position will be moved to “make room” for the inserted note or chord.



Insert mode activated.

- Continue in the same way with the rest of the notes or chords.


You can adjust the Quantize or Length Quantize value as you go along, to change the timing or note lengths. You can also move the step input position manually by clicking anywhere in the note display.

- To insert a “rest”, press the right arrow key on the computer keyboard. This advances the step input position one step.
- When you’re done, click the Step Input button again to deactivate step input.

Editing in the controller display

About controller lanes

By default, the controller display has a single lane, showing one event type at a time. However, you can easily add lanes by right-clicking (Windows) or [Ctrl]-clicking (Mac) in the display and selecting “Create new controller lane” from the Quick menu. This allows you to view and edit different controllers at the same time.

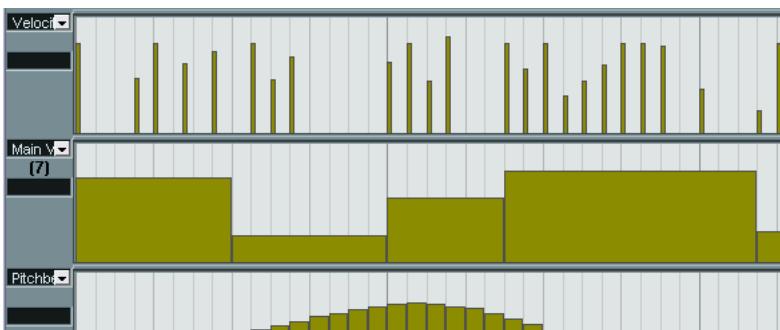

The controller display with three lanes set up.

- **To remove a lane, right-click in it and select “Remove this Lane” from the Quick menu.**


This hides the lane from view – it doesn’t affect the events in any way.

- **If you remove all lanes, the controller display will be completely hidden.**

To bring it back again, select “Create new controller lane” from the Quick menu.


Selecting event type

Each controller lane shows one event type at a time. To select which event type should be displayed, use the pop-up menu to the left of the lane.

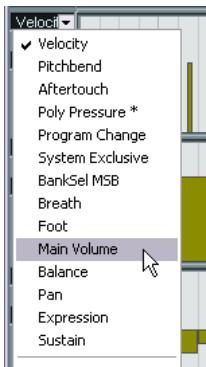

- Selecting “Setup...” opens a dialog in which you can specify which Continuous Controller event types you want available on the pop-up menu.

Controller types in this list are already listed on the pop-up menu.

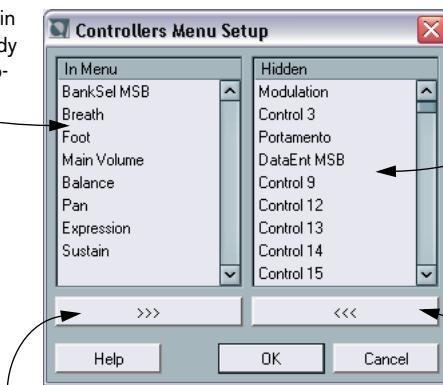

Controller types in this list are not listed on the pop-up menu.

Click this button to remove the controller type selected in the left list from the pop-up menu.

Click this button to add the selected controller type to the pop-up menu.

- Each MIDI track has its own controller lane setup (number of lanes and selected event types).

When you create new tracks, they get the controller lane setup last used.

Controller Lane Presets

Once you have added the required number of controller lanes and selected the event types you need, you can store this combination as a controller lane preset. You could for example have a preset with one velocity lane only, another with a combination of velocity, pitch bend and modulation, and so on. This can make working with controllers much quicker.

- To add the current controller lane setup as a preset, pull down the pop-up menu in the lower left corner of the editor window and select “Add”.


Enter a name for the preset in the dialog that appears and click OK.

- To apply a stored preset, select it from the pop-up menu.
This immediately brings up the controller lanes and event types in the preset.

- To remove or rename presets, select “Organize” from the pop-up.

Editing velocity values


When “Velocity” is selected for viewing, the lane shows the velocity of each note as a vertical bar.

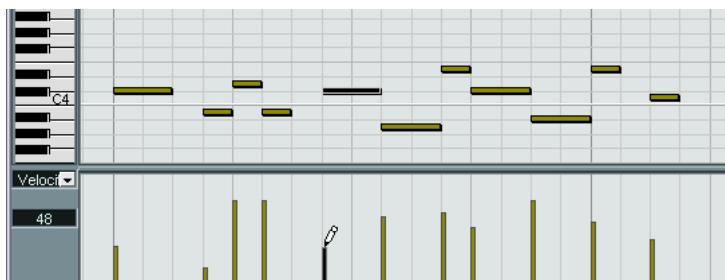



Velocity values are edited with the Pencil tool. The different Pencil tool modes offer the following possibilities:

- In Draw mode, you can use the Pencil tool to change the velocity of a single note: click on its velocity bar and drag the bar up or down. While you drag, the current velocity value is shown in the display to the left.
- You can use Draw mode or Paint mode to change the velocity values of several notes by painting a “freehand curve”.


When editing velocity, these two modes have the same functionality.

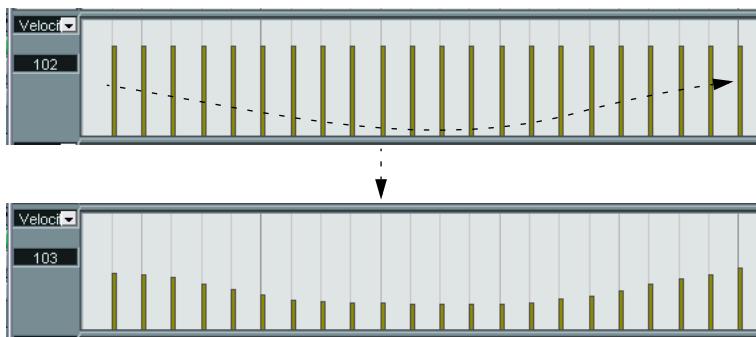

- Use Line mode for creating linear velocity ramps.
Click where you want the ramp to start and drag the cursor to where you want the ramp to end. When you release the mouse button, the velocity values are aligned with the line between the two points.

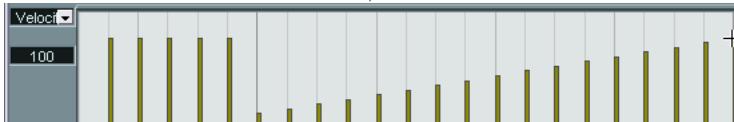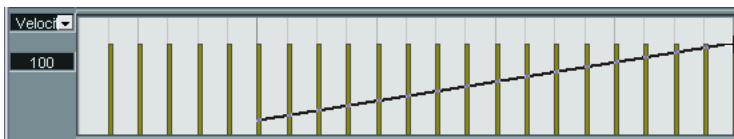

- Parabola mode works in the same way, but aligns the velocity values with a Parabola curve instead.
Use this for smooth, "natural" velocity fades, etc.

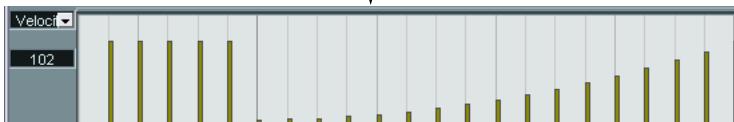

- The remaining three modes align the velocity values with continuous curve shapes (see below).

Note:

- If there is more than one note on the same position (e.g. a chord), their velocity bars will overlap in the controller lane.
If none of the notes are selected, all notes at the same position will be set to the same velocity value when you draw. To edit the velocity of only one of the notes at the same position, first select the note in the note display. Now, editing will only affect the velocity of the selected note.

You can also adjust the velocity of a single note by selecting it and changing its velocity value on the info line.

Adding and editing events in the controller display

When any option other than “Velocity” is selected for viewing in a controller lane, you can create new events or edit the values of existing events using the Pencil tool in its various modes:


- Clicking with the Pencil tool in Draw mode or Paint mode creates a new event.
- To modify the value of an event (without creating a new one), press [Alt]/[Option] and use the Pencil tool.

Note that you can click and drag to change or add multiple events, draw controller curves, etc. You can press or release [Alt]/[Option] while drawing, switching dynamically between “edit mode” and “create mode”.

If you want to enter or adjust a single event, click once with the Pencil tool:



If you want to “paint a curve”, drag the Pencil tool (with the mouse button pressed):

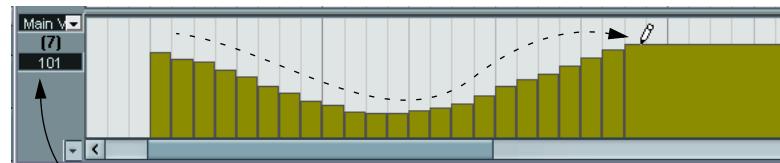

When you move the pointer in the controller lane, the corresponding value is displayed in this field.



- In Draw and Paint mode, the quantize value determines the “density” of created controller curves (if Snap is activated).

For very smooth curves, you should use a small quantize value or turn off Snap. However, please note that this creates a very large number of MIDI events, which can cause MIDI playback to “stutter” in some situations. A medium-low density is often sufficient.



- Clicking and dragging with the Pencil tool in Line mode shows a line in the controller lane, and creates events with values aligned with this line. This is the best way to draw linear controller ramps. If you press [Alt]/[Option], no new events are created – use this mode for modifying existing controller curves.



Converting a controller curve to a ramp using the Line tool:

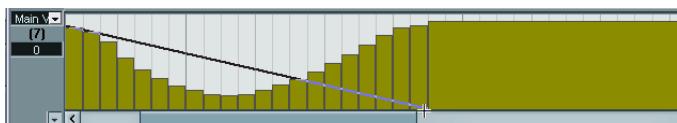


- The Parabola mode works in the same way, but aligns the values with a parabola curve instead, giving more “natural” curves and fades. Note that the result depends on from which direction you draw the parabola:



- In Parabola mode you can use modifier keys to determine the shape of the parabola curve. If you press [Ctrl]/[Command] the parabola curve will be reversed, if you press [[Alt]/[Option]+[Ctrl]/[Command] while snap is activated you can change the position of the whole curve (in both cases the snap value for the positioning will be a quarter of the quantize value). If you press [Shift], the exponent will be increased or decreased.

- In Line and Parabola modes, the length quantize value determines the “density” of created controller curves (if Snap is activated).
For very smooth curves, you should use a small length quantize value or turn off Snap. To avoid over-dense controller curves (which may cause MIDI playback to “stutter”), use a medium-low density.
- The Sine, Triangle and Square modes create events with values aligned to continuous curves.
In these modes, the quantize value determines the period of the curve (the length of one curve “cycle”) and the length quantize value determines the density of the events (the lower the length quantize note value, the smoother the curve).
- In Sine, Triangle and Square mode you can also use modifier keys to determine the shape of the curve.
If you press [Ctrl]/[Command] you can change the phase of the beginning of the curve, if you press [Alt]+[Ctrl] (Win)/[Option]+ [Command] (Mac) while snap is activated you can change the position of the whole curve (in both cases the snap value for the positioning will be a quarter of the quantize value).

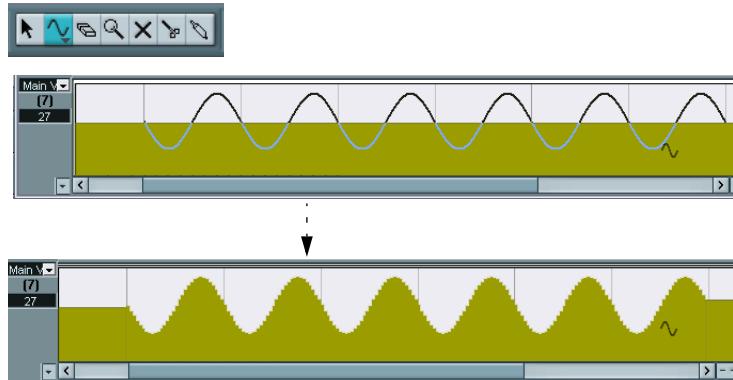

- You can also set the curve period freely by holding down [Shift] when you insert events in Sine, Triangle or Square mode.
Activate Snap, [Shift]-click and drag to set the length of one period. The period length will be a multiple of the quantize value.
- In Triangle and Square mode you can press [Shift]+[Ctrl]/[Command] to change the maximum position of the triangle curve (to create sawtooth curves) or the pulse of the square curve. As in other modes, you can press [Alt]/[Option] if you want to change the existing events rather than creating new ones. Again, the snap value for the positioning will be a quarter of the quantize value.

Moving and copying events

You can move or duplicate events in a controller lane, much like you can with notes:

1. Use the Arrow tool to select the events you want to cut or copy.
To select more than one event, [Shift]-click or drag a selection rectangle, according to the standard selection procedures.
 2. Click and drag the events to move them.
If Snap is activated, this determines to which positions you can move the events (see [page 547](#)).
- If you hold down [Alt]/[Option] and drag, the events will be copied rather than moved.
-
- If there already is an event of the same type at the exact same position, this will be replaced by the moved event.**
-
- Remember that a non-note event doesn't have a length – it's “valid” until the next event (see [page 497](#)).**

Using cut, copy and paste

You can use the standard Cut, Copy and Paste options on the Edit menu to move or copy events in the controller display:

1. Select the events you want to cut or copy.
2. Select Cut or Copy from the Edit menu.
3. If you want to paste the events into another MIDI part, open that part in another Key Editor window.
4. Position the project cursor where you want to paste the events.
5. Select Paste from the Edit menu.

The events on the clipboard are added, starting at the project cursor position, maintaining their relative positions. If a pasted event ends up at the same position as an existing event of the same type, the old event is replaced.

Deleting events in the controller display


You delete events by clicking with the Eraser tool or by selecting them and pressing [Backspace]. Please note:

- Deleting a controller event makes the last event before this valid up until the next event. It does not “zero” any controller changes. See [page 497](#).
- You can delete notes by deleting their velocity bars in the controller display.

Please be aware that if there is more than one note on the same position, there may still only be one velocity bar visible – make sure you delete only the desired notes!

Adding and editing Poly Pressure events

Poly Pressure events are special, in that they “belong to” a specific note number (key). That is, each Poly Pressure event has two editable values: the note number and the amount of pressure. Therefore, when Poly Pressure is selected on the event type pop-up menu, there are two value fields to the left of the controller display, one for the note number and one for the amount:

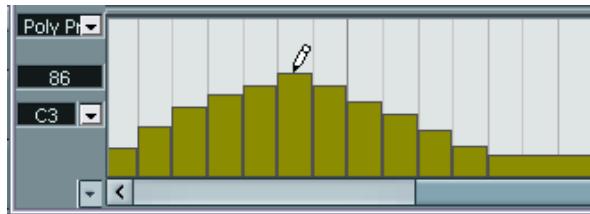


To add a new Poly Pressure event, proceed as follows:

1. Select Poly Pressure on the event type pop-up menu.
2. Set the note number by clicking on the keyboard display.
Note that this only works for the topmost lane. If you have selected "Poly Pressure" for several controller lanes, you have to type in the desired note number directly in the lower value field to the left of each lane. The selected note number is displayed in the lower value field to the left of the controller display.
3. Use the Pencil tool to add a new event, just as when adding regular controller events.

To view and edit existing Poly Pressure events, proceed as follows:

1. Select Poly Pressure on the event type pop-up menu.
2. Click on the arrow button next to the note number field to the left of the controller lane.
A pop-up menu appears, listing all note numbers for which there already are Poly Pressure events.
3. Select a note number from the pop-up menu.
The Poly Pressure events for the selected note number are shown in the controller lane.
4. Use the Pencil tool to edit the events as usual.
Press [Alt]/[Option] to edit existing events without adding any new ones.
- Poly Pressure events can also be added and edited in the List Editor.

The Drum Editor – Overview

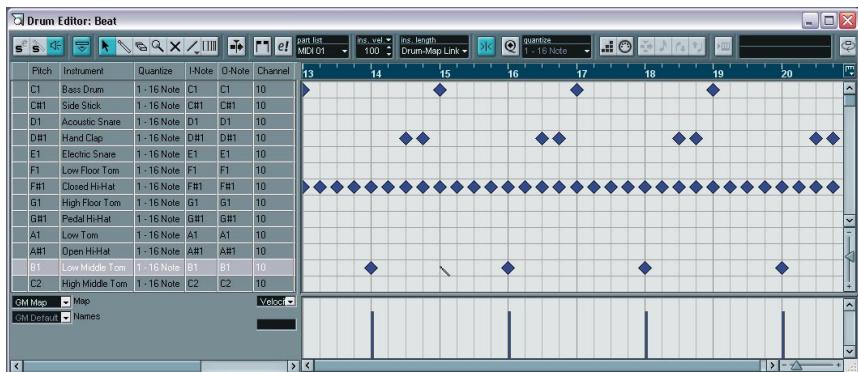

The toolbar and info line

These are much the same as the toolbar and info line in the Key Editor, with the following differences:

- The Drum Editor has no Pencil tool – instead there is a Drumstick tool (for inputting and removing notes) and a Paint tool with various line and curve modes (for painting several notes in one go or editing controller events).
- There are no Scissors and Glue Tube tools in the Drum Editor.
- As in the Key Editor, the mouse pointer display in the toolbar shows the pitch and position of the pointer, but the pitch is shown as a drum sound name rather than a note number.
- The Use Global Quantize button allows you to select which value should be used when Snap is on – the global quantize value on the toolbar or the individual quantize values for the drum sounds.
- Instead of a Length Quantize pop-up, there is an Insert Length pop-up menu. It is used in much the same way, as described on the following pages.

The drum sound list

Pitch	Instrument	Quantize	I-Note	O-Note	Channel	Output	M
C1	Bass Drum	1 - 16 Note	C1	C1	10	Delta 101	
C#1	Side Stick	1 - 16 Note	C#1	C#1	10	Delta 101	
D1	Acoustic Snare	1 - 16 Note	D1	D1	10	Delta 101	
D#1	Hand Clap	1 - 16 Note	D#1	D#1	10	Delta 101	
E1	Electric Snare	1 - 16 Note	E1	E1	10	Delta 101	
F1	Low Floor Tom	1 - 16 Note	F1	F1	10	Delta 101	
F#1	Closed Hi-Hat	1 - 16 Note	F#1	F#1	10	Delta 101	
G1	High Floor Tom	1 - 16 Note	G1	G1	10	Delta 101	
G#1	Pedal Hi-Hat	1 - 16 Note	G#1	G#1	10	Delta 101	
A1	Low Tom	1 - 16 Note	A1	A1	10	Delta 101	
A#1	Open Hi-Hat	1 - 16 Note	A#1	A#1	10	Delta 101	
B1	Low Middle Tom	1 - 16 Note	B1	B1	10	Delta 101	
C2	High Middle Tom	1 - 16 Note	C2	C2	10	Delta 101	

The purpose of the Drum Editor is to edit MIDI tracks where each note (pitch) plays a separate sound, as is typically the case with a MIDI drum kit. The drum sound list to the left lists all drum sounds by name (according to the selected drum map or name list – see below), and lets you adjust and manipulate the drum sound setup in various ways.

Note:

- The number of columns in the list depends on whether there's a drum map selected for the track or not.
See [page 529](#).
- You can reorder the columns by dragging the column headings, and resize the columns by dragging the dividers between the column headings.

The note display



The Drum Editor's note display displays notes as diamond symbols. The vertical position of the notes corresponds to the drum sound list to the left, while the horizontal position corresponds to the note's position in time, just as in the Key Editor. Note however, that the diamond symbols don't indicate the length of the notes. This makes sense, since drum sounds most often are "one-shot" samples that play to their end regardless of the note lengths.

Drum map and name pop-up menus



Below the drum sound list you will find two pop-up menus, used for selecting a drum map for the edited track or (if no drum map is selected) a list of drum sound names. For an explanation of drum maps, see [page 529](#).

Controller display

The controller display in the Drum Editor is exactly the same as in the Key Editor. You can add or remove controller lanes from the Quick menu, and create and edit events as described on [page 512](#).

Drum Editor operations

The basic handling (zooming, playback, auditioning, etc.) is the same as in the Key Editor (see [page 498](#)). The following sections describe the procedures and features that are specific to the Drum Editor.

Creating and editing notes

The standard way of entering notes in the Drum Editor is to click with the Drumstick tool.



When you move the pointer in the note display, its bar position and drum sound is indicated in the toolbar, making it easy to find the right sound and position.

The position of the created note depends on the following factors:

- If Snap is deactivated on the toolbar, the note will appear exactly where you clicked.
In this mode, notes can be positioned freely.
- If Snap is activated and Use Global Quantize is deactivated on the toolbar, the note will snap to positions according to the quantize value set for the sound in the drum sound list.
You can set up different quantize values for different drum sounds. You may for example want hi-hat notes snap to sixteenth notes, but snare and bass drum snap to eighth notes.
- If both Snap and Use Global Quantize are activated, the note will snap to positions according to the Quantize setting on the toolbar (next to the Use Global Quantize button).

The length of the inserted note is determined by the Insert Length setting on the toolbar. However, if this is set to "Drum-Map Link", the note will get the length of the quantize value for the drum sound.

The notes will get the insert velocity value set on the toolbar.

- You can quickly audition the drum sounds by clicking in the leftmost column in the drum sound list.
This plays the corresponding note.
- Clicking with the Drumstick tool on an existing note will remove it.
This makes drum pattern editing very quick and intuitive.

Selecting notes

Selecting notes is done by any of the following methods:

- Use the Arrow tool.
The standard selection techniques apply.
- Use the Select submenu on the Quick menu (see [page 502](#)).
- Use the left and right arrow keys on the computer keyboard to step from one note to the next or previous note.
If you press [Shift] and use the arrow keys, the current selection will be kept, allowing you to select several notes.
- You can also press [Shift] and double click on a note to select all the following notes for the same drum sound.
- If the option “Auto Select Events under Cursor” is activated in the Preferences dialog (Editing page), all notes currently “touched” by the project cursor are automatically selected.

Moving, duplicating or repeating notes

To move or copy notes in the editor (to other positions or other drum sounds), you use the same methods as in the Key Editor: click and drag, use the arrow keys or Edit menu functions, etc. – see [page 504](#). There is one thing to note:

When you are moving or copying several selected notes by dragging them and Snap is activated but Use Global Quantize turned off, the notes will snap to positions according to the quantize values for the drum sounds. If the moved/copied notes have different quantize values, the largest value will determine snapping. For example, if you are moving two notes, with the quantize values 1/16 and 1/4 respectively, the notes will snap to quarter notes (1/4).

- You can also adjust the position of notes by quantizing (see [page 469](#)). Again, which quantize value is used depends on whether Global Quantize is used.

Muting notes and drum sounds

You can mute individual notes by clicking or enclosing them with the Mute tool or by using the Mute function on the Edit menu (see [page 507](#)).

Furthermore, if a drum map is selected (see [page 534](#)), the drum sound list will have a Mute column. Click in the Mute column for a drum sound to mute that sound. Finally, clicking the Drum Solo button will mute all drum sounds other than the selected one.

Pitch	Instrument	M	Quantize	I-Note	O-Note
C1	Bass Drum		1 - 16 Note	C1	C1
C#1	Side Stick		1 - 16 Note	C#1	C#1
D1	Acoustic Snare	●	1 - 16 Note	D1	D1
D#1	Hand Clap	●	1 - 16 Note	D#1	D#1
E1	Electric Snare		1 - 16 Note	E1	E1
F1	Low Floor Tom		1 - 16 Note	F1	F1
F#1	Closed Hi-Hat	●	1 - 16 Note	F#1	F#1
G1	High Floor Tom		1 - 16 Note	G1	G1
G#1	Pedal Hi-Hat		1 - 16 Note	G#1	G#1

Muted drum sounds

-
- Please note that the mute state for drum sounds is part of the drum map, so any other tracks using the same map will also be affected.
-

Deleting notes

To delete notes, click on them with the Drumstick tool or Eraser tool or select them and press [Backspace].

Other editing methods

As in the Key Editor, you can edit notes on the info line or via MIDI, and enter notes using step input. Please refer to [page 508](#).

Working with drum maps

Background

As discussed earlier, a drum kit in a MIDI instrument is most often a set of different drum sounds with each sound placed on a separate key (i.e. the different sounds are assigned to different MIDI note numbers). One key plays a bass drum sound, another a snare and so on.

Unfortunately, different MIDI instruments often use different key assignments. This can be troublesome if you have made a drum pattern using one MIDI device, and then want to try it on another. When you switch device, it is very likely that your snare drum becomes a ride cymbal, or your hi-hat becomes a tom, etc. – just because the drum sounds are distributed differently in the two instruments.

To solve this problem, and simplify several aspects of MIDI drum kits (like using drum sounds from different instruments in the same “drum kit”), Nuendo features so-called drum maps. A drum map is basically a list of drum sounds, with a number of settings for each sound. When you play back a MIDI track for which you have selected a drum map, the MIDI notes are “filtered” through the drum map before being sent to the MIDI instrument. Among other things, the map determines which MIDI note number is sent out for each drum sound, and so which sound is played in the receiving MIDI device.

A solution to the problem above would therefore be to make up drum maps for all your instruments. When you want to try your drum pattern on another instrument, you simply switch to the corresponding drum map and your snare drum sound will remain a snare drum sound.

Drum map settings

A drum map consists of settings for 128 drum sounds (one for each MIDI note number). To get an overview of these settings, open the Drum Editor and use the Map pop-up menu below the drum sound list to select the “GM Map” drum map.



This drum map is set up according to the General MIDI standard. For information on how to load, create and select other drum maps, see [page 534](#).

Now, take a look at the drum sound list (you may have to drag the divider between the list and the note display to the right to see all columns). The columns show the settings of the drum map for each sound.

Pitch	Instrument	M	Quantize	I-Note	O-Note	Channel	Output	2	3
C1	Bass Drum		1 - 16 Note	C1	C1	10	Delta 1010 MIDI		
C#1	Side Stick		1 - 16 Note	C#1	C#1	10	Delta 1010 MIDI		
D1	Acoustic Snare		1 - 16 Note	D1	D1	10	Delta 1010 MIDI		
D#1	Hand Clap		1 - 16 Note	D#1	D#1	10	Delta 1010 MIDI		
E1	Electric Snare		1 - 16 Note	E1	E1	10	Delta 1010 MIDI		
F1	Low Floor Tom		1 - 16 Note	F1	F1	10	Delta 1010 MIDI		
F#1	Closed Hi-Hat		1 - 16 Note	F#1	F#1	10	Delta 1010 MIDI		
G1	High Floor Tom		1 - 16 Note	G1	G1	10	Delta 1010 MIDI		
G#1	Pedal Hi-Hat		1 - 16 Note	G#1	G#1	10	Delta 1010 MIDI		
A1	Low Tom		1 - 16 Note	A1	A1	10	Delta 1010 MIDI		
A#1	Open Hi-Hat		1 - 16 Note	A#1	A#1	10	Delta 1010 MIDI		

Here's a brief description (details follow below):

Column	Description
Pitch	The actual note number of the drum sound. This is what links notes on a MIDI track to drum sounds. For example, with the above drum map, all MIDI notes with the pitch C1 would be mapped to the Bass Drum sound. More on this below.
Instrument	The name of the drum sound.
Quantize	This value is used when entering and editing notes as described on page 526 and page 527 .
Mute	Allows you to mute a drum sound, excluding it from playback. See page 528 .
I-note	This is the "input note" for the drum sound. When this MIDI note is sent into Nuendo, (i.e. played by you), the note will be mapped to the corresponding drum sound (and automatically transposed according to the Pitch setting for the sound). See below.
O-note	This is the "output note", i.e. the MIDI note number that is sent out every time the drum sound is played back. See below.
Channel	The drum sound will be played back on this MIDI channel.
Output	The drum sound will be played back on this MIDI output. If you set this to "Default", the MIDI output selected for the track will be used.

- All settings in a drum map (except the Pitch setting) can be changed directly in the drum sound list, or in the Drum Map Setup dialog (see [page 535](#)).

Note that the changes you make will affect all tracks that use the drum map.

About Pitch, I-note and O-note

This can be a somewhat confusing area, but once you've grasped how it all works it's not very complicated. Going through the following "theory" will help you make the most out of the drum map concept – especially if you want to create your own drum maps.

As we said earlier, a drum map is a kind of "filter", transforming notes according to the settings in the map. It does this transformation twice; once when it receives an incoming note (i.e. when you play a note on your MIDI controller) and once when a note is sent from the program to the MIDI sound device.

In the following example, we have modified the drum map, so that the Bass Drum sound has different Pitch, I-note and O-note values.

	Pitch	Instrument	M	Quantize	I-Note	O-Note	Channel
	C1	Bass Drum		1 - 16 Note	A1	B0	10
	C#1	Side Stick		1 - 16 Note	C#1	C#1	10
	D1	Acoustic Snare		1 - 16 Note	D1	D1	10
	D#1	Hand Clap		1 - 16 Note	D#1	D#1	10

I-notes

Let's look at what happens on input: When you play a note on your MIDI instrument, the program will look for this note number among the I-notes in the drum map. In our case, if you play the note A1, the program will find that this is the I-note of the Bass Drum sound.

This is where the first transformation happens: the note will get a new note number according to the Pitch setting for the drum sound. In our case, the note will be transformed to a C1 note, because that is the pitch of the Bass Drum sound. If you record the note, it will be recorded as a C1 note.

O-notes

The next step is the output. This is what happens when you play back the recorded note, or when the note you play is sent back out to a MIDI instrument in real time (MIDI Thru):

The program checks the drum map and finds the drum sound with the pitch of the note. In our case, this is a C1 note and the drum sound is the Bass Drum. Before the note is sent to the MIDI output, the second transformation takes place: the note number is changed to that of the O-note for the sound. In our example, the note sent to the MIDI instrument will be a B0 note.

Usage

So, what's the point of all this? Again, the purposes are different for I-notes and O-notes:

- **Changing the I-note settings allows you to choose which keys will play which drum sounds, when playing or recording from a MIDI instrument.**
For example, you may want to place some drum sounds near each other on the keyboard so that they can be easily played together, move sounds so that the most important sounds can be played from a short keyboard, play a sound from a black key instead of a white, and so on.
If you never play your drum parts from a MIDI controller (but draw them in the editor) you don't need to care about the I-note setting.
- **The O-note settings let you set things up so that the “Bass Drum” sound really plays a bass drum.**
If you're using a MIDI instrument in which the bass drum sound is on the C2 key, you set the O-note for the Bass Drum sound to C2. When you switch to another instrument (in which the bass drum is on C1) you want the Bass Drum O-note set to C1. Once you have set up drum maps for all your MIDI instruments, you don't have to care about this anymore – you just select another drum map when you want to use another MIDI instrument for drum sounds.

The channel and output settings

You can set separate MIDI channels and/or MIDI outputs for each sound in a drum map. The following rules apply:

- When a drum map is selected for a track, the MIDI channel settings in the drum map override the MIDI channel setting for the track.
In other words, the MIDI channel setting you make in the Track list or Inspector for the track is normally disregarded. If you want a drum sound to use the channel of the track, set it to channel "Any" in the drum map.
- If the MIDI output is set to "default" for a sound in a drum map, the sound will use the MIDI output selected for the track.
Selecting any other option allows you to direct the sound to a specific MIDI output.

By making specific MIDI channel and output settings for all sounds in a drum map, you can direct your drum tracks directly to another MIDI instrument simply by selecting another drum map – you don't need to make any channel or output changes for the actual track.

- To select the same MIDI channel for all sounds in a drum map, click the Channel column, press [Ctrl]/[Command] and select the desired channel.
All drum sounds will be set to this MIDI channel. The same procedure can be used for selecting the same MIDI output for all sounds as well.

It can also be useful to select different channels and/or outputs for different sounds. This allows you to construct drum kits with sounds from several different MIDI devices, etc.

Managing drum maps

Selecting a drum map for a track

To select a drum map for a MIDI track, use the Map pop-up menu in the Inspector or in the Drum Editor:



Selecting “No Drum Map” turns off the drum map functionality in the Drum Editor. Even if you don’t use a drum map, you can still separate sounds by name using a name list (see [page 537](#)).

- Initially, the Map pop-up menu will only contain one map: “GM Map”. However, you will find a number of drum maps included on the program CD – how to load these is described below.

The Drum Map Setup dialog

To set up and manage your drum maps, select Drum Map Setup from the Map pop-up menus or the MIDI menu. This opens the following dialog:



This is where you load, create, modify and save drum maps. The list to the left shows the currently loaded drum maps; selecting a drum map in the list displays its sounds and settings to the right.

- The settings for the drum sounds are exactly the same as in the Drum Editor (see [page 530](#)).

As in the Drum Editor, you can click the leftmost column to audition a drum sound. Note: if you audition a sound in the Drummap Setup dialog, and the sound is set to MIDI output “Default”, the output selected on the Default pop-up menu in the lower left corner will be used. When auditioning a Default output sound in the Drum Editor, the MIDI output selected for the track will be used, as described on [page 534](#).

Below the drum sound list you will find a number of buttons, with the following functionality:

Button	Description
New Map	Click this to add a new drum map to the project. The drum sounds will be named “Sound 1, Sound 2” and so on, and have all parameters set to default values. The map will be named “Empty Map”, but you can rename it by clicking and typing in the list.
New Copy	Adds a copy of the currently selected drum map. This is probably the quickest way to create a new drum map: select the map that is similar to what you want, create a copy, change the desired drum sound settings and rename the map in the list.
Remove	Removes the selected drum map from the project.
Load	Opens a file dialog, allowing you to load drum maps from disk. On the Nuendo CD you will find a number of drum maps for different MIDI instruments – use this function to load the desired maps into your project.
Save	Opens a file dialog for saving the drum map selected in the list. If you have created or modified a drum map, you should use this function to save it as a file on disk – this allows you to load it into other projects. Drum map files have the extension “.drm”.
Assign	Click this button to assign the selected drum map to the current MIDI track (only available if a MIDI track was selected when you opened the Drum Map Setup dialog). This is the same as selecting the drum map from the Map pop-up menu.
OK	Closes the dialog.

- **Drum maps are saved with the project files. If you have created or modified a drum map, you should use the Save function to store it as a separate file, available for loading into other projects.**

If you always want to have the same drum map(s) included in your projects, you may want to load these into the default project – see [page 680](#).

O-Note Conversion

This function on the MIDI menu goes through the selected MIDI part(s) and sets the actual pitch of each note according to its O-note setting. This is useful if you want to convert the track to a “regular” MIDI track (with no drum map) and still have the notes play back the correct drum sound. A typical application is if you want to export your MIDI recording as a standard MIDI file (see [page 689](#)) – by first performing an O-Note Conversion you make sure that your drum tracks play back as they should when they are exported.

Using drum name lists


Even if no drum map is selected for the edited MIDI track, you can still use the Drum Editor if needed. As previously mentioned, the drum sound list will then only have four columns: Audition, Pitch, Instrument (drum sound names) and Quantize. There will be no I-note and O-note functionality.

In this mode, the names shown in the Instrument column depend on the selection on the Names pop-up menu, just below the Map pop-up in the Drum Editor.



The options on this pop-up menu are the currently loaded drum maps plus a “GM Default” item which is always available. This means you can use the drum sound names in any loaded drum map without using I-notes and O-notes, should you so like.

The List Editor – Overview

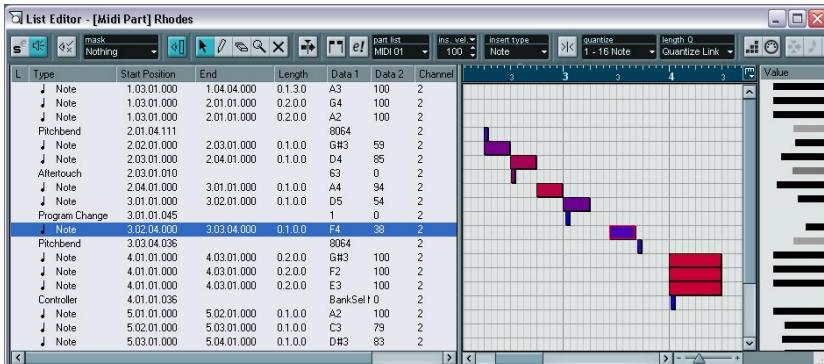

The toolbar

The toolbar contains several items that are the same as in the Key Editor (edit solo, snap, quantize settings, etc.). These are described earlier in this chapter. The following toolbar items are unique to the List Editor:

- The Insert pop-up menu is used when creating new events. This is where you determine what type of event to add (see [page 540](#)).
- The Mask pop-up menu and Filter view (Show Filter View button) allow you to hide events from view, based on their type and other properties. See [page 543](#).
- The Value View button can be used for hiding and showing the Value display (see below).

The List Editor has no info line (numerical editing is available in the list instead).

The list

This lists all events in the currently selected MIDI part, in the order (from top to bottom) they are played back. You can edit the event properties by using regular value editing, as described on [page 541](#).

The event display

This shows the events graphically. The vertical position of an event in the display corresponds to its entry in the list (i.e. to the playback order), while the horizontal position corresponds to its actual position in the project. This is where you add new parts or events, drag to move them, etc.

The value display

This display shows the “value” of each event, allowing for easy viewing and graphical editing. Typically, the value shown is the “Data 2” or “Value 2” property (amounts for MIDI controller events, velocity for notes, etc.). You can show or hide this display by clicking the “Show List Value View” button on the toolbar.

List Editor operations

Customizing the view

You can click and drag the divider between the list and the event display to make one area wider and the other narrower. Furthermore, the list can be customized in the following ways:

- You can change the order of the columns by dragging the column headings.
- You can resize columns by dragging the dividers between the column headings.

Setting the display format

Just like in the Project window, you set the display format (bars+beats, seconds, etc.) by right-clicking (Win) or [Ctrl]-clicking (Mac) in the ruler and selecting an option from the pop-up menu. This setting affects both the ruler and all start, end and length values shown in the list.


Zooming

You can change the horizontal magnification in the event display by using the zoom slider below the display or the Magnification Glass tool.

Adding events

To add a new event to the edited part, proceed as follows:

1. Use the Insert pop-up menu on the toolbar to select the event type.

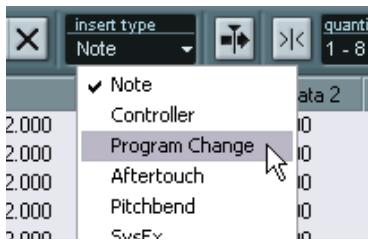

2. Select the Pencil tool and click in the event display, at the desired position (relative to the ruler).

If you are creating note events, you can click and drag to set the length of the note.

The new event appears in the list and in the display. Its properties will be set to default values, but can easily be adjusted in the list.

Editing in the list

The list allows you to perform detailed numerical editing of the events' properties. The columns have the following functionality:

Column	Description
Type	The event type. This cannot be changed.
Start	The start position of the event, shown in the format selected for the ruler. Changing this is the same as moving the event. Note that moving the event past any other event in the list will re-sort the list (the list always shows the events in the order they are played back).
End	This is only used for note events, allowing you to view and edit the end position of a note (thereby resizing it).
Length	This is only used for note events. It shows the length of the note – changing this resizes the note and automatically changes the End value as well.
Data 1	This is the “data 1” or “value 1” property of the event. The content of this depends on the event type – for notes, this is the pitch, for example. Where applicable, the values are shown in the most relevant form. For instance, the Data 1 value for notes is shown as a note number in the format selected in the Preferences dialog (Event Display–MIDI page). See also the table on page 546 .
Data 2	This is the “data 2” or “value 2” property of the event. The content of this depends on the event type – for notes, this is the velocity value, for example. See the table on page 546 .
Channel	The MIDI channel of the event. Note that this setting is normally overridden by the channel setting for the track. To make a MIDI event play back on “its own” channel, set its track to channel “Any” in the Project window.
Comment	This column is used for some event types only, providing an additional comment about the event.

- **For SysEx (system exclusive) events, you can only edit the position (Start) in the list.**

However, clicking the Comment column opens the MIDI SysEx Editor, in which you can perform detailed editing of system exclusive events. This and other aspects of working with system exclusive messages is described in the separate document “MIDI devices and features”.

Editing in the event display

The event display allows you to edit the events graphically using the tools on the toolbar.

- To move an event, click and drag it to a new position.
Note that moving the event past any other event in the display will re-sort the list (the list always shows the events in the order they are played back). As a result, the vertical position of the event in the display will change as well.
- To make a copy of an event, press [Alt]/[Option] and drag it to a new position.
- To resize a note, select it and drag its end point with the Arrow tool as in the Project window.
This only works with notes.
- To mute or unmute an event, click on it with the Mute tool.
You can mute or unmute several events in one go by enclosing them in a selection rectangle with the Mute tool.
- You can select a color scheme for the events with the Colors pop-up menu on the toolbar.
This affects how all MIDI events are shown in the List, Key and Drum editors – see [page 547](#).
- To delete an event, select it and press [Backspace] or [Delete], or click on it with the Eraser tool in the event display.

Filtering



Clicking the “Show Filter View” button on the toolbar opens an additional filter bar that allows you to hide specific event types from view. For example, it may be hard to find note events if the part contains a lot of controllers. By hiding these the list becomes more manageable.


To hide an event type, tick its checkbox on the filter view. To see one event type only (hide all other event types), press [Ctrl]/[Command] and click its checkbox. If you [Ctrl]/[Command]-click again, all checkboxes are cleared (all events will be visible).

- **The event types remain hidden even if you close the filter view.**

To make sure you see all events, open the filter view and check that all checkboxes are deactivated.

- **The filter view does not remove, mute or in any other way change the events.**

Masking

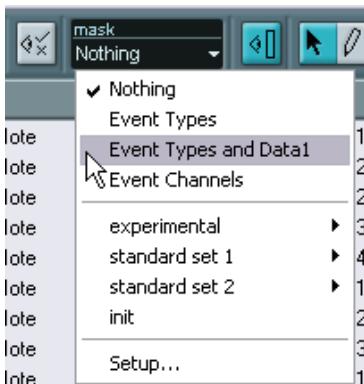

The Mask function is similar to the filter view but allows you to hide events based on some other criteria as well. Proceed as follows:

1. Select an event (or several events) of the type you want to view.
2. Pull down the Mask pop-up menu on the toolbar and select one of the options.

The results are as follows:

Option	Description
Event Types	Only events with the type of the selected event will be shown. This does the same as the filter view but is quicker if you only want to view a single event type.
Event Types and Data 1	Only events of the same type and with the same "Data 1" value will be shown. For example, if a note event is selected, only notes with the same pitch will be shown. If a controller event is selected, only controllers of the same type will be shown.
Event Channels	Only events with the same channel as the selected event will be shown.

In addition to the above options, the menu also gives you access to the same presets available in the Logical Editor (see the separate "MIDI devices and features" pdf document). Furthermore, the "Setup..." item on the Mask pop-up menu gives you direct access to the Logical Editor, with the aid of which you can create very complex masking settings.


When you apply any of the presets from the Logical Editor or use the Logical Editor to create masking settings yourself, only the events that meet the criteria specified will be visible.

- To deactivate the Mask function, select “Nothing” from the Mask pop-up menu.

The most typical usage of the Mask function is to view a certain type of controller only (e.g. Modulation, Breath Control, etc.). Since these are all the same event types (controller), this would not be possible using the filter view. With the “Controllers and Event Types” option on the Mask pop-up menu, it is!

Editing in the value display

The value display to the right of the event display is a tool for quick viewing and editing of multiple values, e.g. velocities or controller amounts. The values are shown as horizontal bars, with the bar length corresponding to the value.

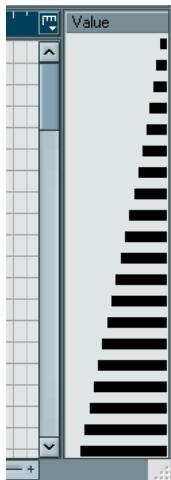


A velocity ramp in the value display.

You edit the values by clicking and dragging. Note that the pointer automatically takes on the shape of the Pencil tool when you move it into the value display – you don't have to select the Pencil tool for this.

Exactly which value is shown for an event depends on the event type. The following table shows what is displayed and edited in the Data columns and the value display:

Event type	Data 1	Data 2	Value display
Note	Pitch (note number)	Velocity	Velocity
Controller	Controller type	Controller amount	Controller amount
Program Change	Program number	Not used	Program number
Aftertouch	Aftertouch amount	Not used	Aftertouch amount
Pitch Bend	Bend amount	Not used	Bend amount
SysEx	Not used	Not used	Not used

- The value display can be hidden from view by clicking the “Show List Value View” button on the toolbar, so that it is not lit.



Common MIDI editor options and settings

Snap



Snap activated on the toolbar.

The Snap function helps you find exact positions when editing in a MIDI editor. It does this by restricting horizontal movement and positioning to certain positions. Operations affected by snap include moving, duplicating, drawing, sizing, etc.

- When the “Bars+Beats” display format is selected in the ruler, the quantize value on the toolbar determines the snap value. This makes it possible to snap not only to straight note values but also to swing grids set up in the Quantize Setup dialog (see [page 469](#)).
- When any time-based display format is selected in the ruler, editing snaps to whole seconds.

Coloring notes and events

By using the Colors pop-up menu on the toolbar, you can select a color scheme for the events in the editor. The following options are available:

Option	Description
Velocity	The notes get different colors depending on their velocity values.
Pitch	The notes get different colors depending on their pitch.
Channel	The notes get different colors depending on their individual MIDI channel values.
Part	The notes get the same color as their respective part in the Project window. Use this option when you are working with two or more tracks in an editor, to see better which notes belong to which track.

When any of the first three options is selected, you can select “Setup” from the Colors pop-up menu. This opens a dialog in which you can specify which colors should be associated with which velocities, pitches or channels, respectively.

23

The Tempo Track Editor

Background

For each audio or MIDI track in Nuendo, you can specify whether it should be time based or tempo based (see [page 110](#)). For tempo based tracks, the tempo can either be fixed through the whole project (this is called “Fixed tempo mode”) or follow the Tempo track (this is called “Tempo track mode”), which may contain tempo changes.

- To switch between Fixed tempo mode and Tempo track mode, use the Tempo button on the Transport panel:



When the Tempo button is lit (and the text “Track” is shown), the tempo follows the Tempo track, when it is deactivated (and the text “Fixed” is shown), the Fixed tempo is used (see [page 558](#)). You can also switch tempo mode in the Tempo Track Editor (see below).

The Tempo track also contains time signature events. These are always active, regardless of whether Fixed tempo mode or Tempo track mode is selected.


A note about tempo based audio tracks

For tempo based tracks, the start time position of audio events depends on the current tempo setting. However, it is important to realize that the actual audio (“within” the events) will play back as recorded, regardless of any tempo changes you make. Therefore, it’s good practice to make the proper tempo and time signature settings before you start recording tempo based audio.

- To make an already recorded audio track follow the tempo changes, you can use the Hitpoints and Slicing features, as described on [page 402](#). How well this works depends on the character of the audio recordings, since the Hitpoint detection feature works best with fairly rhythmical material.


Window overview

To make changes to the actual Tempo track you need to open the Tempo Track Editor, by selecting “Tempo Track” on the Project menu.

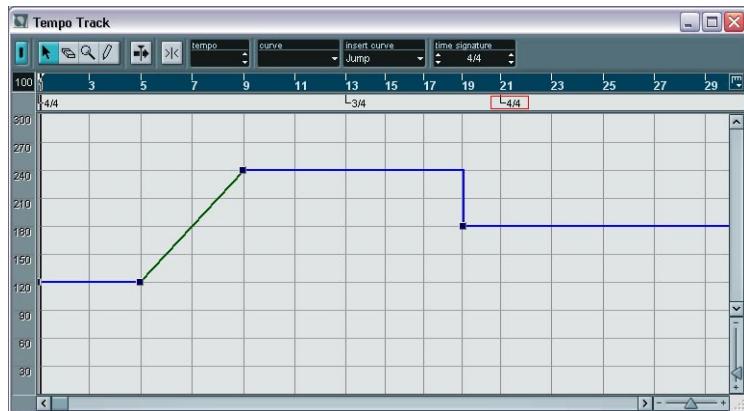


The toolbar

The toolbar contains various tools and settings. The tempo and time signature displays to the right allow you to view and edit the value of the selected tempo curve point or time signature event, much like the info line in other editors.

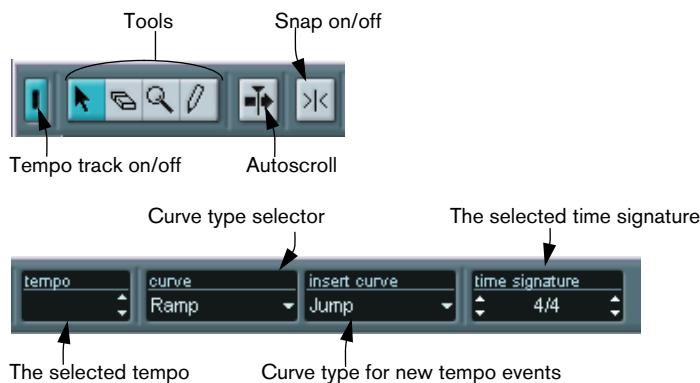

The ruler

The ruler in the Tempo Track Editor shows the timeline. As in other windows, you can select a display format by clicking on the arrow button to the right of the ruler, and selecting an option from the pop-up menu that appears.



The two additional items at the bottom of the menu have the following functionality:

- If “Time Linear” is selected, the ruler, time signature area and tempo curve display will be linear in relation to the timeline.
This means that if the ruler shows bars and beats, the distance between the bar lines will vary depending on the tempo.



- If “Bars+Beats Linear” is selected, the ruler, time signature area and tempo curve display will be linear in relation to beats.
If the ruler shows bars and beats, the distance between beats will be constant.



The time signature area

The area below the ruler contains time signature events.



The tempo curve display



The main display shows the tempo curve (or, if Fixed tempo mode is selected, the Fixed tempo – see [page 558](#)). To the left of the display is a tempo scale to help you quickly locate the desired tempo.

- Note that the vertical “grid lines” correspond to the display format selected for the ruler.

Operations

Zooming

Changing the magnification is done using any of the following methods:

- By using the zoom sliders in the lower right corner of the window.
- By using the Magnifying Glass tool.
This works according to the standard procedures.
- By using the Zoom submenu on the Edit menu.
The options on the menu work as in other windows.

Editing the tempo curve

-
- This section assumes that you are working in Tempo track mode, i.e. the Tempo button is lit on the Transport panel.
-

Adding tempo curve points

1. Use the “insert curve” pop-up menu in the toolbar to select whether you want the tempo to change gradually from the previous curve point to the new one (“Ramp”) or change instantly to the new value (“Jump”).
2. Select the Pencil tool.
3. Click at the desired time position in the tempo curve display, and keep the mouse button pressed.

If Snap is activated on the toolbar, this determines at which time positions you can insert tempo curve points, see [page 560](#).




When you click, the tempo display in the toolbar shows the tempo value.

4. Drag the curve point to the desired tempo value (indicated in the tempo display), and release the mouse button.
 The tempo curve point is inserted. The result depends on whether you selected "Ramp" or "Jump" in step 1 above:



Insert curve set to "Ramp".

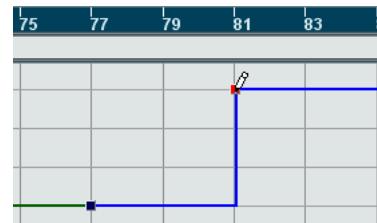

Insert curve set to "Jump".

- You can also just click and draw a tempo curve with the Pencil tool, having curve points automatically inserted as you draw.
 You would probably want to select the "Ramp" Insert Curve mode when doing this.
 - Instead of using the Pencil tool, you can press [Alt]/[Option] and use the Arrow tool.
 This will only insert a single point (i.e. you cannot draw a curve with the Arrow tool).
- You can also have tempo values automatically inserted by the Beat Calculator, see [page 561](#).**
-

Selecting tempo curve points

Selecting curve points is done using any of the following methods:

- Use the Arrow tool.
 The standard selection techniques apply.
- Use the Select submenu on the Edit menu.
 The options are:

Option	Description
All	Selects all curve points on the Tempo track.
None	Deselects all curve points.
In Loop	Selects all curve points between the left and right locator.
From Start to Cursor	Selects all points to the left of the project cursor.
From Cursor to End	Selects all points to the right of the project cursor.

- You can also use the left and right arrow keys on the computer keyboard, to go from one curve point to the next.
If you press [Shift] and use the arrow keys, the current selection will be kept, allowing you to select several points.

Editing tempo curve points

Curve points can be edited in the following ways:

- By clicking and dragging horizontally and/or vertically.
If several points are selected, all of them are moved. If Snap is activated on the toolbar, this determines to which time positions you can move curve points, see [page 560](#).
 - By adjusting the tempo value in the tempo display on the toolbar.
For this to work, a single tempo curve point must be selected.
-
- Dragging tempo curve points with a time based display format (any other format than “Bars+Beats”) may give confusing results. This is because moving a point will change the relationship between tempo and time. Specifically, let’s say you move a tempo point to the right and drop it on a certain time position. When you release the mouse button, the mapping between tempo and time will be adjusted (since you have changed the tempo curve). As a result, the moved point will appear at another position. For this reason, we recommend that you use the Bars+Beats display format when editing tempo curves.

Adjusting the curve type


You can change the curve type of a tempo curve segment at any time, using the following method:

1. Select all curve points within the segment you want to edit.



2. Pull down the Curve pop-up menu on the toolbar and select "Jump" or "Ramp".

The curve sections between the selected points are adjusted.

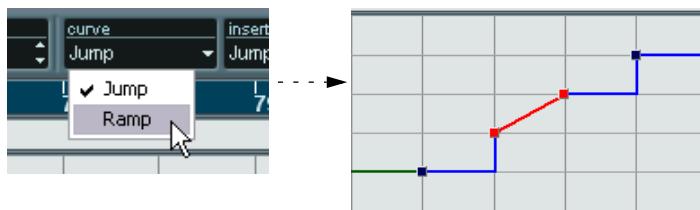

Removing tempo curve points

To remove a curve point, either click on it with the Eraser tool or select it and press [Backspace]. The first tempo curve point cannot be removed.

Recording tempo changes



The tempo record slider on the toolbar allows you to record tempo changes "on the fly": simply start playback and use the slider to raise or lower the tempo at the desired positions. Useful for creating natural sounding ritardandos, etc.

Setting the Fixed tempo

When the Tempo track button is deactivated, the Tempo track curve is greyed out (but still visible). Since the Fixed tempo is constant throughout the whole project, there are no tempo curve points. Instead, the Fixed tempo is displayed as a horizontal black line in the tempo curve display.



There are two ways to set the tempo in Fixed mode:

- Drag the tempo line up or down with the Arrow tool.
- Adjust the value numerically in the tempo display on the toolbar.

Adding and editing time signature events

- To add a time signature event, click in the time signature area with the Pencil tool.

This adds a default 4/4 time signature event at the closest bar position. You can also do this by pressing [Alt]/[Option] and clicking with the Arrow tool.

- To edit the value of a time signature event, select it and adjust the value in the signature display on the toolbar.

Note that there are two thumbwheel controls for the signature display; the left adjusts the numerator and the right adjusts the denominator.

- You can move a time signature event by clicking and dragging it with the Arrow tool.

Again, note that time signature events can only be positioned at the start of bars.

- To remove a time signature, either click on it with the Eraser tool or select it and press [Backspace].

The first time signature event cannot be removed.

Exporting and importing Tempo tracks

On many occasions it is useful to have several different projects share the same tempo track – e.g. when you are doing music for picture-work in workgroups. You can export the current tempo track for use in other projects by selecting “Tempo Track” from the “Export” submenu on the File menu. This allows you to save the tempo track information (including time signature events) as a special xml file (file extension “.smt”).

To import a saved tempo track, select “Tempo Track” from the “Import” submenu on the File menu. Note that this replaces all tempo track data in the current project (although the operation can be undone if needed).

Options and settings

Snap


You activate or deactivate Snap by clicking the Snap icon on the toolbar. The behavior of the function depends on the display format selected for the ruler:

- If “Bars+Beats” is selected, tempo curve points will snap to the start of bars.
- If any other display format is selected, tempo curve points will snap to the vertical grid lines in the tempo curve display.
The spacing of the grid lines depends on the horizontal magnification.
- Time signature events can only be positioned at the start of bars, regardless of whether Snap is activated or not.

Autoscroll

When this option is activated, the tempo curve display will scroll during playback, keeping the project cursor visible.

The Beat Calculator

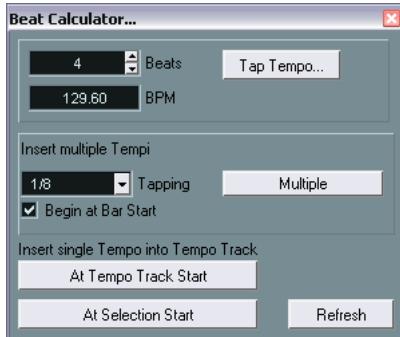

The Beat Calculator is a tool for calculating the tempo of freely recorded audio or MIDI material. It also allows you to set the tempo by tapping.

Calculating the tempo of a recording


1. In the Project window, make a selection that covers an exact number of beats of the recording.
 2. Select “Beat Calculator...” from the Project menu.
The Beat Calculator window appears.
 3. Enter the number of beats that the selection encompasses in the Beats field.
The corresponding tempo is calculated and displayed in the BPM field.
 - If you need to adjust the selection, you can just go back to the Project window, leaving the Beat Calculator open.
To re-calculate the tempo after adjusting the selection, click Refresh.
 4. If you like, you can insert the calculated tempo into the Tempo track, by clicking one of the buttons in the lower left corner of the Beat Calculator window.
Clicking “At Tempo Track Start” will adjust the first tempo curve point, while “At Selection Start” will add a new tempo curve point at the selection’s start position, using the “Jump” curve type (see [page 554](#)).
-
- If Fixed tempo mode is selected when you insert the calculated tempo, the Fixed tempo will be adjusted, regardless of which button you click.

Using Tap Tempo

The Tap Tempo function allows you to specify a tempo by tapping:

1. Open the Beat Calculator.
2. If you want to tap the tempo to some recorded material, activate playback.
3. Click the Tap Tempo button.

The Tap Tempo window appears.

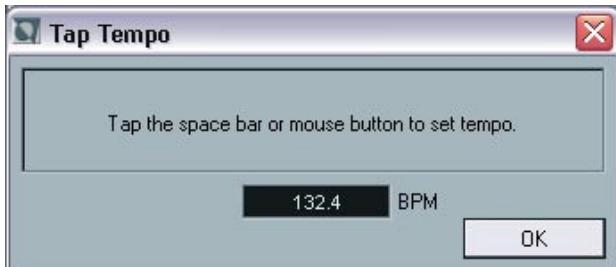

4. Tap the tempo on the computer keyboard's space bar or with the mouse button.
The tempo display will update the calculated tempo between each tap.
5. When you stop tapping, the program calculates the average timing of the taps and displays it.
6. Click OK to close the Tap Tempo window.

The tapped tempo is now shown in the Beat Calculator's BPM display. If you like, you can insert it into the Tempo track as described on the previous page.

Merge Tempo From Tapping

This function allows you to create a complete tempo track based on your tapping. Typically, you would use this if you have an audio file with no tempo mapping, and want to be able to add sequenced material afterwards, etc.

1. Create an empty time-based MIDI track and, while playing back your audio material, tap the new tempo on your MIDI keyboard and record the created notes onto the new MIDI track.
Note that you must create note events – pedal events cannot be used for this function.
 2. Play back the audio and check that the timing of the MIDI notes corresponds to that of the audio.
If necessary edit the MIDI notes in an editor.
 3. Select the part (or the individual notes, in an editor) that you want to use for the calculation.
 4. Select "Merge Tempo From Tapping" from the Functions submenu on the MIDI menu.
A dialog opens.
 5. In the dialog, specify what type of note (1/2, 1/4 etc.) you tapped during the recording.
If you activate the "Begin at Bar Start" option, the first note will automatically start at the beginning of a bar when calculating the new tempo curve.
 6. Click OK.
The project's tempo is adjusted to the tapped notes.
 7. Open the Project menu and select "Tempo Track" to check that the new tempo information is reflected in the tempo curve.
- Another way of creating a tempo map for freely recorded audio would be to use the Time Warp tool – see [page 564](#).

The Time Warp tool

The Time Warp tool lets you adjust the Tempo track so that “musical time based” material (positions related to the tempo) matches “linear time based” material (positions in time). Some typical applications:

- When you have recorded music (audio or MIDI) without tempo reference or metronome click – the Time Warp tool can be used for creating a tempo map that fits the recording (allowing you to rearrange or add sequenced material).
- When you are creating music for a movie and want to match certain positions in the video with certain positions in the music.

The Time Warp tool makes use of the fact that tracks can be based on time positions (linear time base) or positions related to tempo (musical time base) – see [page 110](#) for a description of these modes.

Basic procedure

You use the Time Warp tool to drag a musical position (a position in bars+beats format) to a certain position in time. This can be done in the Project window or in editor windows, as described below. Here is the general procedure:

1. Make sure Tempo track mode is selected.

You cannot use the Time Warp tool in Fixed tempo mode.


2. Select the Time Warp tool.



Bars+Beats format is automatically selected for the ruler in the active window and the ruler is shown in dark red.

3. Click in the window at a musical position and drag it so that it matches a position in the material you are editing – e.g. the start of an event, a certain “hit” within an audio event, a frame in a video clip, etc.

When you click with the Time Warp tool it snaps to the grid in the window.

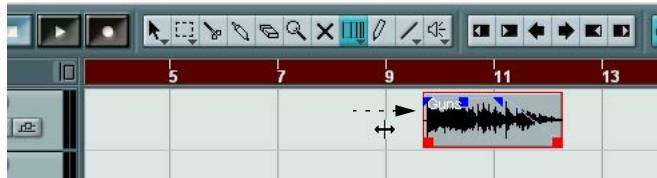

Dragging the start of bar 9 to the start of the audio event.

While you are dragging, the track(s) you are editing are temporarily switched to linear time base – this means that the contents of the tracks remain at the same time positions regardless of the tempo (there is an exception to this in the Project window – see below).

4. When you release the mouse button the musical position you clicked on matches the time position you dragged it to.

This is because the Time Warp tool changed the last tempo event on the Tempo track (and/or added new ones, depending on window and usage), thereby scaling the tempo track to fit.

Rules

- When you use the Time Warp tool, the tempo value of the last tempo event (before the click position) is adjusted.
- If later tempo events exist, a new tempo event will be created at the click position. This way, the later tempo event(s) will not be moved.
- If you press [Shift] and use the Time Warp tool, a new tempo event is created at the click position.
[Shift] is the default modifier for this – you can adjust this in the Preferences dialog (Editing-Tool Modifiers page, under the Warp Tool category).
- If you use the Time Warp tool in an editor, a tempo event will be created at the start of the edited part or event. Only the track being edited will be affected – but note that events after the edited events or parts (on the edited track) will be affected as well.
- If you have made a selection range (in the Project window, Audio Part Editor or Sample Editor) and use the Time Warp tool within that range, the tempo changes will be confined to that range.
This means tempo events will be inserted at the start and end of the selection range, if needed – useful if you need to adjust the tempo within a certain area but want all material outside that range to stay in place.
- When you click with the Time Warp tool, it snaps to the tempo grid in the window.

- When you drag the tempo grid to a new position, it can be magnetic to events in the window.
In the Project window, this requires that Snap is activated and “Events” is selected on the Snap pop-up menu – the grid will then snap to the start and end of events or parts, and to markers. In the Sample Editor, this requires that Snap to Zero Crossings is activated – the grid will then snap to hitpoints (if any). In the MIDI editors, this requires that Snap is activated – the grid will then snap to the start and end of notes.
- The function will create tempo values up to 300 bpm.

Viewing and adjusting tempo events

When you select the Time Warp tool, the ruler of the active window is shown in dark red. Existing tempo events are shown in the ruler as “flags” with the tempo values displayed.



This helps you see what's going on, but you can also use this for editing the tempo track:

- If you press the create/erase modifier key (by default [Shift]) and click on a tempo event in the ruler, it is deleted.
- You can click on a tempo event in the ruler and drag to move it. This automatically edits the tempo value in the event so that elements to the right keep their positions.
- If you press [Alt]/[Option] and move (or delete) a tempo event in the ruler, the tempo value is not adjusted – this means elements to the right will be moved.
This is the default modifier key for this – you can adjust this in the Preferences dialog (Editing-Tool Modifiers page, under the Warp Tool category).

Using the Time Warp tool in the Project window

In the Project window there are two modes for the Time Warp tool:

- In the default mode, all tracks are temporarily switched to linear time base when you use the tool. This means that all tracks will keep their absolute time positions when you adjust the tempo track.
- In the “musical events follow” mode, no tracks are switched to linear time base. This means that all tracks (that are not set to linear time base) will follow the changes you make to the tempo track.

You select the Time Warp mode by selecting the tool, clicking on the tool icon and selecting from the pop-up menu that appears.



Matching a musical score to video

Here's an example of how to use the Time Warp tool in “musical events follow” mode. Let's say you are creating the music for a film. You have a video track, an audio track with a commentary and some audio and/or MIDI tracks with your music. Now you want to match the position of a musical cue to a position in a video film. The musical cue happens in bar 33. There are no tempo changes in the project (yet).


1. Make sure tempo track mode is selected in the Transport panel.
2. Now you need to locate the position in the video. If you don't need very high precision, you can simply locate it looking at the thumbnails on the video track – otherwise you can pinpoint the exact position and add a marker to the Marker track (that you can snap to later on).
If you are using Cubase SX, you could also make a note of the exact position and add an extra ruler track set to show time code.

- 3.** Make sure the correct tracks are set to linear time base or musical time base, respectively.

In our example we want the video track and the audio track with a commentary voiceover to be linear time based (as well as the marker track, if you are using one). All other tracks should be set to musical time base. You change this by clicking the time base button in the Track list or Inspector.



Musical time base selected.



Linear time base selected.

- 4.** Set up the Grid Type pop-up menu as desired.

When you click with the Time Warp tool, it snaps to the selected grid. In this case, the musical cue happens at the start of bar 33, so we can set the grid to "Bar".


- Note that this affects the snapping to the ruler (tempo grid) *when you click!* In addition, the tool can be "magnetic" to events in the Project window *when you drag* – for this you need to activate Snap and select "Events" on the Snap pop-up menu.

In our example, this would be useful if you created a marker at the desired position in the video – when you drag the grid (see below), it will snap to the marker.

- 5.** Select the Time Warp tool and select the "musical events follow" mode.

6. Click in the event display at the start of bar 33 and drag to the desired position in the video.

As mentioned above, this can mean dragging to a position indicated by the thumbnails on the video track, to a marker on the Marker track or to a time position on an additional ruler track (Cubase SX only).

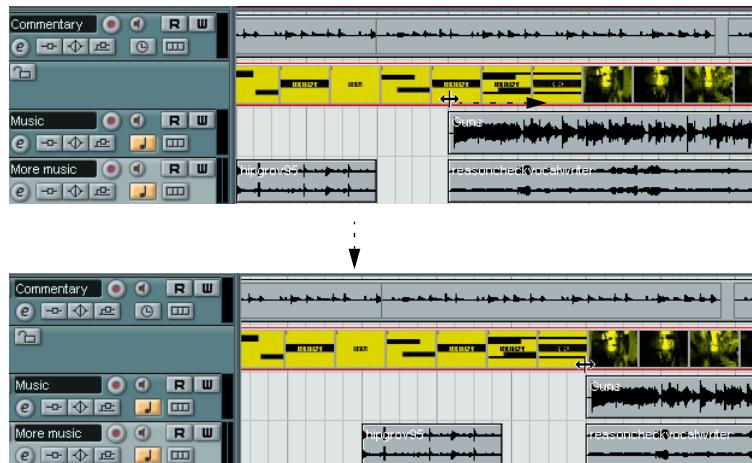

When you drag, you will see the ruler being scaled – and the music tracks will follow.

7. Release the mouse button.

If you look in the ruler at the beginning of the project, you will see that the first (and only) tempo event has been adjusted.

8. Try playing back.


The musical cue should now happen at the correct position in the video.

OK, let's say you need to match another cue to another position later on in the video. If you simply repeat this procedure, you will find that the first cue gets out of sync – since you are still changing the first (and only) tempo event on the Tempo track!

You need to create a “lock point” – a tempo event at the first cue position:

9. Press [Shift] and click with the Time Warp tool in the event display at the cue position.

In our case this is bar 33.



As you can see, a tempo event (with the same value as the first one) is added at that position.

10. Now match the next musical cue to the next video position, by dragging the musical position to the desired time position as before.

The new tempo event is edited – the first tempo event is unaffected and the original cue is still matched.

- If you know you are going to match several cues this way, you should make it a habit to press [Shift] each time you use the Time Warp tool to match positions.

This adds a new tempo event – that way you don't have to add tempo events afterwards as in step 9 above.

About snapping

If Snap is activated in the Project window and “Events” is selected on the Snap pop-up menu, the Time Warp tool will be magnetic to events when you drag the tempo grid. This makes it easier to snap a tempo position to a marker, the start or end of an audio event, etc.

Using the Time Warp tool in an audio editor

Using the Time Warp tool in the Sample Editor or Audio Part Editor is different from using it in the Project window, in the following ways:

- When you use the Time Warp tool, a tempo event is automatically inserted at the beginning of the edited event or part – this tempo event will be adjusted when you warp the tempo grid with the tool. This means that material before the edited events won't be affected.
- There is only one mode for the Time Warp tool in the audio editors: When you use the tool, the edited track is temporarily switched to linear time base.

Making a tempo map for a “free” recording

The following example shows how to use the Time Warp tool in the Sample Editor to create a tempo map matching freely recorded music. Let's say you have recorded a drummer, playing without a metronome – this typically means the tempo varies every so slightly. To be able to add sequenced material and easily rearrange the recorded audio, you want the tempo in Nuendo to match the recorded drum track:

1. If necessary, move the recorded event to its desired start position. Move it so that the first downbeat (“one”) happens on the start of the desired bar – zoom in if needed.
2. Open the drum recording in the Sample Editor and make sure Hit-point mode isn't selected.
The Time Warp tool cannot be used in Hitpoint mode – however, if you have calculated hitpoints already these will be visible when the Time Warp tool is selected (see below).
3. Set the zoom so that you can see the individual drum hits clearly. To achieve this type of “visual” beat matching, it's important to have a fairly clean recording, such as the drum track in this example.
4. Select the Time Warp tool.


You have already matched the first downbeat with the start of a bar. However, if the recording starts before the first downbeat (with a fill, some silence, etc.) you want to “lock” the first downbeat so that it stays in position:

5. Press [Shift] and click in the event at the position of the first downbeat (the start of the bar).

When you press [Shift], the pointer turns into a pencil. Clicking adds a tempo event at the first downbeat – when you later adjust the tempo with the Time Warp tool, the first downbeat will stay in place. Note: if the event started exactly on the first downbeat (no audio before the “one”) you wouldn’t need to do this. This is because a tempo event is automatically added at the start of the edited event.

6. Now, locate the start of the next bar in the ruler.
7. Click at that position in the event display and drag the position to the downbeat of the second bar in the recording.

When you click, the pointer will snap to the ruler grid.

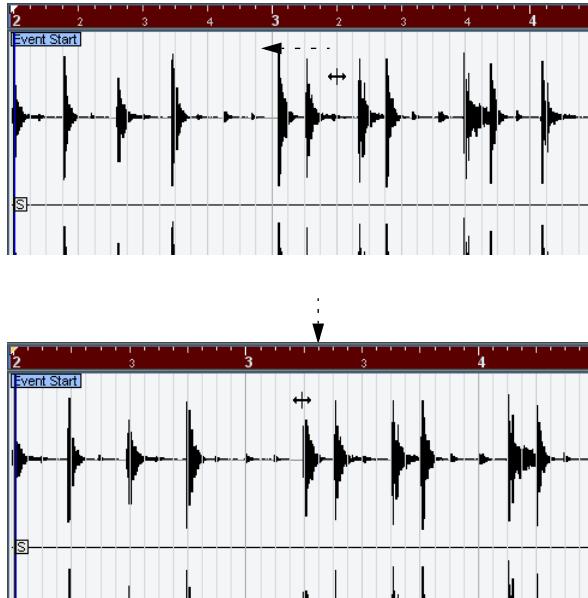

You mustn't necessarily match the downbeats (“ones”) – in this figure beat “2” in the second bar is matched to the “two” in the recording's second bar (simply because the snare drum hits on the upbeats are easier to spot in the waveform image).

When you dragged the grid you changed the tempo value in the tempo event at the first downbeat. If the drummer held a fairly consistent tempo, the following bars should now match pretty well too.

- 8.** Check the following bars and locate the first position where the audio drifts from the tempo.

Now, if you simply adjusted that beat in the tempo grid to match the beat in the recording, the tempo event at the first downbeat would be changed – this would ruin the match in the previous bars! We need to lock these by inserting a new tempo event.

- 9.** Locate the last beat that's in sync.

This would be the beat just before the position where the audio and tempo drift apart.

- 10.** Press [Shift] and click at that position to insert a tempo event there.

This locks this matched position – the material to the left will not be affected when you make adjustments further along.

- 11.** Now match the tempo grid to the next (unmatched) beat by clicking and dragging with the Time Warp tool.

The tempo event you inserted in step 10 will be adjusted.

- 12.** Work your way through the recording this way – when you find that the recording drifts from the tempo, repeat steps 9 to 11 above.

Now the Tempo track follows the recording and you can add sequenced material, rearrange the recording etc.

Matching to hitpoints

If you have calculated hitpoints for the audio event you are editing, these will be shown when the Time Warp tool is selected.

- The number of hitpoints shown depends on the Hitpoint Sensitivity slider setting you've made in Hitpoint mode.
- If you activate the Snap to Zero Crossing button on the toolbar, the Time Warp tool will snap to hitpoints when you drag the tempo grid.
- If you use the Create Markers function on the Audio-Advanced submenu, markers will be created at the hitpoint positions. This can be useful when using the Time Warp tool in the Project window, as the tool will be magnetic to markers (if Snap to Events is activated on the toolbar).

Using the Time Warp tool in a MIDI editor

This is very similar to using the tool in an audio editor:

- When you use the Time Warp tool, a tempo event is automatically inserted at the beginning of the edited part – this tempo event will be adjusted when you warp the tempo grid with the tool. This means that material before the edited part won't be affected.
- There is only one mode for the Time Warp tool in the MIDI editors: When you use the tool, the edited MIDI track is temporarily switched to linear time base.
- The rulers in the MIDI editors can be set to "Time Linear" or "Bars+Beats Linear" mode (see [page 493](#)) – the Time Warp tool requires Time Linear mode. If necessary, the ruler mode will be switched when you select the Time Warp tool.
- If Snap is activated on the toolbar in the MIDI editor, the tool will snap to the start and end of MIDI notes when you drag the tempo grid.

Typically, you would use the Time Warp tool in a MIDI editor to match the Nuendo tempo to freely recorded MIDI material (much like the audio example above).

24

The Project Browser


Background

While the Project window and the editors display events and other data graphically, the Project Browser window provides a list based representation of the project. This allows you to view and edit all events on all tracks by using regular value editing in a list.

Opening the Project Browser

You open the Project Browser by selecting “Browser” from the Project menu. The Browser window can be open while you are working in other windows; any changes made in the Project window or an editor are immediately reflected in the Project Browser and vice versa.

Window Overview

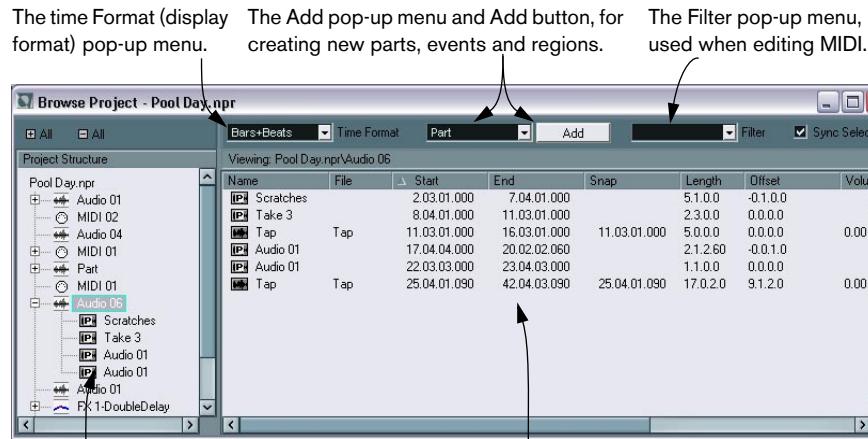


The Project Structure list. This is where you navigate through the project.

The event display. This is where you view and edit parts, events and Regions.

Navigating in the Browser

You use the Project Browser much like you use the Mac OS X Finder and Windows Explorer for browsing folders on your hard disk:


- Click on an item in the Project Structure list to select it for viewing. The contents of the item are shown in the event display.

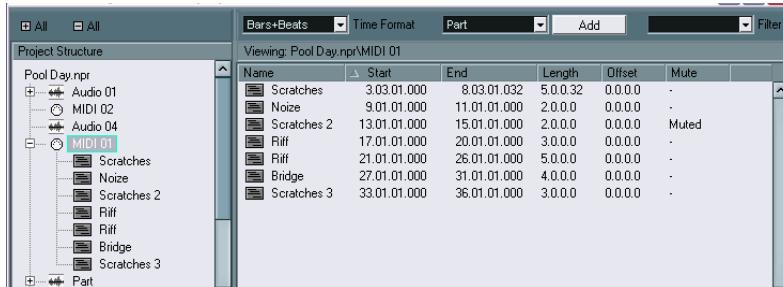

In this figure, the parts on a MIDI track are displayed.

- Items with hierarchical substructures can be folded out by clicking the plus symbols or the “Closed Folder” symbols in the Project Structure list.

When the substructure of an item is revealed, a minus symbol or an “Open Folder” symbol is shown instead – click this to hide the substructure.

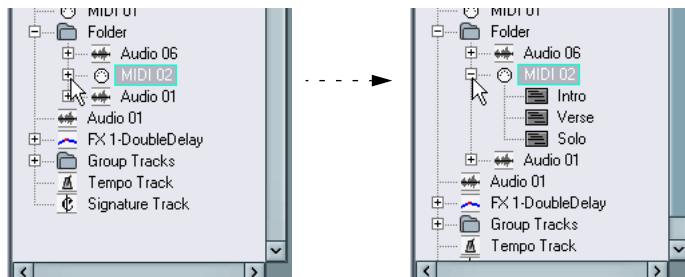

- To reveal or hide all substructures in the Project Structure list, use the buttons “(+) All” and “(-) All” above the list.
- The actual editing is done in the event display, using regular value editing techniques.

There is one exception: You can rename items in the Project Structure list by clicking on their names and typing.

Customizing the View

You can drag the divider between the Project Structure list and the event display to make one of them wider and the other narrower. Furthermore, the event display can be customized in the following ways:

- You can change the order of the columns by dragging the column headings to the left or right.
- You can resize columns by dragging the dividers between the column headings.
- To select a display format for all position and length values, use the Time Format pop-up menu.
- You can sort events in the display by columns, by clicking the column heading.

If you for example want to sort events by their start positions, click that column heading. An arrow appears in the column heading, indicating that events are sorted by that column. The direction of the arrow indicates whether the events are sorted in ascending or descending order. To change the direction, click the column heading again.

About the Sync Selection option

If the “Sync Selection” checkbox is activated (in the upper right corner of the Project Browser), selecting an event in the Project window automatically selects it in the Project Browser, and vice versa. This makes it easy to locate events in the two windows.


- **This function is only available when a single event or part is selected.**

Editing audio tracks

Audio tracks can have two “subitems”: Track Data and Automation.

- The Automation item corresponds to the Automation subtrack in the Project window, and contains the track's automation events (see [page 585](#)).
- The Track Data item corresponds to the actual audio track in the Project window. It contains audio events and/or audio parts, which in turn can contain audio events.

Note, that if you have not performed any automation or opened an automation subtrack, the Browser will only contain the audio data.

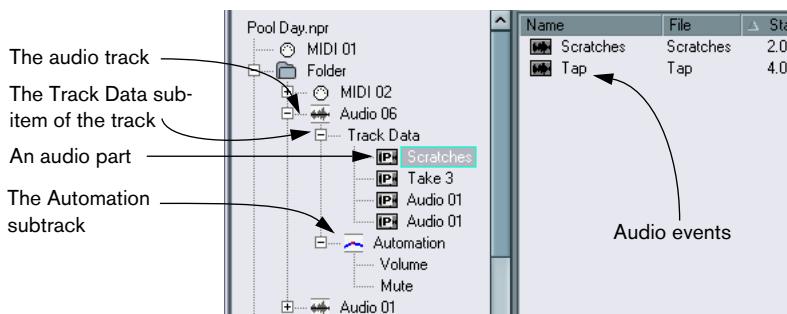

The following parameters are available for the different items:

The list columns for audio parts:

Parameter	Description
Name	The name of the part. Double clicking on the part symbol beside it opens the Audio Part Editor for the part.
Start	The start position of the part. Editing this value is the same as moving the part in the Project window.
End	The end position of the part. Editing this value is the same as resizing the part in the Project window.
Length	The length of the part. Editing this value is the same as resizing the part in the Project window.
Offset	This adjusts the start position of the events within the part. Adjusting this value is the same as sliding the contents of the part in the Project window (see page 125): setting a positive Offset value is the same as sliding the contents to the left, while a negative Offset corresponds to sliding the contents to the right.
Mute	Click in this column to mute or unmute the part.

The list columns for audio events:

Parameter	Description
Name	Allows you to enter a descriptive comment for the event. Double clicking on the waveform image beside it opens the Sample Editor for the event.
File	The name of the audio file referred by the event's audio clip.
Start	The start position of the event. If the event belongs to an audio part, you cannot move it outside the part.
End	The end position of the event.
Snap	The absolute position of the event's snap point. Note that adjusting this value will not change the position of the snap point within the event – instead it is another way of moving the event!
Length	The length of the event.
Offset	This determines “where in the audio clip” the event starts. Adjusting this value is the same as sliding the contents of the event in the Project window (see page 125). You can only specify positive Offset values, since the event cannot start before the start of the clip. Likewise, it cannot end after the end of the clip. If the event already plays the whole clip, the Offset cannot be adjusted at all.
Volume	The volume of the event, as set with the Volume handle or on the info line in the Project Window.
Fade In Fade Out	The length of the fade-in and fade-out areas respectively. If you use these settings to add a fade (where there previously was none), a linear fade will be created. If you adjust the length of an existing fade, the previous fade shape will be maintained.
Mute	Click in this column to mute or unmute the event.
Image	Displays a waveform image of the event inside a grey box corresponding to the clip. The image is scaled according to the width of the column.

Creating audio parts

When the “Audio” item of an audio track is selected in the Project Structure list, you can create empty audio parts on the track by clicking the Add button on the toolbar. This will insert a part between the left and right locator.

Editing MIDI tracks

Just like audio tracks, MIDI tracks can have two “subitems”: Track Data and Automation.

- The Track Data item corresponds to the actual MIDI track in the Project window and can contain MIDI parts (which in turn can contain MIDI events).
- The Automation item corresponds to the automation subtrack in the Project window, and contains the track's automation events (see [page 585](#)).

Note, that if you have not performed any automation or opened an automation subtrack, the Browser will only contain the MIDI data.

When editing the Track Data, the following parameters are available:

The list columns for MIDI parts:

Parameter	Description
Name	The name of the part.
Start	The start position of the part. Editing this value is the same as moving the part.
End	The end position of the part. Changing this is the same as resizing the part (and will automatically affect the Length value as well).
Length	The length of the part. Changing this resizes the part and automatically changes the End value.
Offset	This adjusts the start position of the events within the part. Adjusting this value is the same as sliding the contents of the part in the Project window (see page 125): setting a positive Offset value is the same as sliding the contents to the left, while a negative Offset corresponds to sliding the contents to the right.
Mute	Click in this column to mute or unmute the part.

The list columns for MIDI events:


Parameter	Description
Type	The type of MIDI event. This cannot be changed.
Start	The position of the event. Editing this value is the same as moving the event.
End	This is only used for note events, allowing you to view and edit the end position of a note (thereby resizing it).
Length	This is only used for note events. It shows the length of the note – changing this resizes the note and automatically changes the End value as well.
Data 1	The property of this value depends on the type of MIDI event: For notes, this is the note number (pitch). This is displayed and edited as a note name and an octave number, with the values ranging between C-2 and G8. For Controller events, this is the type of Controller, displayed in words. Note that you can edit this by entering a number – the corresponding Controller type is automatically displayed. For Pitch Bend events, this is the fine adjustment of the bend amount. For Poly Pressure events, this is the note number (pitch). For other event types, this is the value of the event.
Data 2	The property of this value depends on the type of MIDI event: For notes, this is the note-on velocity. For Controller events, this is the value of the event. For Pitch Bend events, this is the coarse bend amount. For Poly Pressure events, this is the amount of pressure. For other event types, this is not used.
Channel	The event's MIDI Channel. See page 71 .
Comment	This column is used for some event types only, providing an additional comment about the event.

- **For SysEx (system exclusive) events, you can only edit the position (Start) in the list.**

However, clicking the Comment column opens the SysEx Editor, in which you can perform detailed editing of system exclusive events. This and other aspects of working with system exclusive messages are described in the separate document “MIDI devices and features”.

Filtering MIDI events

When you are editing MIDI in the Project Browser, the large number of different MIDI events displayed can make it hard to find your way. To remedy this, the Filter pop-up menu allows you to select a single event type for display.



When this option is selected, only Program Change events will be shown in the event display. To reveal all event types, select the top item ("---") from the menu.


Creating MIDI parts

When a MIDI track is selected in the Project Structure list, you can create empty MIDI parts on the track by clicking the Add button. This will insert a part between the left and right locator.

Creating MIDI events

You can use the Project Browser to create new MIDI events, in the following way:

1. Select a MIDI part in the Project Structure list.
2. Move the project cursor to the desired position for the new event.
3. Use the Add pop-up above the event display to select which type of MIDI event to add.




4. Click the Add button.

An event of the selected type is added to the part, at the project cursor position. If the cursor is outside the selected part, the event is added at the beginning of the part.

Editing Automation tracks

All kinds of Nuendo automation (the automation subtracks for MIDI, audio, group and FX channel tracks or the individual automation tracks for VST Instruments, ReWire channels or Input/Output busses) are handled in the same way in the Project Browser. Each Automation item in the Project Structure list will have a number of subentries, one for each automated parameter. Selecting one of these parameters in the Project Structure list shows its automation events in the list:

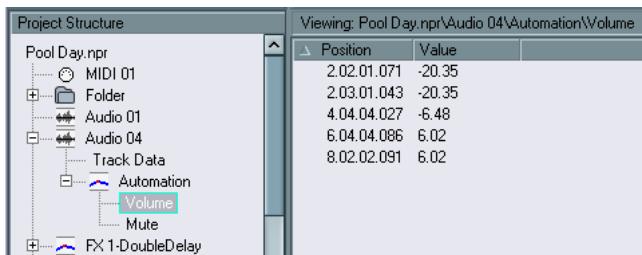

You can use the two columns in the list to edit the position of the events and their values.

Editing the Video track

When the Video track is selected in the Project Structure list, the event display lists the video events on the track, with the following parameters:

Column	Description
Name	The name of the video clip that the event refers to.
Start	The start position of the event. Editing this value is the same as moving the event.
End	The end position of the event. Editing this value is the same as resizing the event, and will automatically change the Length value as well.
Length	The length of the event. Editing this value is the same as resizing the event, and will automatically change the End value as well.
Offset	This determines "where in the video clip" the event starts. Note that the event cannot start before the start of the clip, or end after the end of the clip. Thus, if the event already plays the whole video clip, the Offset cannot be adjusted at all.

Editing the Marker track

Marker events have the following parameters:

Column	Description
Name	The name of the marker. This can be edited for all markers except the left and right locator.
Start	The position of “regular” markers or the start position of cycle markers.
End	The end positions of cycle markers. Editing this value is the same as resizing the cycle marker, and will automatically change the Length value as well.
Length	The length of cycle markers. Editing this value is the same as resizing the marker, and will automatically change the End value as well.
ID	<p>The number of the marker. For regular (non-cycle) markers, this corresponds to the key commands used for navigating to the markers. For example, if a marker has ID 3, pressing [3] on the computer keyboard will move the song position to that marker. By editing these values, you can assign the most important markers to key commands.</p> <p>Note that you cannot edit the “L” and “R” marker IDs (Left and Right locator) or assign IDs 1 and 2 to markers (since these are reserved for the locators).</p>

When the Marker track is selected, you can insert markers selecting “Marker” or “Cycle Marker” from the Add pop-up menu and clicking the Add button. Regular markers will be added at the current project cursor position while cycle markers will be added between the current left and right locator positions.

Editing the Tempo track

When Tempo track is selected in the Project Structure list, the event display shows the events on the Tempo track, with the following parameters:

Parameter	Description
Position	The position of the Tempo event. You cannot move the first event on the Tempo track.
Tempo	The tempo value of the event.
Type	This indicates whether the tempo should jump to the value of the event ("Jump" type) or whether it should change gradually from the previous Tempo event, creating a ramp ("Ramp" type). See page 554 .

You can add new Tempo events by clicking the Add button. This creates a Jump-type event with the value 120 bpm, at the project cursor position. Make sure that there is no other tempo event at the current cursor position.

Editing Time Signatures

When "Signature track" is selected in the Project Structure list, the event display shows the Time Signature events in the project:

Parameter	Description
Position	The position of the event. Note that you cannot move the first Time Signature event.
Signature	The value (time signature) of the event.

You can add new Time Signature events by clicking the Add button. This creates a 4/4 event, at the beginning of the bar closest to the project cursor position. Make sure that there is no other time signature event at the current cursor position.

Deleting Events

The procedure for deleting Events is the same for all different Track types:

1. Click on an Event (or a Part) in the Event display to select it.
2. Select Delete from the Edit menu or press [Delete] or [Backspace].

Note that you cannot delete the first Tempo Event or the first Time Signature Event.


25

The Track Sheet

Overview

The Track Sheet provides a text-form “flow-chart” representation of the Project. It lists all audio tracks and their contents, and can easily be printed out.

To open the Track Sheet window, select “Track Sheet” from the Project menu.

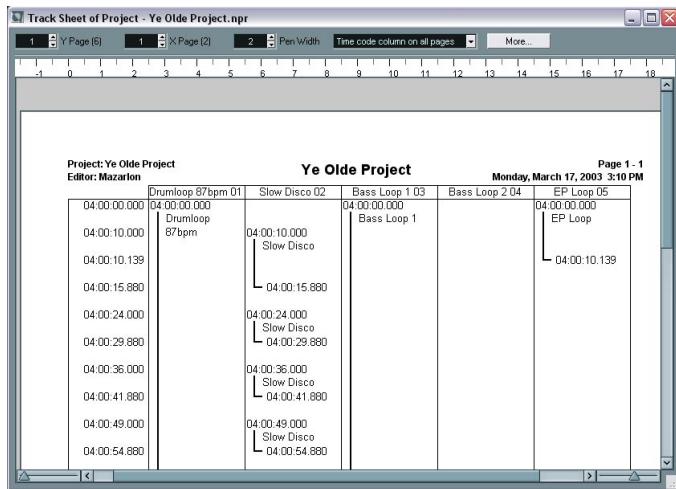

The actual Track Sheet is displayed in the lower part of the window. It contains the following items:

- The leftmost time column contains a list of time positions in the display format selected in the Project Setup dialog.
The time positions relate to start and end times of audio or video events or parts on the tracks.
- The following columns display the track names in the order they appear in the Track list.
Only audio tracks are shown.
- The events are listed in their corresponding track columns in the order they appear (starting at the top).
- For each event, the start and end times are shown, with a vertical line binding the two together.

Viewing the pages in the Track Sheet

If your project is large (i.e. there are many tracks and/or many events) or if you are working with a large scale factor (see below), the resulting Track Sheet may have more than one page.

The more tracks you have, the larger the number of pages next to each other (horizontally). The more Events you have, the larger the number of pages below each other.

To select which page should be visible in the Track Sheet window, you use the “Y Page” and “X Page” fields in the upper left part of the Track Sheet window. You could think of the Track Sheet as divided into rows and columns, with “Y Page” determining which row should be viewed and “X Page” determining the column. The numbers in parenthesis show the total number of rows and columns, respectively.



In this case, the page in row 2 and column 3 is shown:

	X 1	2	3	4
Y 1				
2				

- The size and proportions of the Track Sheet pages are set with the Page Setup dialog, as described on [page 594](#).

Adjusting the view

The two sliders at the bottom of the Track Sheet window have the following functionality:

- The slider in the lower left corner is the scale slider.
Use this to adjust the actual size of the Track Sheet contents (including the font sizes). This will also affect the number of tracks and events shown on each page.
- The slider in the lower right corner governs the display zoom.
This affects how much of the Track Sheet is shown in the Track Sheet window – the printout is not affected.

You can also adjust the width of the columns by dragging the edges of the “Timecode” and “Tracks” fields at the top of the window - this resizes the corresponding columns in the Track Sheet.



Resizing the track columns. If the Timecode and Tracks fields are hidden, click the “More” button.

Additional settings

- The “Pen Width” determines the thickness of the vertical lines that bind together the start and end times for events and parts.
- If the Track Sheet is more than one page wide, you can use the “Time Code Column” pop-up menu to determine whether the time column should appear only on the first page, on each new page, or not at all.

The following settings can be shown or hidden by clicking the “More/Less” button.

Setting	Description
Project	By default, this is the name of the current project, but you can adjust this if you like. The project name will be shown in the top left corner of each Track Sheet page.
Editor	The editor name you enter will be shown below the project name in the Track Sheet.
Heading	Allows you to enter a heading (shown centered at the top of each Track Sheet page).
Do not show end times if length is under...	If this checkbox is ticked, the Track Sheet will not display the end times of Events shorter than the time specified in the field to the right. This is useful if you have many short events, like spot effects, where only the start time is of any relevance.
No leading zeroes	By default, the time positions of events will be listed in a syntax with “leading zeroes”. E.g. if the display format is seconds, hours and minutes will be listed as “01”, “02” etc. If this is activated, the time column will not display the leading zeroes.
Merge events if gap is less or equal...	If events on a track are lined up end to end – i.e. there is no gap between them – they will be considered as a single event in the Track Sheet. By defining a value in this box, you can specify how large a gap between events has to be for them to be considered as separate events. If gaps between events are smaller than or equal to the value you specify, they will be listed as a single event. Otherwise they will be listed as separate events.
Name Filter	This allows you to filter out certain event names of your choice so that they are not displayed in the Track Sheet. Click in the text field and type in the name(s) – to enter several names, separate each with a semi-colon (;). Partial names are OK, so if you e.g. want to filter out the event name “Crossfade”, you could just write “Cross”. However, this would filter out other events starting with the word cross as well – e.g. “Crosstalk” would also be filtered out.

Printing the Track Sheet

Printing is done using the standard procedures:

1. Make sure the correct page size and page orientation is selected in the Page Setup dialog on the File menu.

You may also want to make additional printer settings, following the standard Windows/Mac procedures.

2. Select “Print...“ from the File menu.

Make the desired printer settings in the dialog that appears, and click OK. The Track Sheet is printed.

26

Export Audio Mixdown

Introduction

The Export Audio Mixdown function in Nuendo allows you to mix down audio from the program to a file on your hard disk, in a number of formats. You can choose to mix down one of the following:

- An output bus.

For example, if you have set up a stereo mix with tracks routed to a stereo output bus, mixing down that output bus would give you a mixdown file containing the whole mix. Similarly, you can mix down a complete surround bus, either to a single multi-channel file (interleaved) or to one file per surround channel (split).

- The channel for an audio track.

This will mix down the channel for the track, complete with insert effects, EQ, etc. This can be useful for turning a number of events into a single file, or if you are using CPU-intensive insert effects – by exporting the track and re-importing it into the project you can turn off the insert effect, saving processor power.

- Any kind of audio channel in the mixer.

This includes VST Instrument channels, effect return channels (FX Channel tracks), Group channels and ReWire channels. There are many uses for this – for example, you can easily “freeze” a VST Instrument performance, converting it to an audio file (after which you can turn off the VST Instrument and save processor power). Similarly, you can mix down an effect return track or turn individual ReWire channels into audio files.

Notes

- The Export Audio Mixdown function mixes down the area between the left and right locator.

- When you mix down, you get what you hear – mutes, mixer settings and insert effects are taken into account.

Note though that you will only include the sound of the bus or channel you select for mixdown.

- MIDI tracks are not included in the mixdown!

To make a complete mixdown containing both MIDI and audio, you first need to record all your MIDI music to audio tracks (by connecting the outputs of your MIDI instruments to your audio inputs and recording, as with any other sound source).


- You can also export selected *tracks* – this is a different function that doesn’t create an audio mixdown.

Rather, this is a way to transfer complete tracks (including clips and events) from one project to another. See [page 684](#).

Mixing down to an audio file

1. Set up the left and right locator to encompass the area that you want to mix down.
2. Set up your tracks, so that they play back the way you want. This includes muting unwanted tracks or parts, making manual mixer settings and/or activating the R (Read) automation buttons for some or all mixer channels.
3. Pull down the File menu and select “Audio Mixdown...” from the Export submenu.

The Export Audio Mixdown dialog appears.

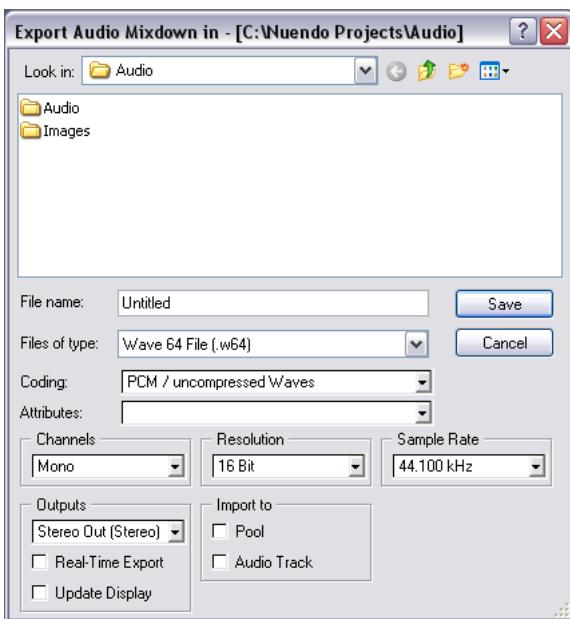

The upper half of this dialog is a standard file dialog, while the lower half contains file format options and settings for the mixdown function. Note that the available settings and options differ depending on the selected file format (see [page 599](#)).

4. Select the bus or channel you want to mix down with the Outputs pop-up menu.

This lists all output busses and channels in the active project.

5. Select the channel configuration for the mixdown file with the Channels pop-up menu.

Typically you would select the same channel configuration as the bus or channel you're mixing down, but it's also possible to e.g. mix down a stereo bus to a mono file. In this case a warning will appear, asking if that's what you want to do.

Here you will also find the "N. Chan. Split" and "N. Chan. Interleaved" options – these allow you to create a surround mixdown file (either as one mono file per surround channel – split – or as a single multi-channel file – interleaved).

- The Channels pop-up and the "N. Chan" options are only available when an uncompressed file format is selected (AIFF, uncompressed Wave, Wave64 or Broadcast Wave).**

For the other formats you can select stereo or mono using controls that are specific to each format. When mixing down to 5.1 Surround, you also have the option to mix down to Windows Media Audio Pro (Windows only) – see [page 609](#).

6. Select a file format with the File type pop-up menu.

7. Make additional settings for the file to be created.

This includes selecting sample rate, resolution, quality, etc. The available options depend on the selected file format – see [page 599](#).

- 8. If you want to automatically import the resulting audio file back into Nuendo, activate the "Import to" checkboxes.**

If you activate the "Pool" checkbox, a clip referring to the file will appear in the Pool. Activating the "Audio Track" checkbox as well will create an audio event that plays the clip, and place it on a new audio track, starting at the left locator.

- The Import options are only available if you have selected an uncompressed file format (AIFF, uncompressed Wave, Wave64 or Broadcast Wave files).**

- 9. If you activate Real-Time Export, the export will happen in real time, i.e. the process will take the same time as regular playback.**

Some VST plug-ins require this to have time to update correctly during the mixdown – consult the plug-in manufacturers if uncertain.

- 10. If you activate Update Display, the meters will be updated during the export process.**

This allows you to check for clipping, for example.

- 11. Select a folder and a name for the audio file to be created.**

- With some file formats you can create split stereo files (see [page 600](#)). This will create two files (one for each side) with the same name, but with the letter “L” appended for the left channel file and “R” for the right channel file.

In the same way, split multi-channel (surround) files will have the same name followed by a number indicating the surround channel.

12. Click Save.

- Depending on the file format, an additional dialog may appear. For example, when exporting to MP3 format a dialog appears where you can add info about the song title, artist, etc. Make the desired settings and click OK to proceed.

A dialog with a progress bar is displayed while the audio file is created. If you change your mind during the file creation, you can click the Abort button to abort the operation.

- If you have activated any of the “Import to” options, the file will be imported back into the project.

When playing back the re-imported file in Nuendo, remember to mute the original tracks so that you really hear the true result.

File format specifics

The following pages describe the different export file formats, and their options and settings.

- AIFF files (see [page 600](#)).
- Sound Designer II files (Mac OS X only, see [page 602](#)).
- Wave files (see [page 602](#)).
- Wave 64 files (see [page 604](#)).
- Broadcast Wave files (see [page 604](#)).
- MP3 files (see [page 605](#)).
- MP3Pro files (see [page 605](#)).
- Ogg Vorbis files (see [page 606](#)).
- Real Audio G2 files (see [page 607](#)).
- Windows Media Audio files (see [page 608](#)).
- Windows Media Audio Pro files (see [page 609](#)).
- Steinberg also offers optional Dolby Digital (AC3) and DTS encoders for export directly to AC3 or DTS format.**

Please go to www.steinberg.net for more information.

AIFF files

AIFF stands for Audio Interchange File Format, a standard defined by Apple Computer Inc. AIFF files have the extension ".aif" and are used on most computer platforms. The following settings are available for the AIFF export file format:

Channels

Option	Description
Mono	The audio is mixed down to mono.
Stereo Split	Two mono files are created, one for each side of the stereo mix. The files will have the name you specify in the dialog, but with "L" and "R" added, respectively. Select this format if you plan to use the resulting file in another application that doesn't support stereo interleaved files. If you plan to re-import the file into Nuendo, we recommend that you use the Stereo Interleaved option instead, since Nuendo doesn't automatically handle stereo split files as one entity.
Stereo Interleaved	A stereo audio file is created. This is the recommended stereo option if you want to re-import the file into Nuendo.
N. Chan. Split	This is used when you want to export surround channels or mixes (busses). Exporting with this option will create a set of mono files, with each file containing the audio of one of the surround channels. The number and configuration of the channels depends on the format of the output bus (or channel) you have selected on the Outputs pop-up menu. For example, if you have selected a 5.1 output bus this will result in six mono audio files. They will have the name specified in the File name field above, followed by a number (1-6).
N. Chan. Interleaved	This is used when you want to export surround channels or mixes (busses). Exporting with this option will create a single audio file containing all surround channels. The number and configuration of channels in the interleaved file depends on the format of the output bus (or channel) you have selected on the Outputs pop-up menu. For example, if you have selected a 5.1 output bus this will result in a 5.1 audio file (containing six channels).

Resolution

Allows you to select 8, 16, 24 bit or 32 bit (float) files.

- If the file is an “intermediate mixdown” that you plan to re-import and continue working on in Nuendo, we recommend that you select the 32 bit (float) option. 32 bit (float) is a very high resolution (the same resolution as used internally for audio processing in Nuendo), and the audio files will be twice the size of 16 bit files.
- If you are making a mixdown for CD burning, you should use the 16 bit option, as CD audio is always 16 bit.
In this case, we recommend that you activate the UV-22HR dithering plug-in (see [page 239](#)). This reduces the effects of quantization noise and artifacts from being introduced when converting the audio down to 16 bit.
- 8 bit resolution should only be used if required, since it will result in limited audio quality.
8 bit audio may be suitable in some multimedia applications, etc.

Sample Rate

This is the sample rate of the exported file (up to 384 kHz). In most cases, you should select the sample rate set for the project, since a lower sample rate will degrade the audio quality (mainly reducing the high frequency content) and a higher sample rate will only increase the file size, without adding to audio quality. Also consider the future usage of the file – if you e.g. plan to import the file into another application, you should select a sample rate supported by that application.

- If you are making a mixdown for CD burning, you should select 44.100 kHz, since this is the sample rate used on audio CDs.

Broadcast options (embedded information)

AIFF files exported from Nuendo can have some additional information embedded: date and time of creation, a timecode position (allowing you to insert exported audio at the correct position in other projects, etc.) along with author, description and reference text strings.

- If the option “Include Broadcast Options in created AIFF Files” is activated in the Preferences (Record-Broadcast Wave page), the exported AIFF file will contain embedded information.
Some applications may not be able to handle AIFF files with embedded info - if you get problems using the file in another application, turn off the option and re-export.

- If the option “Show Broadcast Options for AIFF Export” is activated on the same page, a dialog will appear when you click Save to export the file - use this to enter the desired embedded information. You can enter default text strings for author, description and reference on the same Preferences page - these will automatically appear in the Broadcast Options dialog when it appears.

Sound Designer II files (Mac OS X only)

The SD II format was developed by Digidesign. It is one of the most popular audio file formats on the Macintosh, especially for professional audio work. The following export settings are available:

Channels

Allows you to select mono or stereo files, with the same options as for AIFF files (see [page 600](#)).

Resolution

The bit resolution of the file, with the same options as for AIFF files (see [page 601](#)), except that 32-bit (float) files are not supported.

Sample Rate

The options are the same as for AIFF files. See [page 601](#).

Wave files

Wave files have the extension “.wav” and are the most common file format on the PC platform. Wave files can be uncompressed or compressed, as described below. For uncompressed Wave files (the most common choice), the following settings are available:

Channels

Allows you to select mono, stereo or multi-channel files with the same options as for AIFF files (see [page 600](#)).

Resolution

The bit resolution of the file, with the same options as for AIFF files (see [page 601](#)).

Sample Rate

The options are the same as for AIFF files. See [page 601](#).

Coding (Windows only)

The Coding pop-up menu allows you to select a compression scheme for the Wave file, creating smaller files (with a loss of audio quality).

- Which options are available depends on the installed and activated codecs in the ACM (Audio Compression Manager) under Windows.
See the operating system documentation for details.
- When a compression option is selected, not all Channels, Resolution and Sample Rate options may be available (depending on the selected compression scheme).

The Attributes pop-up menu displays the currently selected properties for the file.

- For regular, uncompressed Wave files, select “PCM / uncompressed Waves”.

Wave files exported by Nuendo for Mac OS X are always uncompressed.

Broadcast options (embedded information)

Wave files exported from Nuendo can have some additional information embedded: date and time of creation, a timecode position (allowing you to insert exported audio at the correct position in other projects, etc.) along with author, description and reference text strings.

- If the option “Include Broadcast Options in created WAVE Files” is activated in the Preferences (Record-Broadcast Wave page), the exported Wave file will contain embedded information.
Some applications may not be able to handle Wave files with embedded info - if you get problems using the file in another application, turn off the option and re-export.
- If the option “Show Broadcast Options for WAVE Export” is activated on the same page, a dialog will appear when you click Save to export the file - use this to enter the desired embedded information.
You can enter default text strings for author, description and reference on the same Preferences page - these will automatically appear in the Broadcast Options dialog when it appears.

Wave64 files

Wave64 is a proprietary format developed by Sonic Foundry Inc. In terms of audio quality, Wave64 files are identical to standard wave files, but there is one major difference:

- In the file headers, Wave64 files use 64-bit values for addressing where wave files use 32-bit values. The consequence of this is that wave64 files can be considerably larger than standard wave files. Wave64 is therefore a good file format choice for really long recordings (file sizes over 2GB), e.g. live surround recordings.

Wave64 files have the same options as regular wave files (see [page 602](#)) and have the extension “.w64”.

- If the option “Show Broadcast Options for WAV64 Export” is activated in the Preferences (Record-Broadcast Wave page) a dialog will appear when you click Save to export the file.

This allows you to enter information (date and time, description strings etc.) to be embedded in the file. Note that you can enter default text strings for author, description and reference on the same Preferences page - these will automatically appear in the Broadcast Options dialog when it appears.

Broadcast Wave files

Audio-wise, Broadcast Wave files are the same as regular Wave files. They have the same options as Wave files, but there are no Coding (compression) options for Broadcast Wave files.

If the option “Show Broadcast Options for Broadcast WAVE Export” is activated in the Preferences (Record-Broadcast Wave page) a dialog will appear when you click Save to export the file. This allows you to enter information to be embedded in the file: date and time of creation, a timecode position (allowing you to insert exported audio at the correct position in other projects, etc.) and author, description and reference text strings.

- You can enter default text strings for author, description and reference in the Preferences dialog (Record–Broadcast Wave page). These will automatically appear in the Broadcast Options dialog when it appears.
- If you don't want to add embedded information, you can deactivate “Show Broadcast Options” in the Preferences.

MPEG Layer 3 files

MPEG Layer 3 files have the extension “.mp3”. By use of advanced audio compression algorithms, mp3 files can be made very small, maintaining good audio quality.

The following options are available for MPEG Layer 3 files:

Channels

Use the radio buttons to select mono or stereo files. This setting affects which options are available on the Attributes pop-up menu (see below).

Sample Rate

Determines the frequency range of the audio – the lower the sample rate, the lower the highest audible frequency in the audio. This setting will also affect which options are available on the Attributes pop-up menu, as described below.

Attributes

This pop-up menu allows you to select a bit rate for the mp3 file. As a rule, the higher the bit rate, the better the audio quality and the larger the file. For stereo audio, 128 kBit/s is often considered to result in “good” audio quality.

- Note that the available options on this pop-up menu depend on the Channels and Sample Rate settings.

This is because for mono audio and/or low sample rates, there is no point in using the highest bit rates – they would simply create larger files without adding to audio quality.

Quality

These options determine the “depth” of the encoding algorithm and thus the quality of the resulting file. In the “Highest” mode, the encoding will take the longest time, while in the “Fast” mode, the audio quality may be lower. The file size is not affected by these options.

MP3Pro

When this checkbox is activated, Nuendo will export to MP3Pro format. MP3Pro (MP3’s successor format) allows for smaller files compared to the MP3 format, but retains the sonic quality.

Options

When you click the Save button, an Options dialog opens in which you can enter information about the file. This additional information (called the ID3 tag) will be embedded as text strings in the file, and can be displayed by some mp3 playback applications.

- For the information to be included in the file, you need to activate the “Insert Options” checkbox in the dialog.

Ogg Vorbis files

Ogg Vorbis is an open, patent-free audio encoding and streaming technology, offering compressed audio files (extension “.ogg”) of small size but with comparatively high audio quality.

The following options are available for Ogg Vorbis files:

Channels

Use the radio buttons to select mono or stereo files.

Sample Rate

Determines the frequency range of the audio – the lower the sample rate, the lower the highest audible frequency in the audio.

Quality


The Ogg Vorbis encoder uses variable bit rate encoding, and the Quality setting determines between which limits the bit rate will vary. Generally speaking the higher the Quality setting, the higher the sound quality but also the larger the files.

Options

When you click the Save button, an Options dialog opens in which you can enter information about the file, as when creating mp3 files.

- For the information to be included in the file, you need to activate the “Insert Options” checkbox in the dialog.

Real Audio G2 files (Windows only)

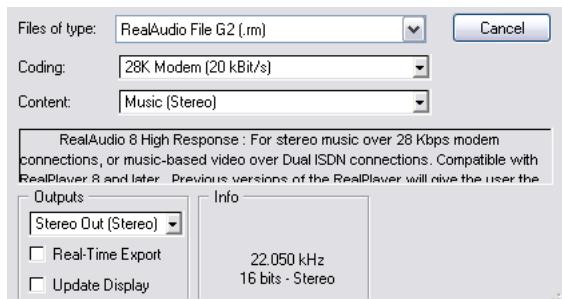

Real Audio files (extension “.rm”) allow very high compression rates and can therefore be made very small. This makes the format especially useful for downloading and streaming multimedia from the internet.

The following options are available for Real Audio files:

Coding and Content

This is where you specify the desired audio quality for the file. In the Real Audio G2 format, this information is divided in two pop-up menus: Coding (determining the bit rate) and Content (specifying the typical audio content – voice, music, etc.).


When you select a Coding/Content, a descriptive text appears in the field below the pop-up menu, describing the suitable use of the selected format.

- Note that the choice of mono or stereo is included in the Coding/Content options.

Options

When you click the Save button, an Options dialog opens in which you can select one or more modes (each explained in the dialog) for the file. You can also enter information about the file. These text strings will be embedded in the file and can be displayed by some Real Audio playback applications.

Windows Media Audio files (Windows only)

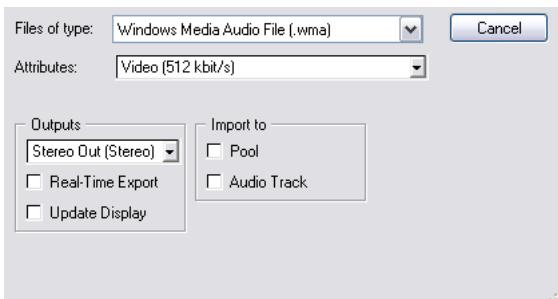

Windows Media Audio is an audio format developed by Microsoft Inc. Due to advanced audio compression algorithms, Windows Media Audio files can be made very small, maintaining good audio quality. The files have the extension ".wma".

The following options are available for Windows Media Audio files:

Attributes

This pop-up menu allows you to select a bit rate for the WMA file. As a rule, the higher the bit rate, the better the audio quality and the larger the file. For stereo audio, 96 kBit/s is often considered to give "good" audio quality.

Options



When you click the Save button, an Options dialog opens in which you can enter information about the title and author of the file, as well as copyright information and a description. These text strings will be embedded in the file and can be displayed by some Windows Media Audio playback applications.

Windows Media Audio Pro files (Windows only)

This is a continuation of the Windows Audio Media format (described above) developed by Microsoft Inc. Due to the advanced audio codecs and lossless compression used, WMA Pro files can be decreased in size with no loss of audio quality. Furthermore, WMA Pro features the possibility of mixing down to 5.1 surround sound. The files have the extension ".wma".

- Click the Options button to open a dialog in which you can make settings for the Windows Media Audio files. When you have made the desired settings, click OK to encode the file.



The following options are available:

Input Stream

Here you set the sample rate (44.1, 48 or 96 khz) and the bit resolution (16 bit or 24 bit) of the encoded file. These should be set to match the sample Rate and bit resolution of the source material. If no value matches that of your source material, use the closest highest available value. E.g. if you're using 20 bit source material, set the bit resolution to 24 bit rather than 16 bit.

Encoding Scheme

These settings are used for defining the desired output from the encoder, e.g. whether it should be a stereo file or a 5.1 surround file.

Make settings appropriate for the intended use of the file. If the file will be downloaded or streamed on the Internet, you might not want too high bit rates for example. See below for descriptions of the options.

- Mode

The WMA Pro encoder can use either a constant bit rate or a variable bit rate for encoding to 5.1 surround, or it can use lossless encoding for encoding to stereo. The options on this menu are as follows:

Mode	Description
Constant Bitrate (CBR)	This will encode to a 5.1 surround file with a constant bit rate (set in the Bit Rate/Channels menu, see below). Constant bit rate is preferably used if you want to limit the size of the final file. The size of a file encoded with constant bit rate is always the bit rate times the duration of the file.
Variable Bitrate with Quality	Encodes to a 5.1 surround file with a variable bit rate, according to a quality scale (the desired quality is set in the Bit Rate/Channels menu, see below). When you encode with variable bit rates, the bit rate fluctuates depending on the character and intricacy of the material being encoded. The more complex passages in the source material, the higher the bit rate – and the larger the final file – will be.
Unconstrained VBR (Average)	Encodes to a 5.1 surround file with an unconstrained variable bit rate. Unconstrained means that there will be no limitation to the bit rate used for encoding certain complex passages in the source material. You can however set a recommended average bit rate to somewhat help constrain the size of the final file in the Bit Rate/Channels menu.
Constrained VBR (Maximum)	Encodes to a 5.1 surround file with a constrained variable bit rate. This means that even though the bit rate fluctuates, it will never be allowed to exceed the maximum value you set in the Bit Rate/Channels menu.
Lossless	Encodes to a stereo file with lossless compression.

- Note that if you encode to a surround file, it can only be played as intended on computers using Windows XP, since no other Windows version supports WMA surround. With other operating systems than XP, the surround file will instead be reproduced as a stereo file.

- **Bit Rate/Channels**

This menu allows you to set the desired bit rate – from 128 kbps to 768 kbps, depending on the selected Mode (see above). If the Mode “Variable Bitrate with Quality” is used (see above), the menu allows you to select from six levels of desired quality, with 10 being the lowest and 100 the highest. Generally, the higher the bitrate or quality you select, the larger the final file will be. The menu also shows the channel format (5.1 or stereo).

- **Method**

Lets you choose between “One Pass” and “Two Pass”.

- One pass means that the source material is passed through the encoder just once, and analyzed as well as encoded during the process.
- Two pass, on the other hand, means that the source material is passed through the encoder twice. During the first pass, the material is analyzed, and the actual encoding is applied during the second pass.

Two pass encoding can result in a file of better quality, but the process takes longer.

Dynamic Range Control

These controls allow you to define the dynamic range of the encoded file. The dynamic range is the difference in dB between the average loudness and the peak audio level (the loudest sounds) of the audio. These settings affect how the audio is reproduced if the file is played on a Windows XP computer with a player in the Windows Media 9 series, and the user activates the special “Quiet Mode” feature of the player to control the dynamic range.

The dynamic range is automatically calculated during the encoding process, but you can specify it manually as well.

If you want to manually specify the dynamic range, first put a check-mark in the box to the left by clicking in it and then enter the desired dB values in the Peak and Average fields. You can enter any value between 0 and -90 dB. Note however that it is usually *not* recommended to change the Average value, since it affects the overall volume level of the audio and therefore can affect the audio quality adversely.

The Quiet Mode in a Windows Media 9 player can be set to one of three settings. Below, these settings are listed together with an explanation of how the Dynamic Range settings affect them:

- Off: If Quiet Mode is off, the dynamic range settings that were automatically calculated during the encoding will be used.
- Little Difference: If this is selected and you have *not* manually changed the dynamic range settings, the peak level will be limited to 6 dB above the average level during playback. If you *have* manually specified the dynamic range, the peak level will be limited to the mean value between the peak- and average values you specified.
- Medium Difference: If this is selected and you have *not* manually changed the dynamic range settings, the peak level will be limited to 12 dB above the average level. If you *have* changed the dynamic range, the peak level will be limited to the peak value you specified.

Surround Reduction Coefficients

Here you can specify which amount of volume reduction, if any, should be applied to the different channels in a surround encoding. These settings affect how the audio is reproduced on a system incapable of playing back the file in surround, in which case the surround channels of the file will be combined into two channels and played back in stereo instead.

The default values will normally produce satisfactory results, but you can change the values manually if you wish. You can enter any value between 0 and -144 dB for the surround channels, the center channel, the left and right channels and the LFE channel respectively.

Output Media Description

In these fields you can enter a number of text strings with information about the file – title, author, copyright information and a description of its contents. This information will then be embedded in the file header and can be displayed by some Windows Media Audio playback applications.

- For more information about surround sound and encoding, please refer to the chapter “[Surround sound](#)”.

27

Synchronization

Background

What is synchronization?

Synchronization is said to exist when you make two pieces of equipment agree on time or tempo. You can establish synchronization between Nuendo and a number of other types of devices, including tape recorders and video decks, but also MIDI devices that “play back”, such as other sequencers, drum machines, “workstation sequencers” etc.

When you set up a synchronization system you must decide which unit is the *master*. All other devices are then *slaved* to this unit, which means they will adjust their playback speed to the master’s.

Nuendo as a slave

When a synchronization signal is coming in to Nuendo, from another device (such as a tape recorder, video recorder etc.), this device is the master and Nuendo is the slave. Nuendo will adjust its playback to the other device.

Nuendo as a master

When you set up Nuendo to transmit synchronization information to other devices, Nuendo is the master and the other devices are the slaves; they will adjust their playback to Nuendo.

Nuendo – both master and slave

Nuendo is a very capable synchronization device. It can operate as both a master and a slave at the same time. For example, Nuendo might be slaved to a tape recorder transmitting timecode, while at the same time transmitting MIDI Clock to a drum machine, acting as a master for that.

-
- The VST System Link feature (with which you can synchronize separate computers running Nuendo or Cubase SX for example) is described in a separate chapter. See [page 639](#).
-

Timecode, MIDI clock and word clock

Basically there are three types of synchronization signals for audio, timecode, MIDI clock and word clock:

Timecode (SMPTE, EBU, MTC, VITC etc.)

Timecode appears in a number of guises. No matter which “format” it has, it always supplies a “clock on the wall” type of synchronization, that is, a synchronization related to hours, minutes, seconds and two smaller units called “frames” and “subframes”.

- LTC (SMPTE, EBU) is the audio version of timecode. This means that it can be recorded on the audio track of an audio or video recorder.
- VITC is the video format timecode, that is it is stored in the actual video image.
- MTC is the MIDI version of timecode, transmitted in MIDI cables.
- ADAT sync (Alesis) is only used with the ASIO Positioning Protocol, see [page 619](#).
- Sony 9-pin is a standard that uses serial (RS-422) communication. Sony 9-Pin contains timecode as well as machine control messages (see [page 632](#)).

For the ASIO Positioning Protocol, other high precision timecode formats may also be supported.

Format recommendations for timecode – without ASIO Positioning Protocol

- When synchronizing your system to external timecode, via a synchronizer, the most common timecode format is MTC. Contrary to some reports you might have heard, MTC delivers good precision for external sync. This is due to the fact that the operating system can “time stamp” incoming MIDI messages, which increases precision.
- Sony 9-Pin is not recommended for external sync and should only be used when no other option is available. However, you might of course use 9-Pin for machine control, see [page 621](#).

Format recommendations for timecode – with ASIO Positioning Protocol

- LTC and VITC are the formats with the highest precision and are recommended when available.
- MTC is the next best option and probably the most common choice, since few audio hardware solutions have built in LTC or VITC readers. However, LTC and VITC offer even higher precision when available.
- The choice with the least precision is Sony 9-Pin.

MIDI Clock

MIDI Clock is a tempo based type of synchronization signal, that is it is related to the number of “beats per minute”. MIDI Clock signals are suitable for synchronizing two devices that agree on tempo, such as for example Nuendo and a drum machine.

-
- **MIDI Clock is not suitable as a master sync source for an application like Nuendo. Therefore Nuendo will transmit MIDI Clock signals to other devices, but it will not receive MIDI Clock.**
-

Word Clock

Word clock is basically a replacement for the sample rate clock in for example an audio card. Word clock hence runs at the same rate as the sample rate in the audio, 44.1kHz, 48kHz etc.

Word clock does not contain any position information, it is only a “simple” signal for clocking the audio at its sample rate.

Word clock comes in many formats, analog on coaxial cable, digital as part of an S/PDIF, AES/EBU or ADAT audio signal, etc.

Synchronizing the transport vs. synchronizing audio

How timing is handled in a non-synchronized system

Let's first look at the situation where Nuendo is not synchronized to any external source.

Any digital playback system has an internal clock that ultimately affects the playback speed and stability, and PC audio hardware is no exception. This clock is *extremely* stable.

When Nuendo is playing back with no external synchronization, all playback is internally synchronized to the internal digital audio clock, to ensure synchronization between digital audio and MIDI.

Synchronizing Nuendo's playback

Let's assume now that we use external timecode synchronization, with Nuendo. For example, we might synchronize playback to a tape recorder.

Timecode coming from an analog tape recorder will always vary slightly in speed. Different timecode generators and different tape recorders will also supply timecode with slight differences in speed. In addition, the shuttling of tape mechanisms due to overdubs and re-recordings can cause the physical tape to wear and stretch, which affects the speed of the timecode.

If you set up Nuendo to sync to incoming timecode, it will vary its overall playback speed to compensate for such fluctuations in the speed of the timecode – that's the whole purpose of synchronization.

What happens with the digital audio?

The fact that Nuendo's playback is synchronized to the timecode does not affect the playback of the digital audio. It still relies on the perfectly stable, built-in clock in the audio hardware.

As you may understand by now, problems will appear when the perfectly stable digital audio gets related to the slightly varying speed of a system synchronized to timecode.

The playback timing of each event will *not* be in total accordance with the tape or the MIDI playback, since the playback speed of the audio is determined by the digital audio hardware's built-in clock.

Resolving to word clock

The solution to this problem is to use one external clock for all components in the system. One master clock is used to derive whatever type of clock signal each component in the system needs. For example, something called a house clock can be used to generate sample rate clocks for the digital audio hardware and timecode for Nuendo. This ensures all components in the system use the same reference source for their timing.

Synchronizing digital audio to external clocks running at sample rate is often called “resolving” or “synchronizing to word clock”.

If you aim to perform synchronization to external signals, we strongly recommend that you obtain proper synchronization equipment. This encompasses:

- An audio card that can be slaved to external word clock.
- A synchronizer that can read timecode (and possibly house clock) and generate the required sync signals from that, such as the Steinberg TimeLock Pro. or...
- An audio system with complete built-in synchronization possibilities, preferably supporting the ASIO Positioning Protocol.

Using timecode without word clock

Of course, it is possible to set up a synchronization system where you lock Nuendo to timecode without using word clock. However, please note that the timing of audio vs. MIDI cannot be guaranteed and that fluctuations in speed in the incoming timecode will not affect the playback of audio events. This means that synchronizing to timecode may work in the following situations:

- When the timecode was originally generated by the audio card itself.
- When the source providing the timecode is extremely stable (such as a digital video system, a digital tape recorder or another computer).
- When you remain synchronized to that same stable source throughout the entire process, both while recording and playing back audio.

About the ASIO Positioning Protocol (APP)

-
- ASIO Positioning Protocol requires audio hardware with specific ASIO drivers. As of this writing, APP is not available for audio hardware with non-ASIO drivers under Mac OS X.
-

The ASIO Positioning Protocol is a technology that expands on the type of sync described above and makes *sample accurate positioning* possible.

When transferring audio digitally between devices, it is important that synchronization using word clock and timecode is *completely* correlated. If not, the audio will not be recorded at the exact intended (sample accurate) position, which can cause various types of problems, such as inaccurately positioned audio material, clicks and pops etc.

A typical situation is when transferring material from a digital multi-track tape recorder to Nuendo (for editing) and then back again. If you do not have sample accurate synchronization set up, you cannot be sure that the material will appear in its exact original position, when transferred back to the tape recorder.

In order to take advantage of the ASIO Positioning Protocol, your audio hardware must be suitably equipped and the functionality must be included in the ASIO driver for the hardware.

An example of a system for doing sample accurate transfers, would be transferring audio tracks from an Alesis ADAT to Nuendo. Here the ADAT will be the sync master (though it doesn't necessarily have to be). It provides both the digital audio (with an inherent word clock) and positional information (timecode) via its ADAT sync protocol. The master clock is generated by the ADAT itself.

Hardware and software requirements for APP

- Your computer audio hardware (in our example above this would be an ADAT card in your computer) must support all the functionality required for the ASIO Positioning Protocol. That is, it must be able to read the digital audio and the corresponding positional information from the external device.
- There must be an ASIO 2.0 driver for the audio hardware.
- For resolving to external timecode, the audio hardware must have a timecode reader/writer on-board.

- For information about which audio hardware models currently support APP, see the Steinberg web site (www.steinberg.net).
-
- **The ASIO Positioning Protocol exploits the specific advantage of having an audio card that has a built-in timecode reader. With such a card and the ASIO Positioning Protocol, you can achieve constant sample accurate synchronization between the audio source and Nuendo.**

Machine control

Nuendo can control external tape transports and similar devices via MIDI Machine Control or Sony 9-Pin (more details about each format follow below). This allows you to operate an external tape transport from Nuendo's Transport panel. That is, Nuendo can make the tape recorder locate to a certain position, start, stop, rewind etc.

About sync and machine control

Controlling tape transports is a two-way process:

- Nuendo sends out machine control commands to the tape recorder, asking it to locate to a certain position and activate playback etc.
- The tape recorder locates to the requested position, starts and delivers timecode back to Nuendo, to which Nuendo is synchronized.

Even though it appears as if Nuendo is controlling the tape recorder completely, it is important to remember that in this setup, Nuendo is still being synchronized to the external tape transport, not vice versa.

Also note that the two processes of sync and machine control are completely separated, in terms of protocols used. You can for example synchronize to MTC while sending out transport commands via MMC.

MIDI Machine Control (MMC)

This is a standard MIDI protocol for controlling tape transports. There are a number of tape recorders and hard disk recording systems on the market that support this protocol. Nuendo implements three MMC commands: Start, Stop and Locate.

Sony 9-Pin


This is a standard protocol established by Sony, for controlling audio and video tape transports. It is implemented via regular serial port communication (RS-422). The correct cabling varies between computer platforms and models. Please refer to [page 631](#) to find out more about the correct setup for your computer.

- If your Sony 9-pin device support RS-232 you need a "null modem cable".
- The Sony 9-pin device most likely needs to be switched from local control to remote control, from its front panel. If the device is not set to the correct mode, Nuendo will inform you.
- Normally you should lock Nuendo to timecode from the Sony 9-Pin device, not another source.
- Nuendo implements Start, Stop, Record and Locate commands for 9-Pin devices, along with some special features, described on [page 635](#).

Window Overview

The Synchronization Setup dialog

This dialog box is used for setting up everything that has to do with Nuendo's synchronization to other units. You reach it from the Transport menu.

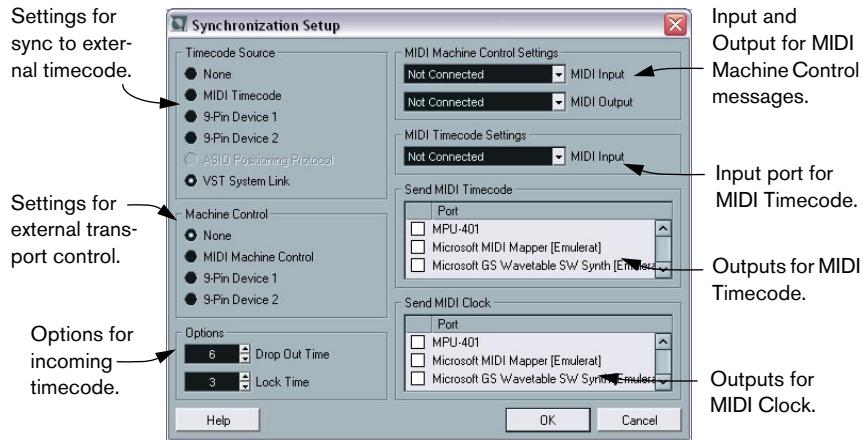

Operations


Making connections and basic settings

- The descriptions below are for a basic setup with a separate synchronizer and audio card. Depending on your exact situation and requirements for communication with external devices, there are endless variations on this theme. Please consult your dealer for more detailed recommendations.

The following connections are required for external sync via a synchronizer, including resolving of the audio card. For details on audio card and synchronizer settings and connections, see the included manuals.

- Route the master clock signal (LTC, VITC, etc.) to an input on the synchronizer.
- Connect the word clock output on the synchronizer to an input on the audio card.
- Connect the MIDI Timecode (MTC) or 9-Pin output on the synchronizer to the corresponding input on the computer.
- Set up the synchronizer and make sure the frame rate settings are in accordance with the master clock.

For more information on frame rates, see [page 637](#).

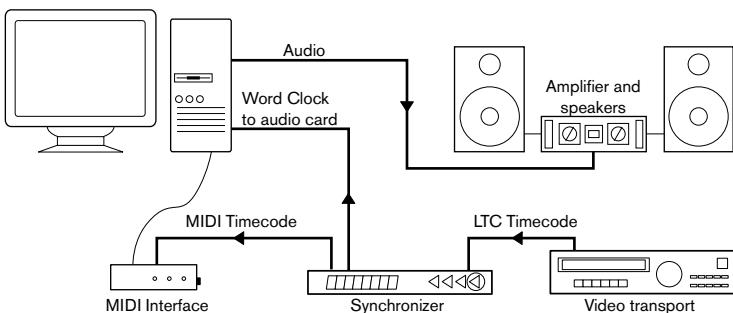


A typical synchronization setup.

Setting up the audio card for external synchronization

1. Open the Device Setup dialog from the Devices menu and select the item VST Multitrack from the list to the left.
2. Click the Control Panel button to open the card's proprietary setup dialog.
If this card is accessed via a special ASIO driver (as opposed to MME or Direct X), this dialog is provided by the card, not by Nuendo. Hence the settings vary with the card brand and model.
3. Adjust the settings as recommended by the card manufacturer, then close the dialog.
The dialog may also contain various diagnostic tools that allow you to verify for example whether word clock is arriving correctly.
4. From the Clock Source pop-up, select the input to which you routed the word clock signal.
This pop-up may not be used if you selected an input in the Control Panel dialog instead.

Setting up Nuendo for external sync to timecode

1. In the Synchronization dialog, set Timecode Source to MIDI Timecode, one of the 9-Pin options or ASIO Positioning Protocol (only if your hardware is ASIO Positioning Protocol compatible).
2. For MIDI Timecode, use the “MIDI Timecode Settings - MIDI Input” pop-up menu to select an input for the timecode.
If you are using the ASIO Positioning Protocol this is not required, since the timecode is then coming in directly via your audio hardware.

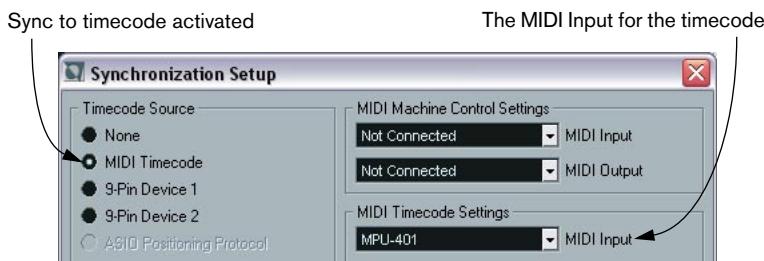


Sync settings for MIDI Timecode.

- For Sony 9-Pin, open the Device Setup dialog, select the desired 9-Pin device from the list, and select a port from the Serial Port pop-up menu.


Sync to 9-Pin activated



Selecting a serial port in the Device Setup dialog.

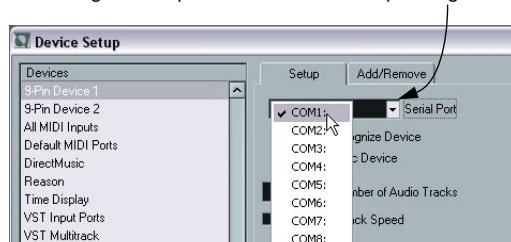

- CLOSE the Synchronization Setup dialog and instead open the Project Setup dialog from the Project menu.
- Use the Start value to set which frame on the external device (e.g. a video tape) should correspond to the beginning of the project.

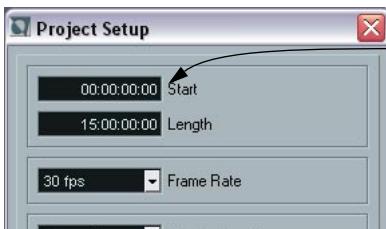

Set this to the timecode position where you want the project to start.

- You can also set this with the function "Set Timecode at Cursor" on the Project menu.

This is useful if you know that a certain position in your project would coincide with a certain timecode position in the external device. Move the project cursor to the desired position, select "Set Timecode at Cursor" and specify the corresponding timecode position in the dialog that appears - the Start value is adjusted accordingly.

- CLOSE the Project Setup dialog.
- On the Transport panel, activate the Sync button (or select Sync Online from the Transport menu).
- Start the tape (or video, or...) that contains the timecode. Nuendo starts playing when it receives timecode with a position "higher" than, or equal to, the project Start frame.

You can wind the device that sends the timecode to any position and start from there.

- When the device with the timecode is stopped, you can use the Nuendo transport controls as you normally do, when it is not synchronized.

You should also look into the Sync Options, see [page 638](#).

The Sync indicator

On the Transport panel you can check the status of incoming timecode by observing the sync indicator. It switches between “Offline” (not waiting for sync), “Idle” (ready for sync but no signal is coming in), and “Lock xx” (where xx is indicating the frame rate of the incoming signal).



Synchronizing other Equipment to Nuendo

You may have other MIDI devices that you want to synchronize to Nuendo. There are two types of synchronization that Nuendo can transmit: MIDI Clock and MIDI Timecode.

Transmitting MIDI Clock

If you transmit MIDI Clock to a device supporting this type of synchronization signal, the other device will follow Nuendo's tempo. The tempo setting in the other device is of no relevance. Instead it plays at the same tempo as Nuendo. If the device also reacts to Song Position Pointers (which Nuendo transmits) it will follow when you wind, rewind and locate using the Nuendo Transport panel.

- **MIDI Clock transport commands include “Start”, “Stop” and “Continue”.** However, some MIDI equipment (e.g. some drum machines) do not recognize the “Continue” command. If this is the case with your equipment, activate the option “Always Use MIDI Clock Start” in the Preferences (Transport page).

When this is activated, only the Start command is used.

Transmitting MIDI Timecode


If you transmit MIDI Timecode to a device supporting this type of synchronization signal, the device will synchronize time-wise to Nuendo, that is, the time displays on Nuendo's Transport panel and on the other device will agree. When you wind and locate Nuendo and then activate playback, the other device will follow from the same position (if it has this capability and is set up for it!).

Setting Up

1. Connect the desired MIDI Outputs from Nuendo to the device(s) that you plan to synchronize.
2. Open the Synchronization Setup dialog from the Transport menu.
3. Activate the sync outputs by using the corresponding checkboxes in the lower right part of the dialog.

You can output any combination of MIDI Timecode and MIDI Clock to any combination of outputs (however, you probably don't want to send MTC and MIDI Clock to the same output).

- Some MIDI Interfaces will automatically send MIDI Clock to all MIDI outputs, regardless of the MIDI Clock Port selection you make in Nuendo. If this is the case, you should only select one MIDI Clock Port (consult the documentation of the MIDI Interface if in doubt).**

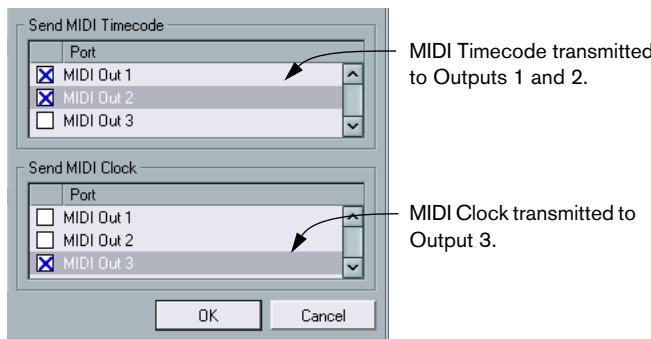


4. Set the other device(s) to their “external synchronization” mode (or some other mode with a similar name) and activate playback on them if necessary.
5. Activate playback in Nuendo, and the other device(s) will follow.

Machine Control

Machine Control commands can be sent using one of two different protocols: MIDI Machine Control (MMC) or Sony 9-Pin. The setup procedures are slightly different for the two formats:

MIDI Machine Control

1. Set up and test basic timecode synchronization, as described earlier in this chapter.
2. Connect a MIDI Out on your MIDI interface to MIDI In on the tape recorder (or similar device).
If you have not already done so (when setting up for MIDI Timecode), also connect a MIDI cable from the MIDI Output on the tape recorder to a MIDI In on the computer.
3. Make sure you have timecode recorded on the tape recorder, and that it is set up to utilize MMC.
4. Open the Synchronization Setup dialog on the Transport menu in Nuendo.
5. Select MIDI Machine Control from the Machine Control section of the dialog.
6. Select the correct MIDI In- and Outputs from the MIDI Machine Control Settings pop-ups.

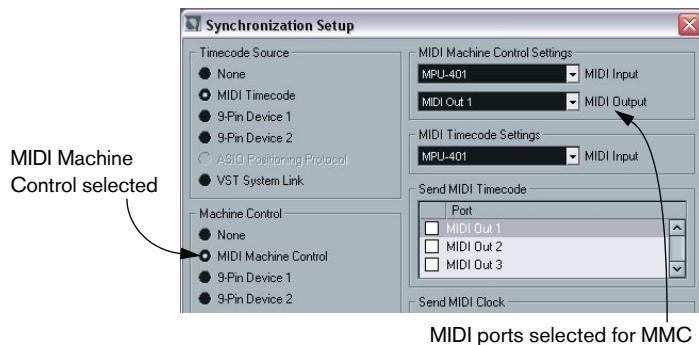

- 7.** Open the Preferences dialog from the File menu (on the Mac, this is located on the Nuendo menu), select the MIDI Filter section and make sure Sysex is activated in the Thru section.

This is necessary since MMC uses two-way communication (the tape recorder "replies" to the MMC messages it receives from Nuendo). By filtering out Sysex Thru, you ensure that these MMC System Exclusive replies are not echoed back to the tape recorder.

- 8.** Close the Preferences and open the Project Setup dialog from the Project menu.
- 9.** As when synchronizing without using transport control, use the Start value to specify which frame on the tape should correspond to the beginning of the project.
- 10.** Close the Project Setup dialog.
- 11.** On the Transport panel, activate the Sync button.
- 12.** Press play on the external tape transport and let the tape roll for a few seconds, so that Nuendo can "learn" about the timecode positions on the tape. Stop the tape transport.
- 13.** Now activate play from Nuendo.

The external tape transport should wind the tape to a position just before the project cursor in Nuendo and go into Play. After a short while, Nuendo should start, in sync.

Try to Stop, Fast Forward and Rewind from Nuendo and activate Play from different positions in the project. The tape transport should follow.

-
- Each time you start up your external tape transport, you may have to activate play from its front panel for a couple of seconds. If you don't, Nuendo has no chance of "knowing" where to wind the first time, since it doesn't know what timecode is recorded on the tape.**
-

Whenever you want to turn off the synchronization between the tape recorder and Nuendo, simply deactivate Sync on the Transport panel.

Connecting a Sony 9-pin compatible device

On Windows computers

The serial port (9-pin D-SUB connector) of your computer is used to establish communication with your Sony 9-pin compatible device (VTR, DAT, Multitracker etc.). However, PCs provide an RS-232 signal at the serial port, not the RS-422 signal expected by Sony 9-pin devices. External RS-232 to RS-422 converters are available from various manufacturers at your local dealer or can be purchased via the internet. If you are planning to cover distances exceeding a few meters please make sure that this adapter also balances the signal.

On Macintosh computers

The serial port of your computer is used to establish communication with your Sony 9-pin compatible device. On older Macintosh computers the required RS-422 signal is present at the two serial ports of the Mac: "Printer" and "Modem". You will need a cable adapter to convert between the 8-pin Mini DIN connector on your Macintosh computer and the 9-pin D-SUB connector found on your Sony 9-pin device. Newer Macintosh computers do not provide serial ports, but you can install extra serial ports on these Macintosh computers using one of the following methods.

- **Stealth Serial Port:**

This is a very common device used to provide a serial port on Macintosh computers lacking this kind of connectivity. This card can be bought in Macintosh stores or via the internet. It is inserted in the modem slot inside your Macintosh and is recognized by the operating system as a serial port. The signal present at the 9-pin D-SUB connector is already RS-422 but you need to adapt between the 8-pin Mini DIN connector of the Stealth Card and the 9-pin D-SUB connector found on your Sony 9-pin device using an appropriate cable.

- **USB to serial adapter:**


These USB devices are used to provide a serial port on Macintosh computers lacking this kind of connectivity. Such devices are available from various manufacturers at your local dealer or can be purchased via the internet. Make sure to install the driver of the device properly so the operating system can register the device as a serial port.

Depending on the kind of product you are using, the electrical signal available at the 9-pin D-SUB connector of the adapter can be either RS-422 or RS-232. Refer to the technical specification of the adapter used to find out more. If an RS-232 signal is used, you must convert this to the RS-422 signal expected by your Sony 9-pin device. External RS-232 to RS-422 converters are available from various manufacturers at your local dealer or can be purchased via the internet. If you are planning to cover distances exceeding a few meters please make sure that this adapter also balances the signal.

Setting up Sony 9-Pin

1. Set up and test basic timecode synchronization, as described earlier in this chapter.
2. Connect an unused serial port (COM port) on the computer to the external tape transport.

As mentioned earlier, you may need a RS232 to RS422 converter or conversion cable.

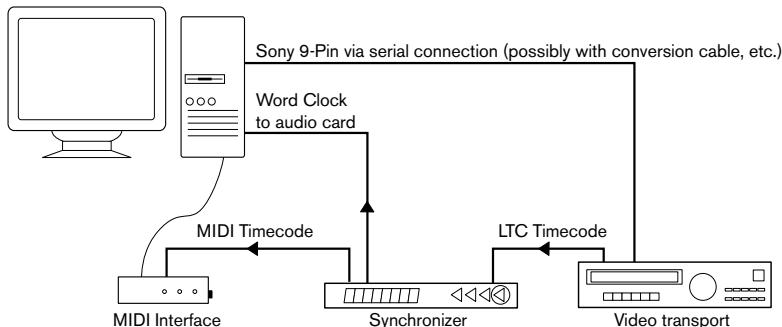

A typical Sony 9-Pin setup.

- Note that you can have two separate 9-Pin devices connected to the computer when using Nuendo!
- 3. Make sure you have timecode recorded on the tape recorder, and that it is set up to utilize Sony 9-Pin.

4. Open the Device Setup dialog from the Devices menu, and select “9-Pin Device 1” or “9-Pin Device 2”.



5. Use the Serial Port pop-up menu to select the correct serial (COM) port.

By selecting different ports for the two 9-Pin Devices, you can separate two different external tape recorders, video systems, etc. The other options in this dialog are described on the following pages.

6. Open the Synchronization Setup dialog on the Transport menu.
7. Select “9-Pin Device 1” or “9-Pin Device 2” from the Machine Control section of the dialog and click OK.
Which one to select depends on your connections and the serial port allocation you made in step 5.
8. Open the Project Setup dialog from the Project menu.
9. As when synchronizing without using transport control, use the Start value to specify which frame on the tape should correspond to the beginning of the project.

10. Close the Project Setup dialog.

11. Pull down the Devices menu and select “9-Pin Device 1” or “9-Pin Device 2”.

The corresponding 9-Pin Device control panel appears. This has a separate set of transport buttons, for controlling the transport in the 9-pin device. There's also a separate Online button, above the transport controls.



It's now possible to control the transport of the 9-pin device independently or together with Nuendo:

- If you activate the Online button on the 9-Pin Device control panel you can use the transport buttons on the panel to control the transport in the device.
- If you activate the Sync button on Nuendo's Transport panel, the 9-Pin Device transport buttons (or the buttons on the main Transport panel) will control the 9-pin device and Nuendo in sync.
- **However, each time you start up your external tape transport, you may have to activate play from its front panel for a couple of seconds.**
If you don't, Nuendo has no chance of "knowing" where to wind the first time, since it doesn't know what timecode is recorded on the tape. Proceed as follows:

12. On the Transport panel, activate the Sync button.
13. Press play on the external tape transport and let the tape roll for a few seconds, so that Nuendo can "learn" about the timecode positions on the tape. Stop the tape transport.
14. Activate the Online button on the 9-Pin Device panel.
15. Now activate play, either from the 9-Pin Device panel or from the Transport panel.
The external tape transport should wind the tape to a position just before the project cursor in Nuendo and go into Play. After a short while, Nuendo should start, in sync.
16. Try to Stop, Fast Forward and Rewind from Nuendo and activate Play from different positions in the project.
The tape transport should follow.
 - When using Sony 9-Pin it is possible to advance the external transport frame by frame by using the Nudge Position buttons on the Transport panel.
 - Whenever you want to turn off the synchronization between the tape recorder and Nuendo, simply deactivate Sync on the Transport panel.

Audio Layback for 9-Pin Devices

Nuendo has some special features for working with 9-Pin devices (typically video decks). These allow you to transfer audio to the 9-Pin device by recording it from Nuendo, manually or automatically. A typical application would be audio layback – if you have edited audio for a video in Nuendo and want to transfer the audio back to the audio track(s) in the video deck, at the correct positions.

-
- This assumes that Machine Control of the 9-Pin device has been set up, and that the proper audio connections have been made for recording audio from Nuendo to the 9-Pin device.**
-

1. Open the Device Setup dialog and select the 9-Pin device (1 or 2) in the Device list.
2. Make sure the Number of Audio Tracks value is correct.
This should be set to the number of audio tracks in the 9-Pin device. The maximum number of audio tracks supported is 48.
 - If you have activated the “Try to Recognize Device” option and the 9-Pin Device model is known to Nuendo, the Number of Audio Tracks is automatically set to the correct value.
3. Close the Device Setup dialog.
4. Select “9-Pin Device 1” (or 2, depending on your connections and setup) from the Devices menu.
The control panel for the 9-Pin Device appears.



The numbered buttons to the left correspond to the set number of audio tracks.

5. Make sure the Online button is activated.
6. To Record Enable an audio track in the 9-Pin device, click the corresponding numbered button in the panel.
The button lights up, indicating that the corresponding audio track is Record Enabled.

7. Set the locators in Nuendo to encompass the audio section you want to transfer.
8. Click the AutoEdit button in the 9-Pin device panel.
This is the button to the right of the transport controls.
 - If the AutoEdit function is supported by the 9-Pin device, the device will automatically go to a position just before the left locator, start playback, activate recording at the left locator and punch out at the right locator.
The audio section will be played back in Nuendo and recorded on the audio tracks of the 9-Pin device.
 - If the AutoEdit function is not supported by the 9-Pin device, you have to activate recording “manually”.
Use the 9-Pin device control panel transport (or the main Transport panel) to rewind to a position before the left locator, activate automatic punch-in and punch-out and start playback. Since no Nuendo tracks are record enabled, recording will only be performed by the 9-Pin device.

-
- Please consult the documentation for the 9-Pin device for information about whether the AutoEdit function is supported or not.
-

About the “Control Playback Speed” option

In the Device Setup dialog you will find an option called “Control Playback Speed” (on the Setup tab when one of the 9-Pin devices is selected). If this is activated, Nuendo will attempt to adjust the playback speed of the 9-pin device so that it stays in sync with Nuendo.

-
- This function should only be used in a situation when Nuendo cannot be synchronized to timecode from the 9-Pin device.
-

Options

Making Project Settings

About Frame Rates

The frame rate is the number of frames per second in a film or on a video tape. Just as there is always sixty seconds to a minute, there is always a certain number of frames to each second. However, the frame rate used varies with the type of media (film or video), which country the video tape has been produced in, and other circumstances.

In the Project Setup dialog are two settings for frame rates:

- The Frame Rate pop-up is automatically adjusted to the frame rate of the incoming timecode.

There is an exception to this when you are synchronizing Nuendo to MIDI Timecode: If you have selected 29.97 fps or 30 dfps as Frame Rate in Nuendo, this selection will be kept, since these frame rates are not included in the MTC format.

The Project Setup dialog contains six frame rates to choose from:

Frame Rate Description

24 fps	The traditional frame rate of 35mm film.
25 fps	The frame rate used for all video and audio in Europe (EBU).
29.97 fps	Straight 29.97 frames per second.
30 fps	Straight 30 frames per second. This is often used in the United States for audio only work.
29.97 dfps	"Drop frame" code running at 29.97 frames per second, most often used in the United States of America for work with color video.
30 dfps	Very rarely used.

- The Display Format pop-up contains a number of formats that when selected work as the "master" setting for the display format used in the various windows' rulers and position displays.

The item "60 fps (user)" on this menu represents a user definable frame rate. To make editing with frame accuracy correspond to the actual frame rate in an external sync source, you need to set this frame rate to the same value as the Frame Rate pop-up.

Proceed as follows:

1. Open the Preferences dialog (accessed from the File menu under Windows or the Nuendo menu on the Mac) and select the Transport page.
2. At the bottom of the page, enter the desired frame rate under “User Definable Framerate”.
Either type the desired value directly or use the arrow buttons to increase/decrease the value. You can enter any value between 2-200.



3. When you're done, click OK to close the dialog and save the settings.

The Frame Rate you specified will now be the one used when you select “60 fps (user)” in the Display Format pop-up.

Sync Options

The following options are available in the Synchronization Setup dialog:

Drop Out Time

On an analog tape with timecode, dropouts may occur. If a drop-out is very long, Nuendo may (temporarily) stop. In the Dropout Time field you can set how long a drop-out (in frames) should be tolerated until Nuendo decides that the tape isn't good enough to synchronize to. If you have a very stable timecode source, you may lower this number to make Nuendo stop more swiftly after the tape recorder has been stopped.

Lock Time

Using this field you can set how many frames of “correct” timecode Nuendo should receive before attempting to “lock” (synchronize) to incoming timecode. If you have an external tape transport with a very short start-up time, you could try lowering this number to make lock-up even faster than it already is.

28

VST System Link

Introduction

VST System Link is a network system for digital audio that allows you to have several computers working together in one large system. Unlike conventional networks it does not require Ethernet cards, hubs, or CAT-5 cables; instead it uses the kind of digital audio hardware and cables you probably already possess in your studio.

VST System Link has been designed to be simple to set up and operate, yet give enormous flexibility and performance gains in use. It is capable of linking computers in a “ring” network (the System Link signal is passed from one machine to the next, and eventually returns to the first machine). VST System Link can send its networking signal over any type of digital audio cable, including S/PDIF, ADAT, TDIF, or AES, as long as each computer in the system is equipped with a suitable ASIO compatible audio interface.

So, why would you want to link up two or more computers? Well, the added computer power gives you vast possibilities:

- Dedicate one computer to running VST instruments while recording audio tracks on another.
- If you need lots of audio tracks, you may simply add tracks on another computer.
- You could have one computer serve as a “virtual effect rack”, running CPU-intensive send effect plug-ins only.
- Since you can use VST System Link to connect different VST System Link applications on different platforms, you can take advantage of effect plug-ins and VST instruments that are specific to certain programs or platforms.

This chapter describes how to set up and use VST System Link in Nuendo.

Preparations

Requirements

The following equipment is required for VST System Link operation:

- Two or more computers.
These can be of the same type or use different operating systems – it doesn't matter. For example, you can link an Intel-based PC to an Apple Macintosh without problems.
- Each computer must have audio hardware with specific ASIO drivers, installed and working.
- The audio hardware must have digital inputs and outputs.
Of course, to be able to connect the computers the digital connections must be compatible (i.e. the same digital formats and connection types must be available).
- At least one digital audio cable for each computer in the network.
- A VST System Link host application installed on each computer.
As of this writing, VST System Link is implemented for Nuendo (version 1.6 or later), Cubase SX/SL and Cubase 5.2s (System Link version). Any VST System Link applications can connect to each other.

Additionally, we recommend that you use a KVM switchbox:

Using a KVM switchbox

If you want to set up a multi-computer network, or even a small network in a limited space, it's a good idea to invest in a KVM (Keyboard, Video, Mouse) switchbox. With one of these switchers you can use the same keyboard, monitor, and mouse to control each computer in the system, and switch between computers very rapidly. KVM switchers are not too expensive, and very easy to setup and operate. If you decide not to go this route, the network will function just the same, but you may end up doing a lot of jumping from one machine to the other while setting up!

Making connections

Below, we will assume that you are connecting two computers.

Should you have more than two computers, it's still best to start with two and add the others one by one once the system is working – this makes troubleshooting easier if you run into problems. For two computers, you will need two digital audio cables, one in each direction:

1. Connect a digital audio cable from the digital output of Computer 1 to the digital input of Computer 2.
 2. Connect the other cable from the digital output of Computer 2 into the digital input of Computer 1.
- If a card has more than one set of inputs and outputs, choose whichever one that suits you – for simplicity usually the first set is best.

Setting up clock sync

Before you proceed you need to make sure that the clock signals on your ASIO cards are synchronized correctly. This is essential when cabling any kind of digital audio system, not just VST System Link.

-
- All digital audio cables by definition always carry a clock signal as well as audio signals, so you don't need to use a special Word Clock input and output for this (although you may find that you get a slightly more stable audio system if you do, especially when using multiple computers).
-

The Clock Mode or Sync Mode is set up in the audio hardware's ASIO control panel. In Nuendo, you proceed as follows:

1. Pull down the Devices menu and open the Device Setup dialog.
2. Select the VST Multitrack device and make sure the Setup tab is selected to the right.
3. Click the Control Panel button.
The ASIO control panel appears.
4. Open the ASIO control panel on the other computer as well.
If you are using another VST System Link host application on that computer, check its documentation for details on how to open the ASIO control panel.

- Now, you need to make sure that one audio card (and only one!) is set to be the Clock Master, and all the other cards must be set to listen for the clock signal coming from the Clock Master i.e. they must be Clock Slaves.

The naming and procedure for this differs depending on the audio hardware – consult its documentation if required. If you are using Steinberg Nuendo ASIO hardware, all cards default to the “AutoSync” setting – in this case you must set one of the cards (and only one) to “Master” in the Clock Mode section of the control panel.

- Typically, the ASIO control panel for an audio card contains some indication of whether the card receives a proper sync signal or not, and the sample rate of that signal.

This is a good indication that you have connected the cards and set up clock sync properly. Check your audio hardware’s documentation for details.

-
- It's very important that one and only one card is the clock master, otherwise the network cannot function correctly. Once you have set this up, all the other cards in the network will take their clock signal from this card automatically.**
-

The only exception to this procedure is if you are using an external clock – which could be from a digital mixing desk or special Word Clock synchronizer for example. If so, you must then leave all your ASIO cards in Clock Slave or AutoSync mode, and make sure that each of them is listening for the signal coming from the synchronizer, usually passed through your ADAT cables or Word Clock connectors in a daisy chain fashion.

Minimizing the latency

The general definition of latency is the amount of time it takes any system to respond to whatever messages are sent to it. For example, if your system's latency is high and you play VST instruments in real time, you will get a noticeable delay between when you press a key and when you hear the sound of the VST instrument. Nowadays, most ASIO-compatible audio cards are capable of operating with very low latencies. Also, all VST applications are designed to compensate for latency during playback, making the playback timing tight.

However, the latency time of a VST System Link network is the total latency of all the ASIO cards in the system added together. Therefore it's extra important to minimize the latency times for each computer in the network.

- **The latency does *not* affect the synchronization – it's always perfectly in time. But, it can affect the time it takes to send and receive MIDI and audio signals, or make the system seem sluggish.**

To adjust the latency of a system, you typically adjust the size of the buffers in the ASIO control panel – the lower the buffer size, the lower the latency. Generally speaking it's best to keep to fairly low latencies (buffer sizes) if your system can handle it – about 12 ms or less is usually a good idea.

Setting up your software

Now it's time to set up your programs. The procedures below describe how to set things up in Nuendo; if you are using another program on the other computer, please refer to its documentation.

Setting the sample rate

The projects in both programs must be set to use the same sample rate. Select "Project Setup..." from the Project menu and make sure the sample rate is the same in both systems.

Streaming digital audio between applications

1. Create input and output busses in both applications and route these to the digital inputs and outputs.

The number and configuration of the busses depends on your audio hardware and on your needs. If you have a system with eight digital i/o channels (such as an ADAT connection), you could create several stereo or mono busses or a surround bus together with a stereo bus, or any combination you need. The important thing is that you should have the same configuration in both applications – if you have four stereo output busses on Computer 1, you want four stereo input busses on Computer 2, etc.

2. Set things up so that Computer 1 plays back some audio.

You could for example import an audio file and play this back in Cycle mode.

3. In the mixer, make sure the playing audio channel is routed to one of the digital output busses you have set up.

4. In Computer 2, open the mixer and locate the corresponding digital input bus.

The audio being played back should now "appear" in the program running on Computer 2. You should see the input bus level meters moving.

5. Reverse this procedure so that Computer 2 plays back and Computer 1 "listens".

Now you have verified that the digital connection works as it should.

- From this point on in this chapter, we refer to the busses connected to the digital inputs and outputs as "VST System Link busses".


Activating VST System Link

After setting up the inputs and outputs, you now need to define which input/output should carry the actual VST System Link information.

The System Link networking signal is carried on only one bit of one channel. This means that if you have an ADAT based system which normally carries eight channels of 24-bit audio, once you activate VST System Link you will have seven channels of 24-bit audio and one channel of 23-bit audio (the least significant bit of this last channel is what we will use for networking). In practice this makes no discernible difference to the audio quality, since you will still have around 138dB headroom on this channel.

To set things up we need to open the VST System Link panel:

1. Open the Device Setup dialog on the Devices menu.
2. Select the VST System Link device and make sure the Setup tab is selected to the right.

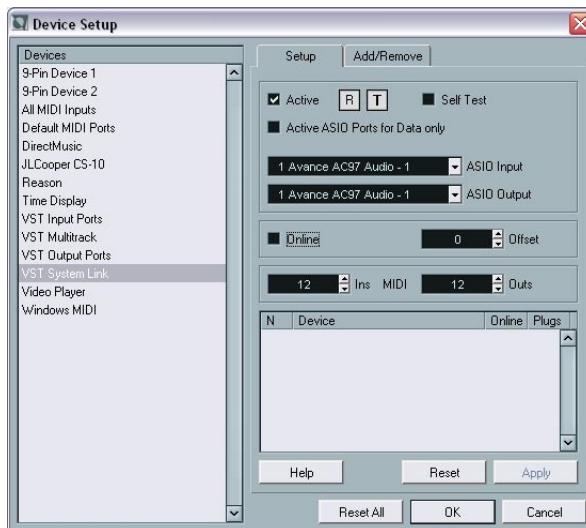

3. Use the ASIO Input and ASIO Output pop-up menus to define which channel should be the networking channel (and thus become a 23-bit audio channel, in our example).
Quite often you will be able to just leave these pop-ups the way they are.
4. Click the Active checkbox at the top of the panel.
5. Repeat the steps above for every computer on the network.

As the computers are made active, you should see the small T (Transmit) and R (Receive) lights flashing on each active computer, and the name of each computer should appear in the list at the bottom of the pane. Each computer is assigned a random number – don't worry about this, it's just so the network knows internally which one is which.

- You can double click on the name in bold (which is the name of the computer you're currently working on) and set it to whatever other name you wish.
This name will appear in the System Link window of every computer on the network.
- **If you don't see the name of each computer appearing once you have made it active, you may have to check your settings.**
Go through the procedure above again and make sure that all ASIO cards are listening to the digital clock signals correctly, and that each computer has the correct inputs and outputs assigned to the System Link network.

Putting the network online

After each computer's name you will see whether it is online or not. When a computer is online, it will receive transport and timecode signals, and its sequencer application can be started and stopped by remote control. If it is off-line it can only be started from its own keyboard – it is effectively an independent machine, although it is still on the network.

- **Note that any computer can control any and all of the others – VST System Link is a peer to peer network and there is no absolute “master” computer.**
However, most users do like to think of one machine as the master (in a one person/two computer network, this would be the machine you actually sit behind most of the time).

For now, let's put all computers online:

1. Activate the Online checkbox in the VST System Link panel for all computers.



2. Check that the system is working by pressing Play on one computer – all computers should start almost instantly and play perfectly in time, with sample accurate precision.

- The Offset setting to the right allows you to adjust whether one machine will play back slightly ahead or behind the rest.

This is normally not needed, but occasionally with some hardware you may find that the lock is a few samples out. In that case you can adjust the lock with the Offset value. For now, leave it set to 0 – it will most likely be what you want.


VST System Link sends and understands all transport commands, so you can play, stop, fast forward, rewind etc. the entire network from one computer without a problem – try it! If you jump to a locator point on one machine, all other machines will also instantly jump to that locator point.

-
- **Don't forget to make sure that all computers have their tempos set to the same value, otherwise your synchronization will be seriously skewed.**

Using MIDI

As well as supplying transport and sync control, VST System Link also supplies up to 16 MIDI ports, each with 16 channels. You set this up as follows:

1. Use the MIDI Ins and Outs value boxes to specify the number of MIDI ports you need.
The default value is 0 MIDI In and 0 MIDI Out ports.
2. Create a MIDI track in the Project window and open the Inspector (top section).
3. If you now pull down the “in” or “out” pop-ups, you will find the specified System Link ports added to the list of MIDI Inputs and Outputs.

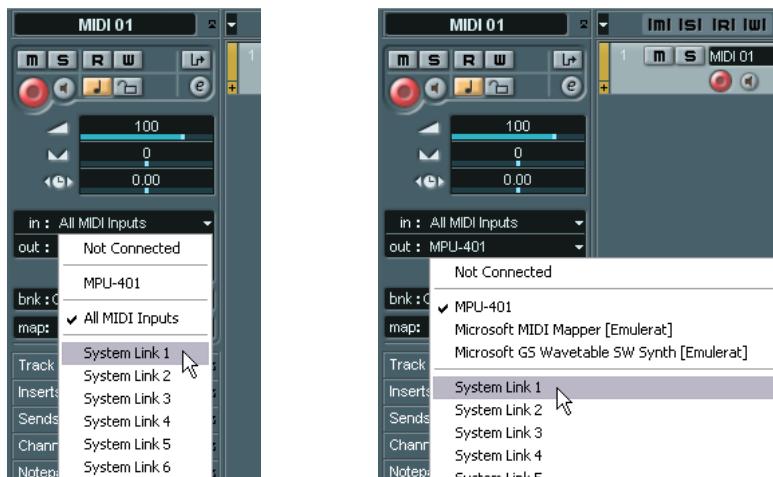

This allows you to route MIDI tracks to VST instruments running on another computer, as described in the application examples (see [page 653](#)).

The “Active ASIO Ports for Data only” setting

If you are sending huge amounts of MIDI data at once, there is a small possibility that you might run out of bandwidth on your VST System Link network. This will manifest itself by notes “choking” or timing becoming erratic.

If this happens, you can devote more bandwidth to MIDI by selecting Active ASIO Ports for Data only in the VST System Link Setup panel. When this is active, the VST System Link information will be sent on the entire channel instead of just one bit, more than enough for all the MIDI you could ever hope to use. The downside is that you can no longer use this ASIO channel for audio transfer (do not connect it to a speaker!), thus leaving you only 7 channels of audio in our ADAT cable example. Depending on how you work this might be a reasonable compromise.

Hearing the network audio

If you are using an external mixing desk, hearing your audio really isn't an issue – just plug the outputs of each computer into the desired channels on the external mixing desk, press Play on one of the computers, and you're good to go.

However, many people prefer to mix internally inside the computer and just use a desk for monitoring (or maybe not use any external mixer at all). In this case you'll need to select one computer to be your “main mix computer” and send the audio from your other computers into this.

In the following example, we assume you are using two computers, with Computer 1 as your main mix computer and Computer 2 running two additional stereo audio tracks, an FX channel track with a reverb plug-in and a VST instrument plug-in with stereo outputs.

1. First you want to set things up so that you can listen to the audio playback from Computer 1.
In other words, you need an unused set of outputs, e.g. an analog stereo output, connected to your monitoring equipment.
2. Go to Computer 2 and route each of the two audio tracks to a separate output bus.
These should be busses connected to the digital outputs – let's call them Bus 1 and 2.
3. Route the FX channel track to another VST System Link bus (Bus 3).

4. Route the VST instrument channel to yet another bus (Bus 4).
5. Go back to Computer 1 and check the corresponding four VST System Link input busses.
If you start playback on Computer 2, the audio should “appear” on the input busses on Computer 1. However, to mix these audio sources you need actual mixer channels:
 6. Add four new stereo audio tracks on Computer 1 and route these to the output bus you use for listening, e.g. to the analog stereo outputs.
 7. For each of the audio tracks, select one of the four input busses.
Now, each Computer 2 bus is routed to a separate audio channel on Computer 1.
 8. Activate monitoring for the four tracks.

If you now start playback, the audio from Computer 2 will be sent “live” to the new tracks on Computer 1, allowing you to hear them together with any tracks you play back on Computer 1.

Adding more tracks

OK, but if you have more audio tracks than you have VST System Link busses (physical outputs)? Then you just use the Computer 2 mixer as a submixer: Route several audio channels to the same output bus and adjust the output bus level if needed.

Note also that if your audio cards have multiple sets of input and output connections you can link up e.g. multiple ADAT cables and send audio via any of the busses on any of the cables.

Internal mixing and latency

One problem with mixing inside the computer is the latency issue we mentioned earlier. The VST engine always compensates for record latencies, but if you are monitoring through Computer 1 you will hear a processing delay while you listen to signals coming from your other computers (*not* on your recording!). If your audio card in Computer 1 supports ASIO Direct Monitoring you should definitely turn this on – you’ll find the setting in the VST Multitrack Device Setup panel (see [page 51](#)). Most modern ASIO cards support this function. If yours doesn’t you may want to change the Offset value in the VST System Link Setup panel to compensate for any latency issues.

Setting up a larger network

This is not much more difficult than a two computer network. The main thing to remember is that VST System Link is a daisy chain system. In other words, the output of Computer 1 goes to the input of Computer 2, the output of Computer 2 goes to the input of Computer 3, and so on around the chain. The output of the last computer in the chain must always go back into the input of Computer 1, to complete the ring.

Once you've done this, the transmission of all the transport, sync, and MIDI information to the whole network is handled pretty much automatically. However, where you may run into confusion in a large network is in the transmission of audio signals back to a central mix computer.

If you have lots of hardware inputs and outputs on your ASIO cards you don't need to send audio via the chain at all, but can transmit it directly to the master mix computer via one or more of its other hardware Inputs. For example, if you have a Nuendo Digiset interface or 9652 card on Computer 1 you could use ADAT cable 1 for networking, ADAT cable 2 as a direct audio input from Computer 2, and ADAT cable 3 as a direct audio input from Computer 3.

You can also transmit audio via the ring system if you don't have enough hardware I/Os for direct audio transmission. For example, in a four computer scenario you could send audio from Computer 2 into a channel in the mixer in Computer 3, and from there to a channel in the mixer in Computer 4, and from there back to the master mixer in Computer 1. This can certainly be tricky to set up, so generally it is recommended that if you want to set up a complex network, you should make sure to use ASIO cards with at least three separate digital I/Os.

Application examples

Using one computer for VST instruments

In this example, you are using one computer as your main record and playback machine, and want to use another computer as a virtual synth rack.

1. Record a MIDI track into Computer 1.
2. Once you have finished recording, route the MIDI output of that track to System Link MIDI port 1.
3. Now go to Computer 2, open up the VST Instrument rack and assign an instrument to the first slot in the rack.
4. Route the VST Instrument channel to the desired output bus.
If you are using Computer 1 as your main mixing computer, this would be one of the VST System Link output busses, connected to Computer 1.
5. Create a new MIDI track in the Project window of Computer 2, and assign the MIDI output of the track to the VST Instrument you created.
6. Assign the MIDI input of the track to be VST System Link port 1.
Now, the MIDI track on Computer 1 is routed to the MIDI track on Computer 2, which in turn is routed to the VST Instrument.
7. Now activate monitoring for the MIDI track on Computer 2, so that it will listen and respond to any MIDI commands coming in.
In Nuendo, you would click the monitor button in the Track list or Inspector.
8. Press play on Computer 1.
It will now send the MIDI information on the track to the VST Instrument loaded on Computer 2.

Even with a slow computer you should be able to stack a whole bunch of extra VST Instruments this way, expanding your sound palette considerably. Don't forget that VST System Link MIDI is also sample accurate, and thus has *much* tighter timing than any hardware MIDI interface ever invented!

Creating a virtual effect rack

The effect sends for an audio channel in Nuendo can either be routed to an FX channel track or to any activated Group or output bus. This allows you to use a separate computer as a “virtual effect rack”, by setting things up in the following way:

1. Go to Computer 2 (the machine you will use as effect rack) and add a new stereo audio track.
You cannot use an FX channel track in this case, since the track must have an audio input.
2. Add the desired effect as an insert effect for the track.
Let's say you add a high-quality reverb plug-in.
3. Open the mixer and select one of the VST System Link busses as input for the audio track.
You want to use a separate System Link bus, which will only be used for this purpose.
4. Route the channel to the desired output bus.
If you are using Computer 1 as your main mixing computer, this would be one of the VST System Link output busses, connected to Computer 1.
5. Activate monitoring for the track.
6. Now, go back to Computer 1 and select a track to which you want to add some reverb.
7. Bring up the effect sends for the track, in the Inspector or the mixer.
8. Pull down the send routing pop-up menu for one of the sends, and select the VST System Link bus assigned to the reverb in step 3.
9. Use the send slider to adjust the amount of effect as usual.

The signal will be sent to the track on Computer 2 and processed through its insert effect, without using any processor power on Computer 1.

You can repeat the steps above to add more effects to the “virtual effect rack”. The number of effects available this way is only limited by the number of ports used in the VST System Link connection (and of course by the performance of Computer 2, but given that it won't have to handle any recording or playback, you should be able to use quite a lot of effects).

Getting extra audio tracks

All computers on a VST System Link network are locked with sample accuracy. Therefore, if you find that the hard drive on one computer isn't fast enough to run as many audio tracks as you need, you could record new tracks on one of the other computers instead. This would create a "virtual RAID system", with several disks all operating together. All tracks will remain locked together just as tightly as if they were all running on the same machine. This means that you effectively have an unlimited track count! Need another 100 tracks? Just add another computer.

29

Video

Background

Video support in Nuendo

Nuendo plays back video films in AVI, Quicktime or MPEG formats. Under Windows, video playback can be done using one of three playback engines: Video for Windows, DirectShow or Quicktime. This ensures compatibility with as wide a range of video files as possible. Under Mac OS X, Quicktime is always used as playback engine. QuickTime supports the following video file formats: AVI/MPEG/QuickTime/DV.

Generally there are two ways to play back video:


- Without any special hardware at all, using the computer CPU.
In this case, the “codec” is in software. While this will be fine in many situations it does put a limit on the size of the video window as well as the quality of the image.
- Using video hardware that for example connects to an external monitor.
Mac OS X: Using a FireWire port, you can play back video on an external monitor using a DV-to-analog converter or a DV camera.
This is valid for DV video and QuickTime is used for playback.

-
- **Hardware solutions for playing back a video on an external monitor and further information can be found on www.steinberg.net.**
-

Operations

About the video playback engine

In Nuendo for Windows, you select a playback engine in the Device Setup dialog, under the “Setup” tab for the Video Player device:

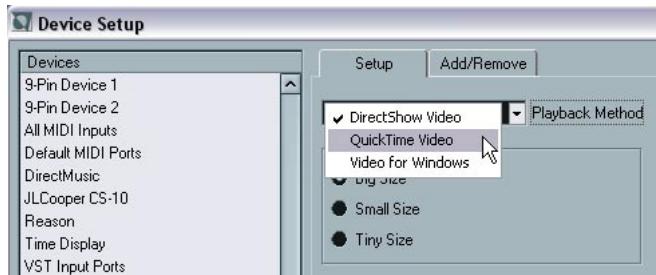

What playback engine to select depends largely on which type of video system you are using, as well as on the file format and codec of the video files you want to work with. Below is a brief guide to which formats you may be able to use with the different playback engines. However, this also depends on the video hardware – please consult the hardware documentation for detailed information.

Playback engine	Video file formats	Codecs
DirectShow	AVI, MPEG	Cinepak, DV, Indeo, M-JPEG, MPEG
QuickTime	QuickTime, AVI, MPEG	Cinepak, DV, Indeo, M-JPEG, MPEG
Video for Windows	AVI	Cinepak, Indeo, M-JPEG (with some video cards)

- Make sure to read the section “Before you start” on [page 664](#).

- **Generally, you can expect most Windows hardware to work with DirectShow.**
On a Windows system, the DirectShow and Video for Windows players are provided by the operating system, you don't have to install any additional software.
 - **For the Quicktime playback method to be available, you must have QuickTime installed on your computer.**
There is a freeware version (a QuickTime installer is included on the Nuendo CD if required, or you can download it from www.quicktime.com) and a "pro" version, which offers additional video cutting options. The player engine is the same in both versions, so for mere playback in Nuendo there is no need to purchase the "pro" version.
-
- **Under Mac OS X, there is only one standard player option. The Quicktime playback engine is always used, supporting the formats AVI, MPEG, QuickTime and DV. If your system has a FireWire port, there is also a FireWire option – see below.**

Importing a video file

Video files are imported just as audio files, see [page 111](#).

- By using the File menu (Import Video File).
- By using drag and drop.
- By importing to the Pool first and then dragging to the Project window (see the Pool chapter for details).

Note:

- To be able to play back the video, you must add a video track (by using the Add Track submenu on the Project menu or Quick menu). You can only have one video track in each project.
- All video files on the track must be of the same size and compression format.
- The Import dialog has an option for extracting the audio from a video file – see [page 662](#).

Playing back a video file

Video files are displayed as events/clips on the video track, with thumbnails representing the frames in the film.



A video event on a video track.

To view the video on the computer screen (as opposed to on an external monitor, see below), proceed as follows:

- If you're running MacOS X, first open the Device Setup dialog from the Devices menu, click Video Player in the list and make sure "On-screen Window" is selected in the Video Output section of the dialog.
- Pull down the Devices menu and select Video (or use a key command – by default [F8]).

A video window appears. In Stop mode, this displays the video frame at the project cursor position.

Playback is done together with all other material, using the Transport panel.

Setting the Window size

If you are playing back video in a window on your computer screen, you may want to adjust the size:

- Open Device Setup dialog from the Devices menu, click Video Player in the list and use the Video Window buttons to select a size.

Playing back video in full screen mode

When viewing video on the computer screen you can choose to let the video occupy the whole screen, during playback or in Stop mode:

- Right-click (Win) or [Ctrl]-click (Mac) in the video window to switch to full screen. Click again to exit full screen.

Playing back a video file on external equipment (Mac OS X only)

For Apple computers equipped with a FireWire port, you can easily connect external video hardware via this, as OS X has built-in video support for the most common formats (NTSC/PAL/DVCPRO). FireWire is capable of high data-transfer speed and is the most common standard for communicating with video-related peripheral equipment.

- To play back a video file via hardware connected to the FireWire port, select “FireWire” in the Outputs pop-up of the Device Setup–Video Player dialog.

When FireWire is selected as output, a number of format options appear on the Format pop-up, allowing you to select between various video formats and resolutions.

Extracting audio from a video file

If a video file contains audio, it can be extracted. Regardless of the audio format in the actual file, the resulting audio file will always be in the format (Sample Rate and Record Format) that is specified for the Project in the Project Setup dialog.

There are three ways to extract audio from a video file:

- By checking the Extract audio option in the Import Video dialog.
This will add the audio to the currently active audio track. The new audio event will start at the same time as the video event, so that they are in sync with each other.
- By using Import Audio from Video File from the File menu.
This is just as above, but no video clip is created, only an audio event (starting at the project cursor position on the selected track).
- By using Extract Audio from Video File on the Pool menu.
This creates an audio clip in the Pool, but doesn't add any events to the Project window.
- **These functions are not available for mpeg video files.**

Replacing the audio in a video file

Nuendo has a special function for replacing the audio in a video file:

1. Pull down the File menu and select Replace Audio in Video File.
 2. In the file dialog that appears, locate and select the video file on your hard disk, and click Open.
A new file dialog appears.
 3. Locate and select the audio file that you want to insert into the video file, and click Open.
The audio is added to the video file, replacing its current audio track (if any).
- By combining the functions Extract Audio, Export Audio Mixdown and Replace Audio in Video File, you can create a complete audio track for a video file.

Project window and Browser editing operations

Video clips are played back by events just as audio clips are. You can use all the basic editing operation on video events, just as with audio events (see [page 116](#)). The following operations are not possible on the video track:

- Drawing, Gluing, Muting and Scrubbing.
- The video track has no editor and does not make use of parts.

Pool operations

For more about operations on video clips in the Pool, see [page 428](#).

Before you start

When working on a project involving a video file, there are several points to bear in mind:

Have you selected the right player?

The player is used not only for playback of the video file, but also to provide file information in the Pool and in the Import Video dialog. Therefore, to make sure that you have chosen the right player for a particular type of video file, check the file information displayed in the Import Video dialog or the Pool prior to trying to import or playing back the file.

When this information reads “0x0 pixel”, “0.000 s” and “0 Frames”, the video file is either corrupt, or the format is not supported by the codecs available to the selected video player. You will either have to change the video player, or install the required codec.

-
- Trying to import or play back a file not supported by the selected video player leads to unpredictable results – if no information on the number of frames, the length and the pixel resolution is available in the Import Video dialog or the Pool, you cannot import/play this file properly with this particular video player.**

 - You can change the video player in the Device Setup dialog. After having done so, make sure to remove any previously imported video file from the Pool first, and re-import it.**
-

Editing a video file

Nuendo allows you to cut, copy, paste and trim video events, i.e. your video track may contain more than one video event. However, when using the DirectShow video player on a Windows system, you may find that only the first event on the video track is played back correctly. In such a case make sure that the video track contains no more than one video event.

When working with a Windows operating system, you may find that you are unable to edit a video file copied from a CD. This is because files copied from CD are write protected by default. Right-click the file, and uncheck the “Read only” option in the File Properties dialog.

When you have a video file in a format not supported by Nuendo, use an external application to convert the file to a format that Nuendo can import.

Graphics cards

There are some graphics cards that provide more than one output. You can use such cards for display of the video on an extra TV or computer monitor in full screen mode. Check the card's documentation for information on how it handles video output and how to set it up for multi-monitor display.

Dedicated video cards are currently not supported by Nuendo.

Options

In the Preferences dialog (Event Display–Video page), there are two options for video playback:

- Show Video Thumbnails.

When this is activated, thumbnail frames of the video contents are shown in the track.

- Video Cache Size.

This determines how much memory is available for video thumbnails. If you have long video clips and/or work with a large zoom factor (so that a lot of frames are shown in the thumbnails), you may have to raise this value.

The Edit Mode

Video playback follows the Nuendo transport, so that the video frame at the current project cursor position is shown, during playback and in Stop mode (e.g. if you move the project cursor manually or use fast forward/rewind). Nuendo has a special Edit Mode that makes use of this fact, allowing you to edit audio while getting continuous visual feedback on the video display:

- If you activate “Edit Mode” on the Transport menu, the project cursor will automatically follow when you make selections or perform editing operations (such as moving, resizing, adjusting fades, etc.). Since the video automatically follows the project cursor, you will instantly get a visual feedback when you edit! This makes it very easy to e.g. move an audio event to a certain spot in the video.
- To avoid obscuring the view, the project cursor will be hidden from the event display in Stop mode if Edit Mode is selected.
However, it will still be shown in the Ruler.

Application Examples

Listed below are three examples of how you can use Nuendo’s Edit Mode for matching audio and MIDI to video.

1. If required, set the snap point in the audio event so that it identifies a significant point in the audio recording.
This would be the position in the audio that you want to match to a certain position in the video. If you don’t set the snap point, the start of the audio event will be used instead.
2. Activate Edit Mode on the Transport menu.
3. Select the audio event.
The project cursor position is automatically moved to the position of the snap point.
4. While watching the video display, move the audio event towards the correct position.

Since the project cursor automatically follows the snap point position and the video automatically follows the project cursor, you just need to move the event until the desired video frame is displayed!

If you have a video section and an audio event for it, that doesn't quite fit, you can use time stretch to change the length of the audio:

1. Use the method described above to position the start of the audio event at the correct position according to the video.
2. In Edit Mode, select the Range Selection tool and double click in the audio event.

This creates a selection range that spans the whole audio event.

3. Click the right edge of the selection range and drag to adjust it to the desired length.

While you are dragging, the project cursor position follows the right edge of the range, allowing you to pinpoint the desired end position in the video.

4. Use "Locators to Selection" (on the Transport menu) to set the locators to the selection range you just made.
5. With the Arrow tool, select the audio clip to be stretched.
6. Select Time Stretch from the Process submenu on the Audio menu.
7. Click the Set To Locators Range button.

The time stretch factor is set up so that the audio event will fit the locator range.

Make sure you don't exceed the 75% to 125% limit!

8. Make Accuracy and Algorithm settings as desired, and click Process. The audio is stretched or compressed to fit the range.

If you want the audio to fade in, reaching full volume at a certain position in the video, and fade out at another position, here is a quick way of achieving this:

This assumes that the audio event is already positioned and sized correctly according to the video.


1. In Edit Mode, select the Range Selection tool.
2. Make a selection range in the audio event, roughly covering the section that should be played at full volume.

3. Click and drag the edges of the selection range so that they exactly correspond to the end of the fade-in and the start of the fade-out, respectively.

While you are dragging, the project cursor position follows the edge of the range, allowing you to pinpoint the desired fade-in and fade-out position in the video.

4. Pull down the Audio menu and select “Adjust Fades to Range”.

The fade-in and fade-out handles of the audio events are automatically adjusted.

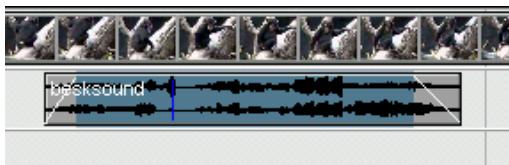

30

ReWire

Introduction

ReWire and ReWire2 are special protocols for streaming audio between two computer applications. Developed by Propellerhead Software and Steinberg, ReWire provides the following possibilities and features:

- Real-time streaming of up to 64 separate audio channels (256 with ReWire2), at full bandwidth, from the “synthesizer application” into the “mixer application”.
In this case, the “mixer application” is of course Nuendo. An example of a “synthesizer application” is Propellerhead Software’s Reason.
- Automatic, sample accurate synchronization between the audio in the two programs.
- The possibility to have the two programs share one sound card and take advantage of multiple outputs on that card.
- Linked transport controls that allow you to play, rewind etc, either from Nuendo or from the synthesizer application (provided it has some kind of transport functionality).
- Automatic audio mixing functions of separate channels as required.
In the case of Reason for example, this allows you to have separate mixer channels for the different devices.
- Additionally, ReWire2 offers the possibility to route MIDI tracks in Nuendo to the other application, for full MIDI control.
For each ReWire2 compatible device, a number of extra MIDI outputs will be made available in Nuendo. In the case of Reason, this allows you to route different MIDI tracks in Nuendo to different devices in Reason, having Nuendo serve as main MIDI sequencer.
- Less total system requirements than when using the programs together in the conventional way.

Launching and quitting

When using ReWire, the order in which you launch and quit the two programs is very important:

Launching for normal use with ReWire

1. First launch Nuendo.
2. Enable one or several ReWire channels in the ReWire Device dialog for the other application.
This is described in detail on [page 672](#).
3. Launch the other application.
It may take slightly longer for the application to start when you are using ReWire.

Quitting a ReWire session

When you are finished, you also need to quit the applications in a special order:

1. First quit the synthesizer application.
2. Then quit Nuendo.

Launching both programs without using ReWire

We don't know exactly why you would want to run Nuendo and the synthesizer application at the same time on the same computer, without using ReWire, but you can:

1. First launch the synthesizer application.
2. Then launch Nuendo.

Please also note that the two programs now compete for system resources such as audio cards, just as when running either with other, non-ReWire audio applications.

Activating ReWire channels

ReWire supports streaming of up to 64 separate audio channels, while ReWire2 supports 256 channels. The exact number of available ReWire channels depends on the synthesizer application. Using the ReWire Device panels in Nuendo, you can specify which of the available channels you want to use:

1. Pull down the Devices menu and select the menu item with the name of the ReWire application. All recognized ReWire compatible applications will be available on the menu.

The ReWire panel appears. This consists of a number of rows, one for each available ReWire channel.



The ReWire panel for Reason.

2. Click on the power buttons to the left to activate/deactivate the desired channels.

The buttons light up to indicate activated channels. Please note that the more ReWire channels you activate, the more processing power is required.

- For information about exactly what signal is carried on each channel, see the documentation of the synthesizer application.
3. If desired, double click on the labels in the right column, and type in another name.

These labels will be used in the Nuendo mixer to identify the ReWire channels.

Using the transport and tempo controls

-
- This is only relevant if the synthesizer application has some sort of built-in sequencer or similar.
-

Basic transport controls

When you run ReWire, the transports in the two programs are completely linked. It doesn't matter in which program you Play, Stop, Fast Forward or Rewind. However, recording (if applicable) is still completely separate in the two applications.

Loop settings

If there is a loop or cycle facility in the synthesizer application, that loop will be completely linked to the Cycle in Nuendo. This means that you can move the start and end point for the loop or turn the loop on or off in either program, and this will be reflected in the other.

Tempo settings

As far as tempo goes, Nuendo is always the Master. This means that both programs will run in the tempo set in Nuendo.

However, if you are not using the Tempo track in Nuendo, you can adjust the tempo in either program, and this will immediately be reflected in the other.

-
- If you are using the Tempo track in Nuendo (if the Tempo button is activated on the Transport panel), you should not adjust the tempo in the synthesizer application, since a tempo request from ReWire will automatically deactivate the Tempo switch in Nuendo!
-

How the ReWire channels are handled in Nuendo


When you activate ReWire channels in the ReWire Device panels, they will become available as channel strips in the mixer. The ReWire channel strips have the following properties:

- ReWire channels appear to the right of the other audio and MIDI channel strips in the mixer.
ReWire channel strips are denoted by a yellow label in the mixer.
- ReWire channels may be any combination of mono and stereo, depending on the synthesizer application.
- ReWire channels have the same functionality as regular audio channels. This means you can set volume and pan, add EQ, insert effects and sends and route the channel outputs to groups or busses. All settings can be automated using the Read/Write functions. However, ReWire channels have no monitor buttons.
- You can mix down the audio from ReWire channels to a file on your hard disk with the Export Audio Mixdown function (see [page 597](#)). You can either export the output bus to which you have routed the ReWire channels, or export individual ReWire channels directly – “rendering” each ReWire channel to a separate audio file.

Routing MIDI via ReWire2

- This feature is only available with ReWire2-compatible applications.

When using Nuendo with a ReWire2-compatible application, additional MIDI outputs will automatically appear on the MIDI Output pop-up menus for MIDI tracks. This allows you to play the synthesizer application via MIDI from Nuendo, using it as one or several separate MIDI sound sources.

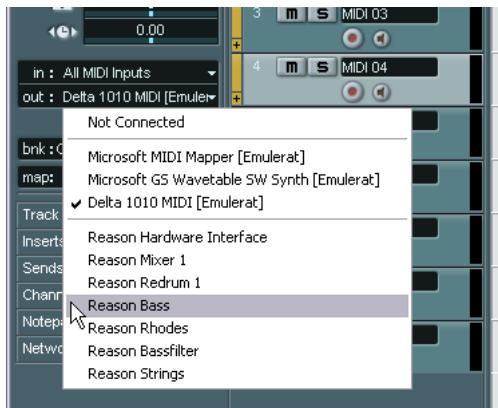

The MIDI outputs for a Reason song. Here, each output goes directly to a device in the Reason rack.

- The number and configuration of MIDI Outputs depends on the synthesizer application.

Considerations and limitations

Sample rates

Synthesizer applications may be limited to audio playback in certain sample rates. If Nuendo is set to a sample rate other than those, the synthesizer application will play back at the wrong pitch. Consult the documentation of the synthesizer application for details.

ASIO drivers

ReWire works well with ASIO drivers. By using the Nuendo bussing system you can route sounds from the synthesizer application to various outputs on an ASIO compatible audio card.

31

File handling

File Operations

New Project

The New Project command on the File menu allows you to create a new project, either empty or based on a template:

1. Select New Project from the File menu.

A list of templates is displayed. When you install Nuendo, a number of templates for various purposes are included, but you can also create your own (see [page 682](#)).

2. Select a template from the list, or select “Empty”.

A file dialog appears, allowing you to specify a folder for the new project.

3. Select an existing project folder or create a new one by typing its name in the dialog.

A new, untitled project is created.

Open

The Open command on the File menu is used for opening saved project files. Both Nuendo project files (extension “.npr”) and project files created in Steinberg’s Cubase SX (extension “.cpr”) can be opened (although Cubase-specific settings will be ignored).

- Several projects can be open at the same time.

The active project is indicated by the blue Activate button in the upper left corner of the Project window. To make another project active, click its Activate button.



An active project.

- You can also open project files by selecting a shortcut from the “Recent Projects” submenu on the File menu.

This submenu lists the projects you have recently worked with, with the most recent one at the top of the list.

- Projects can also automatically be opened when you launch Nuendo. See [page 703](#).

About the “Pending Connections” dialogs

If you open a Nuendo project created on another setup (other audio hardware), the program tries to find matching audio inputs and outputs for the i/o busses (this is one of the reasons why you should use descriptive, generic names for your input and output ports – see [page 16](#)).

If the program cannot resolve all audio inputs and outputs used in the project, a Pending Connections dialog will appear. This will allow you to manually re-route any ports specified in the project to ports available in your system.

Similarly, a Pending Connections dialog will appear if you open a project with MIDI ports that don't match the current MIDI setup.

Again, use the dialog to re-route ports.

Close

The Close command on the File menu closes the active window. If a Project window is active, selecting Close will close the corresponding project.

- If the project contains unsaved changes, you will be asked whether you want to save the project before closing it.
If you select “Don't Save”, and have recorded or created new audio files since saving, you get the choice to delete or keep these.

Save and Save As

The commands Save and Save As allow you to save the active project as a project file (file extension “.npr”). The Save command stores the project under its current name and location, while Save As allows you to rename and/or relocate the file. If you haven't yet saved the project, or if it hasn't been changed since it was last saved, only Save As will be available.

-
- Generally, we recommend that you save project files in their project folders, to keep the projects as manageable as possible.
-

A word about file extensions

Under Windows, file types are indicated by three letter file name extensions (such as *.npr for Nuendo project files). Under Mac OS X, it is not necessary to use file name extensions, since the file types are stored internally in the files. However, if you want your Nuendo projects to be compatible with both platforms, you should make sure the option “Use File Extension in File Dialog” is activated in the Preferences dialog – this is the default setting. When this is activated, the proper file name extension is automatically added when you save a file.

Saving a Default project

If you always want the same default project to open when you launch Nuendo, you can save a default project:


1. Set up a project the way you want it.
2. Select “Save As” from the File menu and save the project in the User/Application Data/Steinberg/Nuendo folder, under the name “default.npr”.

This is the one case when the file name extension is crucial under Mac OS X as well!

3. Open the Preferences dialog and select the General page.
4. Open the “On Startup” pop-up menu and select “Open Default Project”.

The next time you launch Nuendo, the default project is automatically opened. For details on the other Startup options, see [page 703](#).

Save Project to New Folder

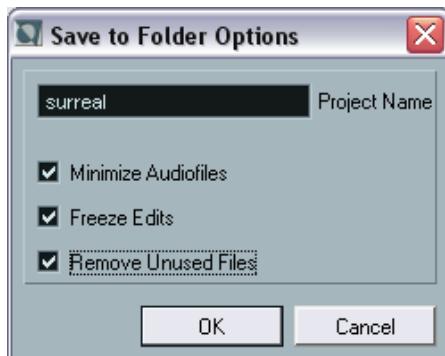

This function is very useful if you want to move or archive your project. If you select this item, you will first be asked where to store the saved project. Then a dialog will appear, with the following options:

Item	Description
Project Name	By default, this will be the current name of the project you're saving, but you can change it if you like.
Minimize Audiofiles	If this is activated, only the audio file portions that are actually used in the project will be included. This can significantly reduce the size of the project folder (if you are using small sections of large files), but it will also mean you cannot make use of the remaining audio file portions if you continue working with the project in its new folder.
Freeze Edits	This will perform a Freeze Edits operation, making all processing and applied effects permanent to each clip in the Pool. See page 359 .
Remove Unused Files	When this is activated, only files in the Pool that are actually used in the project will be stored in the new folder.

When you've made your settings, click OK to save the project in the new folder. The original project isn't removed or affected.

Save as Template

This function allows you to save the current project as a template. Templates are always stored in the Templates folder (within the Nuendo program folder). When you create a new project, the available templates will be listed, allowing you to base the new project on a template.

- Templates can contain clips and events, just like regular projects. If this is not what you want, make sure to remove all clips from the Pool before you save the project as a template.

Revert

If you select Revert from the File menu, you will be asked whether you really want to revert to the last saved version of the project. If you click "Revert", all changes you have made since saving will be discarded.

- If you have recorded or created new audio files since saving, you will be asked whether you want to delete or keep these.

Working with Libraries

A Nuendo Library is a stand-alone Pool, that is not associated with a project file. You can use Libraries to store sound effects, loops, Video Clips, etc., and transfer media from a Library into a project by using drag and drop. The following library functions are available on the File menu:

New Library

Creates a new library. Just as when creating new projects, you will be asked to specify a project folder for the new library (in which media files will be stored). The Library will appear as a separate Pool window in Nuendo.

Open Library

Opens a file dialog for opening a saved library file.

Save Library

Opens a file dialog for saving the library file (file extension ".npl").

The “Cleanup” function

The Cleanup function on the File menu helps you to save hard disk space by locating, and if you like, deleting unused audio files in the project folders on your disk.

1. Select “Cleanup...” from the File menu.

If there are any open projects, an alert will appear, allowing you to close these. Clicking “Close” closes all open projects and brings up the Cleanup dialog.

2. If you want to restrict the Cleanup function to a certain folder only, click the “Search Folder” button and select the folder.

You should only select a specific folder if you are certain it doesn't contain audio files used in other projects (outside the folder)! See the note below.

If you want the Cleanup function to be applied to all folders on all hard disks, you don't need to make any special settings, as this is the default mode. After selecting a folder you can reset the function to search all folders by opening the “Search Folder” dialog again and clicking “Cancel”.

3. Click the Start button.

Nuendo will now scan the selected folder (or all hard disks) for Nuendo project folders and check for audio and image files (in the Audio, Edits and Images subfolders) that are not used by any project. The found files are listed in the dialog.

4. When the scan is complete, you can select files by clicking in the list. Use [Ctrl]/[Command]-click to select several files, and [Shift]-click to select a range of files. You can also click the Select All button to select all files in the list.

- **There are situations when the Cleanup function will list files that are not unused!**

- If you have moved or renamed files or folders (without updating the project files to use the new paths), there is no way for Nuendo to know that these files are used in a project.
- If you perform the Cleanup function on a folder in which there are audio files belonging to other projects (outside the folder), these files will be considered “unused”.
- Also, make sure you don't delete any files used in other applications, or files that you generally want to keep!

However, you can safely delete Image files since these can be reconstructed by the program if necessary.

5. Delete any files you don't want to keep, by selecting them and clicking Delete.

6. Close the dialog by clicking its close button.

Exporting and importing Nuendo Tracks

You can export Nuendo tracks (of any type) for later import into other Nuendo projects. Everything associated with the tracks will be exported (mixer channel settings, automation subtracks, parts and events etc.) and a separate “media” folder will be created, containing copies of all referenced audio files.

Project specific settings such as tempo are not part of the exported track files.

Exporting Nuendo Tracks

1. Select the tracks that you wish to export.
2. Pull down the File menu and open the Export submenu.
3. On the submenu, select “Selected Tracks...”.
A file dialog appears allowing you to select or create (and name) an empty destination folder for the exported tracks.
4. Click OK.

The tracks will be saved in the specified folder, and will contain two items; a XML file named after the enclosing folder and a subfolder named “Media” which will contain any associated audio or video files.

Importing Nuendo Tracks

- Note that the sample rate used in the project you import tracks to has to match the sample rate in the original project!
If not, audio files will play back at the wrong speed.
1. Pull down the File menu and open the Import submenu.
 2. On the submenu, select “Nuendo Tracks...”.
 3. In the file dialog that appears, locate the XML file, select it and click Open.
The “Copy files to Project Folder?” dialog appears just like when importing audio files.
 4. Click Yes to copy the files into your current project or No to leave them in their current location.

The tracks are imported, complete with all contents and settings.

Exporting and importing AES31 files

The AES31 standard is an open file interchange format, developed by the Audio Engineering Society as a means of overcoming format incompatibility issues between different audio hardware- and software. It can be used for transferring projects via disk or network from one workstation to another, retaining time positions of events, fades, etc.

AES31 uses the widely used Microsoft FAT32 file system with Broadcast Wave as the default audio file format. This means that an AES31 file can be transferred to and used with any digital audio workstation that supports AES31, regardless of the type of hardware and software used, as long as the workstation can read the FAT32 file system and Broadcast Wave files (or regular wave files).

Exporting AES31 files

1. Select “AES31...” from the Export submenu on the File menu.
2. Select a name and location for the new file and click Save.
The exported file will contain all Audio Track data, including audio file references. If any of the audio events in your project has real-time fades (as set up with the fade handles for the events), these will automatically be converted to fade audio files and stored in a fades folder next to the AES31 file.

The following will *not* be included in the resulting AES file:

- Any mixer settings or automation made in Nuendo.
- MIDI Tracks.

The saved file will be an xml file (but with the extension “.adl”, for audio decision list) – this means you can open it in any text editor to check file references etc.

Importing AES31 files

1. Select “AES31...” from the Import submenu on the File menu.
2. Navigate to the location of the AES31 file (extension “.adl”), select it and click Open.
You are now prompted to select or create a project folder for the new project.
3. After specifying the name and location of the project folder, the new project opens containing all the audio tracks and events stored in the AES31 file.

Exporting and importing OMF files

Open Media Framework Interchange (OMFI) is a platform independent file format intended for transfer of digital media between different applications. Nuendo can import and export OMF files (file extension ".omf"), allowing you to use Nuendo in conjunction with other audio and video applications.

Exporting OMF files

1. Pull down the File menu and open the Export submenu.
2. On the submenu, select "OMF...".
The OMF Export Setup dialog appears.
3. Select "1.0 File" or "2.0 File" depending on which OMFI version is supported by the application in which you plan to import the file.
4. Select whether you want to include all audio data in the OMF file ("Export All to One File") or use references only ("Export Media File References").
If you choose "Export All to One File", the OMF file will be totally "self-contained", but possibly very large. If you choose "Export Media File References", the file will be small, but the referenced audio files must be available for the receiving application.
5. If you selected the "2.0 File" option above you can choose whether to include the fades and volume settings for the events (as set up with the event fade and volume handles) – to include these in the OMF file, activate "Export Clip Based Volume".
6. Specify a sample size (resolution) and sample rate for the exported files (or use the current project settings).
7. Click OK, and specify a name and location in the file dialog that appears.

The exported OMF file will contain (or make reference to) all audio files that are played in the project (including fade and edit files). It will not include unused audio files referenced in the Pool, or any MIDI data. Video files are not included, but Nuendo stores the start positions of Video Events in the OMF file, allowing you to manually import video files in the other OMF application (see below).

Importing OMF files

1. Pull down the File menu and open the Import submenu.
2. On the submenu, select “OMF...”.
3. In the file dialog that appears, locate the OMF file and click Open.
A project file dialog appears, allowing you to specify a folder for the new project.
4. Select an existing project folder or create a new one by typing its name in the dialog.
5. If the OMF file contains Video Event information, you are asked whether you want to create Markers at the start position of the Video Events.
This allows you to manually import the video files, using the Markers as position references.

A new, untitled project is created, containing the Audio Events of the imported OMF file.

Importing and exporting OpenTL files

OpenTL is a file exchange format developed for Tascam hard disk recording systems. If you import an OpenTL file to Nuendo, the resulting project will contain all audio files and edits made in the Tascam system, with all events positioned correctly in the Project window. Nuendo supports both Import and Export of the OpenTL format, making it possible to transfer all edits and audio files back and forth between Nuendo and the Tascam device.

About Tascam Devices

Tascam devices can store audio on hard disks using one of two file allocation systems. They either use the FAT32 (Windows standard), or the HFS (MacOS standard) file system. The audio file format also differs between the two file systems, FAT32 will store audio as Wave files, while HFS will store audio as Sound Designer II files.

- OpenTL files can only be transferred within file systems of the same format which means that it is not possible to import an OpenTL project exported from Mac (HFS or FAT32) into a Windows system (FAT or FAT32) or a Tascam device, and vice versa.
- Nuendo for Mac OS X supports OpenTL using HFS/SD II as well as FAT32/Wave.

- Nuendo for Windows supports OpenTL for Tascam products using the Wave/FAT32 systems.

Importing OpenTL Files

1. Select “OpenTL...” from the Import submenu on the File menu.
2. Navigate to the location of the OpenTL file, select it and click Open. You are now prompted to select or create a project folder for the new project.
3. After specifying the name and location of the project folder, the new project opens containing all the audio files stored in the OpenTL file and their associated edits.

Exporting OpenTL Files

Before you export to OpenTL format, you should make the following preparations:

1. Make sure all audio files in the project are in mono and 16 or 24 bit. The OpenTL specification does not include support for 32 bit audio files. In case you are planning to export your project in OpenTL format please work with 16 or 24 bit audio files only since any 32 bit file will not be included in the export process.
2. Make sure all referenced audio files are located on the drive to which you want to export the OpenTL file.

Now you are ready to export:

3. Select “OpenTL...” from the Export submenu on the File menu.
4. Select a name and location for the new file and click Save.

Again, the OpenTL file must be exported to the same drive as the referenced audio files.

The exported file will contain all audio track data, including file references. The following will *not* be included in the resulting OpenTL file:

- Any real-time mixing, EQ and effects settings made in Nuendo.
- Automation Tracks.
- MIDI Tracks.

Importing Premiere Generic EDL Files

You can transfer audio files and their associated edits from the Adobe Premiere application to Nuendo. This is made possible by rendering a "Generic EDL" file from a session in Premiere, and importing the resultant file.

Proceed as follows:

1. Select "Premiere Generic EDL..." from the Import submenu on the File menu.
2. Navigate to the location of the Premiere Generic EDL file, select it and click Open.
You are now prompted to select a name and location for the new project Folder that will be created.
3. After selecting, the new project opens containing all the audio files stored in the Premiere Generic EDL file and their associated edits. Nuendo will also automatically extract any audio from video files if the audio is referenced in the EDL file.

Exporting and Importing MIDI Files

Nuendo can import and export Standard MIDI Files, which makes it possible to transfer MIDI material to and from virtually any MIDI application, on any platform. When you import and export MIDI files, you can also specify whether certain settings associated with the tracks should be included in the files (automation subtracks, volume and pan settings etc.).

Exporting MIDI Files

To export your MIDI tracks as a Standard MIDI File, pull down the File menu and select "MIDI File..." from the Export submenu. A regular file dialog appears, allowing you to specify a location and name for the file.

When you have specified a location and a name for the file, click "Save". At this point, the Export Options dialog appears, allowing you to specify a number of options for the file – what should be included in the file, its type and its resolution (see below for descriptions of the options).



The Export Options dialog.

You will also find these settings in the Preferences dialog (MIDI-MIDI File page). If you set these up once and for all in the Preferences , you only need to click OK in the Export Options dialog to proceed.

The dialog contains the following options:

Option	Description
Export Inspector Patch	If this is checked, the MIDI patch settings in the Inspector – Bank Select and Program Select (used for selecting sounds in the connected MIDI instrument) are included as MIDI Bank Select and Program Change events in the MIDI file.
Export Inspector Volume/Pan	If this is checked, Volume and Pan settings made in the Inspector are included as MIDI Volume and Pan events in the MIDI file.
Export Automation	If this is checked, recorded automation (see page 293) is converted to MIDI controller events and included in the MIDI file. This also includes automation recorded with the MIDI Control plug-in (see the separate “MIDI devices and features” pdf document).
Export Inserts	If this is checked and you are using any MIDI plug-ins as insert effects, the modifications to the original MIDI notes that occur as a result of the effect(s) will be included in the MIDI file. A MIDI delay, for example, will produce a number of repeats to a MIDI note by actually adding additional, “echoing” notes at rhythmic intervals – these notes will be included in the MIDI file if the option is activated.
Export Sends	If this is checked and you are using any MIDI plug-ins as send effects, the modifications to the original MIDI notes that occur as a result of the effect(s) will be included in the MIDI file.
Export Marker	If this is checked, any markers you have added (see page 149) will be included in the MIDI file as Standard MIDI File Marker events.
Export as Type 0	If this is checked, the MIDI file will be of Type 0 (all data on a single track, but on different MIDI channels). If you don't check this option, the MIDI file will be of Type 1 (data on separate tracks). Which type to choose depends on what you want to do with the MIDI file (in which application or sequencer it should be used, etc.).
Export Resolution	You can specify a MIDI resolution between 24 – 960 for the MIDI file. The resolution is the number of pulses, or ticks, per quarter note (PPQ) and determines the precision with which you will be able to view and edit the MIDI data. The higher the resolution, the higher the precision. The resolution should be chosen depending on the application or sequencer with which the MIDI file should be used though, since certain applications and sequencers may not be able to handle certain resolutions.

- **The MIDI File will include the Tempo track.**
- **Inspector settings (other than patch, volume, pan and effects – see above) are not included in the MIDI file!**
To include these, you need to convert the settings to “real” MIDI events and properties by using the Merge MIDI in Loop function for each track, see [page 465](#).

Importing MIDI Files

To import a MIDI file from disk, proceed as follows:

1. Select “MIDI File...” from the Import submenu on the File menu.
2. In the dialog that appears, select whether a new project should be created for the file or not.
If you select “No”, the MIDI file will be imported into the current project.
3. Locate and select the MIDI file in the file dialog that appears, and click Open.
4. If you chose that a new project should be created, you are asked to specify a project folder for the new project.
Select an existing project folder or create a new one by selecting a location for it and typing its name in the dialog.

The MIDI file is imported. The result depends on the contents of the MIDI file and the Import Options settings in the Preferences dialog – MIDI-MIDI File page:

The Import Options are as follows:

Option	Description
Extract First Patch	If this is checked, the first Program Change and Bank Select events for each track are converted to Inspector settings for the track.
Extract First Volume/Pan	If this is checked, the first MIDI Volume and Pan events for each track are converted to Inspector settings for the track.
Import Volume/Pan as Automationtrack	If this is checked, all MIDI Volume and Pan events in the MIDI file will be converted to automation data for the MIDI tracks.
Import to Left Locator	If this is checked, the imported MIDI file will be placed so that it starts at the position of the left locator – otherwise it will start at the beginning of the project. Note that if you choose to have a new project created automatically, the MIDI file will always start at the beginning of the project.

As mentioned on [page 691](#), the result also depends on what type of MIDI file it is – Type 0 or Type 1:

- If the MIDI file is of Type 0 (all data on a single track), only one MIDI track will be created.

This track will be set to MIDI Channel “Any”, allowing all MIDI events to play back on their original channels. You can use the Dissolve Part function on the MIDI menu to distribute the events onto different tracks with different MIDI Channels (see [page 484](#)).

- If the MIDI file is of Type 1 (data on several tracks) a number of new MIDI tracks and parts will be created.

In both cases, the Tempo track is adjusted according to the Tempo track in the MIDI file.

-
- It is also possible to import a MIDI file from disk by dragging and dropping it from the Windows Explorer or the Mac OS Finder into the Nuendo Project window. The Import Options apply if you use this method as well.
-

Importing Cubase VST files

As described on [page 678](#), Nuendo can open Cubase SX/SL projects with the regular Open function. It is also possible to import files created in older versions of Cubase. There are three options for this on the File – Import submenu:

Import Cubase Song

This will open a Song file (Windows file extension “.all”) created in Cubase 5.0 or later and convert it to a Nuendo project. When importing a Song, you will be asked to specify a folder for the new project, as usual.

- **Cubase Songs can contain more than one Arrangement (containing independent part and event data). If this is the case, you will be asked which one of these Arrangements to import.**

To import all Arrangements in a Cubase Song, simply repeat this for all Arrangements, and save each as a separate project.

The conversion has the following limitations:

Data	Conversion result
MIDI output setting for MIDI tracks	If the output information stored in the original Song doesn't match the current outputs, a “Pending Connections” dialog will appear, allowing you to remap each MIDI output in the Song to a new output.
MIDI track play parameters (Inspector settings)	Only the volume and transpose settings are included; the other parameters (velocity, compression, length and pan) are ignored.
MIDI part play parameters (Inspector settings)	All settings are included, except transpose.
Group tracks	Removed.
Style tracks	Removed.
Chord tracks	Removed.
Drum tracks	Converted to MIDI tracks with drum maps. MIDI output settings for individual drum sounds will be ignored.
Solo/Mute status of tracks	Ignored.
MIDI “effect” devices, such as the arpeggiator and IPS	Removed.
Window layouts	Ignored.

Data	Conversion result
Key command settings	Ignored.
Grooves	Ignored.
MIDI Mixermaps	Removed.
Dynamic events in audio parts (including M-points)	Ignored.
Automation	The VST channel automation is included, but limited to volume, pan and EQ data. Plug-in automation and automation for DSP Factory settings are ignored.
Left/right locator positions and cycle status	Ignored.
Sync settings and status	Ignored.
Master track hitpoints	Removed.
VST Group channels	Removed.
Multiple audio tracks routed to the same audio channel	Will be replaced by separate audio tracks (with separate channels in the mixer). This is because in Nuendo there is always one channel per track.
Solo/Mute status of VST channels	Ignored.

- **It's also possible to import Songs created in version 3.7x of Cubase for Windows.**
However, this will only include the basic audio and MIDI data, ignoring most of the settings.

Import Cubase Arrangement

As mentioned above, a Song in previous versions of Cubase could contain one or several Arrangements. These contained all the part and event data along with file references, but without mixer settings and similar, which were global to all Arrangements in the Song. Arrangements could be saved as separate files, with the extension ".arr".

When you import a Cubase Arrangement into Nuendo, it will be converted to a project, just as when importing a Song. The same limitations apply.

Import Cubase Part

Just as in Nuendo, previous Cubase versions used parts as containers for MIDI or audio events. These could be saved as separate files with the extension “.prt”. When you import a part file, the following happens:


- A new track is created, with the name of the part.
That is, the name of the part when it was saved in Cubase, not (necessarily) the file name.
 - The part appears as a Nuendo part, at the left locator position.
 - If the imported part was an audio part, the necessary clips and file references are added to the Pool.
-
- Note that none of these file formats contain any actual audio data. Just as with Nuendo projects, the files only contain references to audio files. This means that you need access to the referenced audio files as well, to properly import Songs, Arrangements or Parts with audio.**

Importing audio CD tracks

You can import audio from audio CDs, for use in Nuendo projects. This is done by selecting “Import Audio CD” from the Pool menu (or by selecting the “Audio CD...” option from the Import submenu on the File menu).

- If the project window is active, the imported audio CD track(s) will be inserted on the selected audio track, at the project cursor position. It is also possible to import audio CD tracks into the Pool, which may be the preferred method if you want to import several CD tracks in one go.

Selecting one of the Import Audio CD menu items brings up the following dialog:

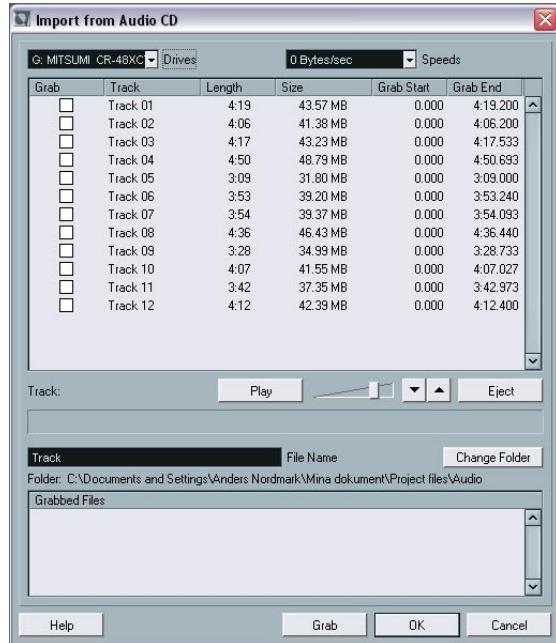

- If you have more than one CD drive, you use the Drives pop-up menu to select the one holding the audio CD.
- The Speeds pop-up menu (Windows version only) lists all possible data transfer speeds for the selected CD drive.

While you normally want to use the fastest possible speed, you may have to select a slower speed for flawless audio extraction.

- The main display in the dialog lists all audio tracks on the CD. The columns have the following functionality:

Column	Description
Grab	Activate the checkbox in this column for the track you want to grab (import). To activate more than one checkbox (import more than one track), click and drag over the checkboxes (or press [Ctrl]/[Command] or [Shift] and click).
Track	When you import an audio CD track, the file will be named according to the name in this column. You can rename a track by clicking in the Track column and typing a new name. You can also apply a name to all audio CD tracks (e.g. the name of the album, see below).
Length	The length of the whole audio CD track, in minutes and seconds.
Size	The file size of the whole audio CD track, in MegaBytes.
Grab Start	You can grab a section of a track if you like. This indicates the start of the section to be grabbed in the track. By default, this is set to the start of the track (0.000) but you can adjust this on the grab selection ruler (see below).
Grab End	Indicates the end of the section to be grabbed in the track. By default, this is set to the end of the track but you can adjust this on the grab selection ruler (see below).

- You can audition the selected audio CD track by clicking the Play button. The track will be played back from the grab selection start (see below) to the track end (or until you click the button again). During playback, the button is labeled "Stop".
- The arrow buttons next to the Play button allow you to audition the start and end of the grab selection only. The left button will play a short snippet beginning at the start of the grab selection (see below), while the right button will play a snippet starting just before the end of the grab selection.
- If you want to import a section of an audio CD track only, you select the track in the list and specify the start and end of the grab selection by dragging the handles in the grab selection ruler. Use the start and end audition buttons to fine tune the selection boundaries.



Note that you can import sections of several audio CD tracks by selecting them in turn and adjusting the grab selection. The grab start and end settings for each track will appear in the list.

- If you wish, you can change the generic audio file name in the File Name field.
By default, the imported audio files will get this name with a track number added (typically Track 01, Track 02, and so on). However, if you have adjusted the track name for a specific audio CD track in the list, the corresponding audio file will use that name instead.
- By default, imported audio CD tracks will be stored as Wave files (Windows) or AIFF files (Mac) in the Audio folder of the current project. You can select another folder by clicking the Change Folder button.
- Clicking the Grab button will convert the selected audio CD tracks (the tracks for which the Grab checkbox is ticked) to audio files.
The grabbed files will be listed at the bottom of the dialog – click OK to actually import the files into the project and close the dialog, or click Cancel to discard the grabbed files.

Importing Audio from Video files

While you can automatically extract the audio when importing a video file (see [page 662](#)), it is also possible to import the audio from a video file without importing the video itself:

1. Pull down the File menu and select “Audio from Videofile” from the Import submenu.
2. In the file dialog that appears, locate and select the video file and click Open.

The audio in the selected video file is extracted and converted to a Wave file in the project's Audio folder.

- A new Clip is created and added to the Pool. If the Project Window is active, an Event will be inserted on the selected Track at the project Cursor position.

This works just like when importing regular audio files.

Importing ReCycle files

ReCycle, developed by Propellerhead Software, is a program designed especially for working with sampled loops. By “slicing” a loop and making separate samples of each beat, ReCycle makes it possible to match the tempo of a loop and edit the loop as if it was built up of individual sounds. Nuendo can import two file types created by ReCycle:

- REX files (export file format of the first versions of ReCycle, extension “.rex”).
- REX 2 files (file format of ReCycle 2.0 and later, extension “.rx2”).

Proceed as follows:

1. Select an audio track and move the project cursor to where you want the imported file to start.
You probably want to import REX files to tempo based audio tracks, since this will allow you to change the tempo later on (having the imported REX file automatically adjust).
2. Select “Audio File...” from the Import submenu on the File menu.
3. Select REX files or REX 2 files with the file type pop-up menu in the file dialog.
4. Locate and select the file and click Open.

The file is imported, and automatically adjusted to the current Nuendo tempo.

Unlike a regular audio file, the imported REX file will consist of several events, one for each “slice” in the loop. The events will automatically be placed in an audio part on the selected track, and positioned so that the original internal timing of the loop is preserved.

5. If you now open the part in the Audio Part Editor, you can edit each slice separately by muting, moving and resizing events, adding effects and processing, etc.
You can also adjust the tempo and have the REX file automatically follow (provided that its track is tempo based).
- You can also achieve similar results by using Nuendo’s own loop slicing features.

See [page 402](#).

Importing compressed audio files

During the last years, various audio compression formats have become very common. The major advantage of using such file formats is that the file size is significantly reduced, with very little degradation of sound quality. This allows for quick download, mass storage and easy transportation.

Nuendo can import (and export, see [page 597](#)) several common audio compression formats. The procedure is the same as when importing any non-compressed audio file, with one important thing to note:

-
- If you import a compressed audio file, Nuendo will create a copy of the file and convert this to Wave format (Windows) or AIFF format (Mac OS X) before importing it (the original compressed file will not be used in the project). The Wave/AIFF file will be placed in the designated project Audio folder. Please be aware that the converted Wave/AIFF file will be several times larger than the original compressed file!**
-

The following file types are supported:

MPEG audio files

MPEG, which stands for Moving Picture Experts Group, is the name of family of standards used for coding audio-visual information (e.g. movies, video, music) in a digital compressed format.

Nuendo can read three types of audio MPEG files: MPEG Layer 1 (file extension *.mpeg), MPEG Layer 2 (*.mp2) and MPEG Layer 3 (*.mp3). Currently, mp3 is the most common format of these, while the mp2 format is mostly used in broadcast applications.

- **Note that the file extension “.mpeg” can also be used by MPEG video files.**
If you select an MPEG video file in the Import Audio dialog you will not be able to import it.

Ogg Vorbis files

Ogg Vorbis is a relatively new format that is open and patent-free and offers very small audio files maintaining comparatively high audio quality. Ogg Vorbis files have the extension “.ogg”.

Windows Media Audio files (Windows only)

Windows Media Audio is an audio format developed by Microsoft Inc. Due to advanced audio compression algorithms, Windows Media Audio files can be made very small, maintaining good audio quality. The files have the extension ".wma".

Options and Settings

Auto Save



If you activate the Auto Save checkbox in the Preferences dialog (General page), Nuendo will automatically save backup copies of all open projects with unsaved changes.

- You specify how often a backup copy should be created with the Auto Save Interval setting.
- Backup copies are named "Name.bak", where "Name" is the name of the project. The files are saved in the project folder.
- Unsaved projects are also backed up in the same way.
Backup copies of unsaved projects will be named "#UntitledX.bak" where "X" is an incremental number, to allow multiple backup copies in the same project folder.


Startup Options



The “On Startup” pop-up menu in the Preferences dialog (General page) allows you to specify what should happen each time you launch Nuendo. The following options are available:

Option	Description
Do Nothing	Nuendo launches without opening a project.
Open Last Project	The last saved project is opened on launch.
Open Default Project	The default project is opened (see page 680).
Show Open Dialog	The Open dialog appears on launch, allowing you to manually locate and open the desired project.
Show Template Dialog	The Template dialog appears on launch, allowing you to create a new project from one of the templates.
Show Open Options Dialog	The Open Document Options dialog appears on launch, see below. It allows you to make a different choice each time you launch Nuendo.

Nuendo Open Document Options Dialog

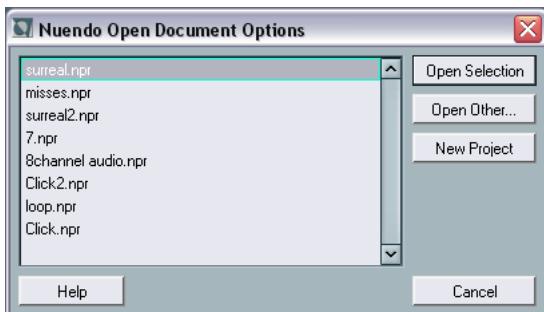

The Nuendo projects you have used recently are displayed in the list. To open one of them, select it and click the “Open Selection” button. To open another project not listed there, click the “Open Other...” button. A file dialog appears that allows you to look for the desired file on your disk. Click the “New Project” button to create a new project using a template or not.

If you hold down [Ctrl]/[Command] while launching Nuendo this dialog will always be displayed, regardless of the startup option selected in the Preferences dialog (General page).

32

Customizing

Background

The user can customize the appearance and functionality of Nuendo in various ways.

User configurable items described in this chapter are:

- **Window layouts**

By storing different window combinations as window layouts, you can quickly switch between different working modes – see [page 707](#).

- **Transport panel**

The user can configure which Transport panel items are to be shown or hidden, and where they should be located – see [page 710](#).

- **Toolbars**

In the project window and all editor windows, the user can configure which toolbar items are to be shown or hidden, and where they should be located – see [page 712](#).

- **Track list**

The controls shown in the Track list can be set for each track type – see [page 714](#).

- **Configuration of main menu items**

The user can hide items not needed on the main menus – see [page 719](#).

- **Preferences presets**

You can save and recall preference settings as preference presets – see [page 722](#).


- **Appearance**

The general look of the program can be adjusted – see [page 724](#).

This chapter also contains a section describing where your preferences and settings are stored (see [page 724](#)), to help you transfer your customized settings to another computer.

Working with window layouts

A configuration of windows for the active project is called a “window layout”. By storing different window combinations as window layouts, you can quickly switch between different working modes. You may for example want as large a Project window as possible when you are editing, whereas you may want the mixer and effect windows open during mixdown. Window layouts are listed and managed on the Window Layouts submenu on the Windows menu.

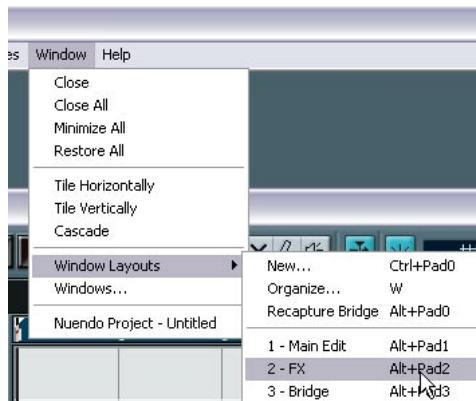

Editing the active window layout

There is always one layout active, even if you haven't saved any. To make changes to the active window layout, proceed as follows:

- Make the desired changes to the window configuration.
This may include opening, closing, moving and sizing windows, and adjusting zoom and track height.

The changes are automatically stored for the active layout.

Creating a new window layout

1. Set up the windows you want to include in the window layout.
This may include opening, moving and sizing windows, and adjusting zoom and track height.
2. Pull down the Windows menu and open the Window Layouts submenu.

3. Select “New...”.



4. In the dialog that appears, enter a name for the window layout.

5. Click OK.

The window layout is stored and will appear on the Window Layouts submenu. It will now be the active layout.

Activating a window layout

1. Pull down the Window menu and open the Window Layouts submenu.

2. Select the window layout from the list on the submenu.

The windows are closed, opened, moved and/or resized according to the stored window layout.

- You can also activate any of the first nine window layouts using key commands.

By default, this is done by pressing [Alt]/[Option] and the corresponding key on the numeric keypad ([Alt]/[Option]-[1] selects layout 1, and so on).

Recapture layout

This allows you to change a stored layout:


1. First select a stored layout so that it is active.

2. Change the setup of the windows the way you want them and select Recapture.

3. In the dialog that appears, click OK to save the changes to the layout. If you wish, you can also rename the layout in the dialog.

Organizing window layouts

If you select “Organize...” from the Window Layouts submenu, a dialog opens, listing all available window layouts.

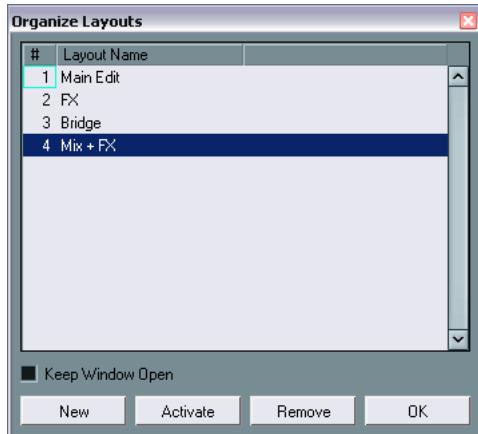


- To rename a window layout, double click its name in the list and type in a new name.
- To create a new window layout based on the current window configuration, click the New button.
The new layout appears in the list allowing you to adjust its name and properties.
- To activate a layout, either select it and click the Activate button, or double click in the number column to the left.
The layout is activated and the dialog is closed (unless the “Keep Window Open” checkbox is ticked).
- To remove a window layout, select it in the list and click the Remove button.
The layout is removed from the list.
- To close the dialog, click the OK button.
Note that you can continue working in other windows with the Organize Layouts dialog open.

Customizing the Transport panel

You can customize the appearance of the Transport panel by deciding which parts of it you wish to be visible, and where the parts should be located on the panel.

Setting which items are shown/hidden


If you right-click (Win) or [Ctrl]-click (Mac) anywhere within the Transport panel area, a pop-up menu will appear. On this menu, you can directly check or uncheck elements of the Transport panel as desired.

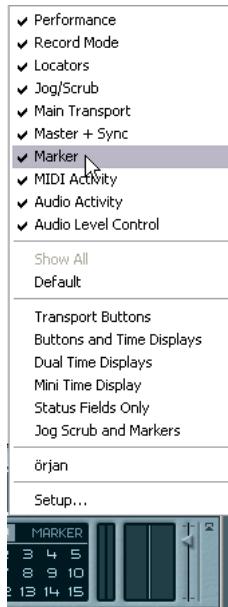

You can also select different preset configurations from the lower half of the menu. To make all hidden items visible again, select "Show All".

The Transport Setup dialog

If you right-click (Win) or [Ctrl]-click (Mac) anywhere within the Transport panel area and select “Setup...” from the pop-up menu, a dialog appears. In this dialog you can also configure where the separate parts should be placed on the panel as well as saving/recalling different configurations of the Transport panel.

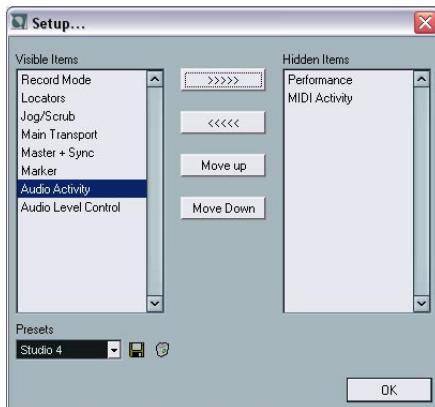

The dialog is divided into two columns. The left column displays the currently visible items on the Transport panel, and the right column displays the currently hidden items.

- You can change the current show/hide status by selecting items in one column and then use the arrow buttons in the middle of the dialog to move them to the opposite column.
Changes are applied directly.
- By selecting items in the “Visible Items” column and using the Move Up and Move Down buttons you can change the position of the selected item(s) on the Transport panel.

Changes are applied directly. To undo all changes and revert back to the standard Transport panel layout, you can select “Default” from the pop-up menu accessed by right-clicking/[Ctrl]-clicking the Transport panel.



A “customized” Transport panel


- If you click the Save button (disk icon) in the Presets section, you can name the current configuration and to save it as a preset.
The saved setting appears in the Presets field.
- To remove a preset, select it and click the trash icon.
- Saved configurations are available for selection from the Presets pop-up in the dialog, or directly from the pop-up menu brought up by right-clicking or [Ctrl]-clicking the Transport panel.

Customizing the toolbars

You can customize the appearance of the toolbars in the Project window and editor windows by deciding which sections should be visible, and where the sections should be located on the panel. The screenshots below illustrate customizing the Project window toolbar but you can use the same procedures for the toolbars in the Sample Editor, the MIDI editors and the Tempo Track Editor.

Setting which items are shown/hidden


If you right-click (Win) or [Ctrl]-click (Mac) anywhere within the toolbar area, a pop-up menu will appear. On this menu, you can directly check or uncheck elements of the toolbar as desired.

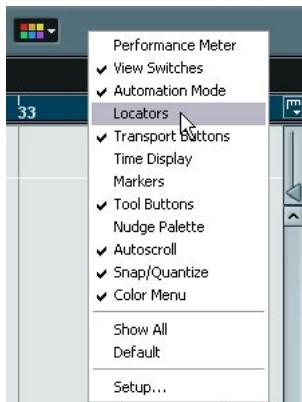

You can also select “Show All” (makes all hidden items visible) or “Default” (makes all hidden items visible – except those that are hidden by default – and moves them back to their standard locations).

The toolbar Setup dialog

If you select “Setup...” from the pop-up menu, a dialog appears. In this dialog you can also configure where the separate items should be placed on the toolbar as well as saving/recalling different configurations of the toolbar.

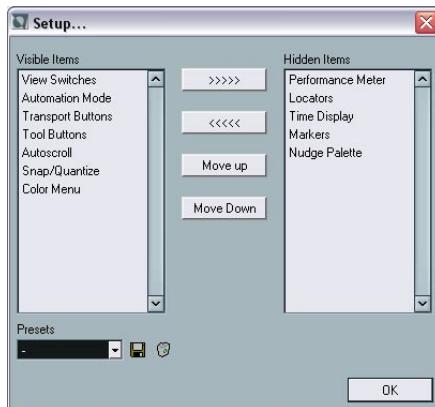

The dialog is divided into two columns. The left column displays the currently visible items on the toolbar, and the right column displays the currently hidden items.

- You can change the current show/hide status by selecting items in one column and then use the arrow buttons in the middle of the dialog to move them to the opposite column.
Changes are applied directly.
- By selecting items in the “Visible Items” column and using the Move Up and Move Down buttons you can change the position of the selected item(s) on the toolbar.
Changes are applied directly.



A “customized” toolbar

- If you click the Save button (disk icon) in the Presets section, a text field appears, allowing you to name the current configuration and to save it as a preset.
The saved setting appears in the Presets field.
- To remove a preset, select it and click the trash icon.
- Saved configurations are available for selection from the Presets pop-up in the dialog, or directly from the pop-up menu brought up by right-clicking or [Ctrl]-clicking the toolbar.


Customizing track controls

You can configure (separately for each track type) what track controls should be shown in the Track list. You can also specify the location of controls and group controls so that they are always shown adjacent to each other. All this is done using the Track Controls Settings dialog.

Opening the Track Controls Settings dialog

There are two ways to open the dialog:

- By right-clicking (Win) or [Ctrl]-clicking (Mac) a track in the Track list, and selecting “Track Controls Settings” from the menu that appears.
or
- By clicking the arrow in the top left corner of the Track list and selecting “Track Controls Settings”.

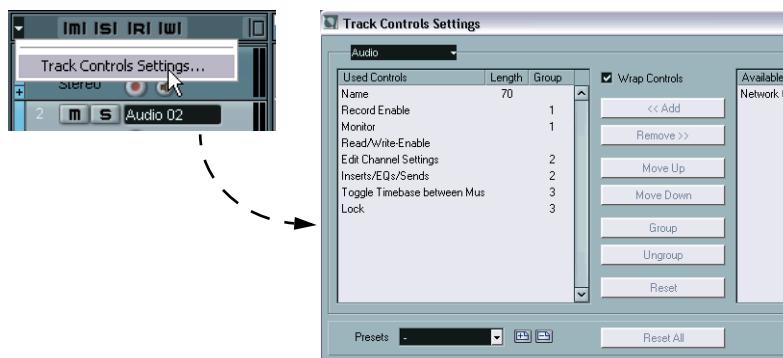

The dialog mainly consists of two lists, the left showing “Used Controls” and the right “Available Controls”.

- The items in the Used Controls list are the controls currently shown in the Track list for the selected track type.
- The items in the Available Controls list (if any) are controls currently hidden in the Track list for the selected track type.

Setting the track type

The settings made in the Track Controls Settings dialog apply to the selected track type (Audio, MIDI, Group/FX Channel, Folder, Video). If you right-clicked (Win) or [Ctrl]-clicked (Mac) an audio track to open the dialog for example, the settings for audio tracks are automatically displayed. The selected track type is shown in the menu display in the top left corner of the dialog.

- To change the selected track type, click the arrow to the right in the menu display and select a track type from the pop-up menu that appears.

All settings made in the dialog will apply to all tracks (current and subsequent) of the selected type.



The track type pop-up

Removing track controls

To remove track controls in the Track list, proceed as follows:

1. Make sure you have selected the desired track type (see above).
 2. Select the control(s) you wish to hide in the Used Controls list.
You can use standard multiple selection methods (i.e. [Shift] and [Ctrl]/[Command]).
 3. Click the “Remove” button.
The control(s) are moved to the Available Controls list.
 4. Click OK to remove the controls from the Track list.
- All controls can be removed except the Mute and Solo buttons.

Adding available track controls

To add available track controls to the Track list, proceed as follows:

1. Make sure you have selected the desired track type (see above).
2. Select the control(s) you wish to add in the Available Controls list and click the “Add” button.
3. Click OK to add the controls to the Track list.

Moving track controls

You can change the position or order of the track controls if you like:

1. Make sure you have selected the desired track type (see above).
2. Select the control(s) you wish to move in the Used Controls list.
3. Use the “Move Up” and “Move Down” buttons to reposition the selected controls up or down in the Track list.
4. Click OK.
The controls are moved.

Grouping track controls

If you resize the Track list, the position of the controls will change dynamically to accommodate as many controls as possible in the available space (given that Wrap Controls is activated – see below). By grouping several track controls you can ensure that they will always be positioned side by side in the Track list. To group controls, proceed as follows:

1. Make sure you have selected the desired track type (see above).
2. Select at least two controls you wish to group in the Used Controls list.
 - You can only group controls that are adjacent to each other in the Used Controls list. To group controls that are currently not adjacent in the list, use the Move Up/Down buttons first.
3. Click Group.
A number is displayed in the Group column for the grouped controls. The first group created will have the number 1, the second 2 and so on.
4. Click OK.
The controls are now grouped.

About Wrap Controls

This is by default activated (checked). Wrap Controls is the function that allows the controls to be dynamically repositioned when resizing the Track list. That is, as many controls as can fit in any given space will be displayed depending on how you resize the Track list.

If you deactivate Wrap Controls, the positions of the controls will be fixed, regardless of the size of the Track list. In this mode, you may have to resize the tracks vertically (by dragging the dividers between them) to display all the controls.

About the Length column

The Length column in the Used Controls list allows you to set the maximum number of characters allowed in certain text fields (Name, Output). To change the setting, click on the number in the Length column and type in a new value.

About Reset

There are two Reset buttons in the dialog:

- Clicking Reset will restore all default track controls settings for the selected track type.
- Clicking Reset All will restore all default track controls settings for all track types.

Saving Presets

You can save track control settings as presets for later recall:


1. Click on the Save icon beside the Presets name field.
A dialog appears allowing you to type in a name for the preset.
2. Click OK to save the settings as a preset.
Saved presets are available for selection from the Presets pop-up and from the pop-up at the top left corner of the Track list.
3. To remove a preset, select it in the Track Controls Settings dialog, and click the Delete icon beside the Presets name field.

Configuring the main menu items

- ☐ Configuring the main menus is a feature intended for experienced Nuendo users. Don't hide menus or menu items unless you are sure of the fact that you do not need them!

You can configure what items should be shown on the main menus and submenus, and even hide entire menus. By customizing the menus you can chose to hide items relating to program functions you never use, to customize the program according to your needs. For example, if you never use the scoring features in Nuendo, you can hide the entire Scores menu from view.

1. Open the Preferences dialog and select the Configuration page.
The Configuration page contains two parent folders; "Main Menu", which contains subfolders for all main menus, and "Command Categories" which contains subfolders for all Command categories. This section will only describe how to configure Main Menu items, not Command Categories (these are described [onpage 732](#)).

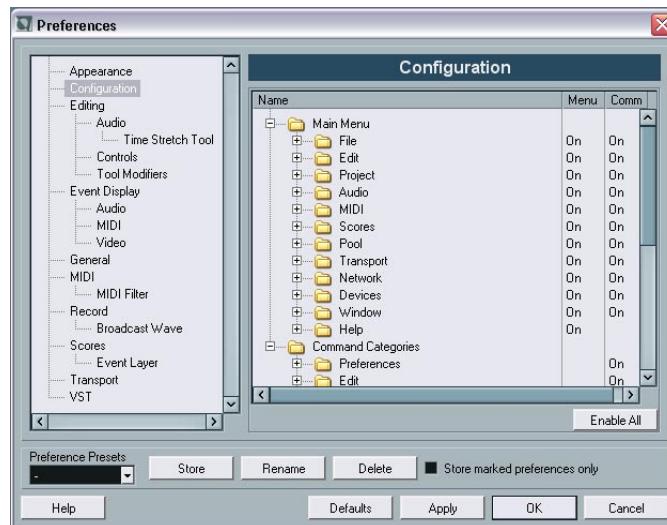

2. Click on the plus sign for a subfolder item, e.g. the File subfolder.
 As you can see, all items and subfolders on the File menu are listed in the Name column.

Name	Menu	Comm
Main Menu	On	On
File	On	On
New Project	On	On
New Library...	On	On
Open...	Off	On
Open Library...	Off	On
Close	On	On
Save	On	On
Save As...	On	On
Save Project to New Folder...	On	On
Save as Template...	On	On
Save Library...	On	On
Revert	On	On
Page Setup...	On	On
Print...	On	On
Import	On	On
Export	On	On

Enable All

- In the Menu column you can decide which File menu items to hide from view, simply by clicking in the column beside the corresponding menu item you wish to hide.
 If you click the “On” in the Menu column for an item, it changes to “Off” and vice versa. All menu items set to “Off” will be hidden when you click Apply or OK.
- Certain essential menu items on the File and Edit menus cannot be hidden, such as Save, Open, Close, Undo/Redo etc.
 For these items there is no entry in the Menu column.
- If you set a main menu folder (as opposed to a menu item) to Off in the Menu column, the entire menu will be hidden from view.
 The exception to this is if the main menu folder contains non-removable menu items, in which case all hideable items on the menu will be set to Off, but the menu will still be visible.
- The Command column sets the key command On/Off status for the corresponding menu item.
 If this is set to Off, any assigned key command for the item will be disabled (see [page 732](#) for more information).
- You can save menu configurations as preference presets, either separately or together with other Preferences dialog settings – see below.

3. By using the above methods, you can customize all main menus to your liking.

To apply the changes without exiting the dialog click "Apply". Click OK to apply the changes and exit the dialog.

- To restore all menu items to their default setting (which is visibility and key commands on for all menus and menu items), click the Defaults button.

Note that the Defaults button only restores the settings on the currently selected *page* (the Configuration page in this case) to their default settings. If you have changed settings on another page of the Preferences dialog, these are not reset.

About preference presets


It is possible to save complete or partial preferences settings as presets. This lets you recall settings quickly and easily.

Saving a preference preset

When you have made your preferences settings, proceed as follows to save all settings as a preset:

1. If the dialog is not already open, select Preferences from the File menu (Win)/Nuendo menu (Mac).
2. Make sure that the “Store marked preferences only” box is *not* checked.

This is because this option is used for saving partial settings (see below), as opposed to complete settings.

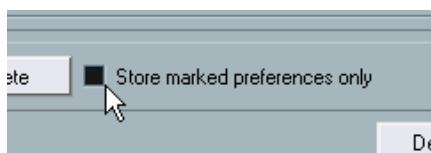

3. Click the Store button in the lower left section of the Preferences dialog.
A dialog appears, allowing you to type in a name for the preset.
4. Click OK to save.
Your saved settings will now be available from the Preference Presets pop-up for your future projects.

Loading a preference preset

To load a saved preference preset, proceed as follows:

1. Select Preferences from the File menu (Win)/Nuendo menu (Mac).
2. Select the saved preset from the Preference Presets pop-up.
3. Click OK to exit the Preferences dialog and apply the saved preset settings.


Saving partial preferences settings

It is also possible to save partial preferences settings. This is useful when you have made settings that perhaps only relate to a specific project or settings that you wish to apply only in certain situations for example. When you apply a saved partial preference preset you only change the specific saved settings, and all other Preferences dialog settings will be left unchanged.

When you have made your specific preferences settings, proceed as follows to save the partial settings as a preset:

1. Open the Preferences dialog.
2. Activate the “Store marked preferences only” checkbox.

When this is on, a new “Store” column appears in the Preferences page list.

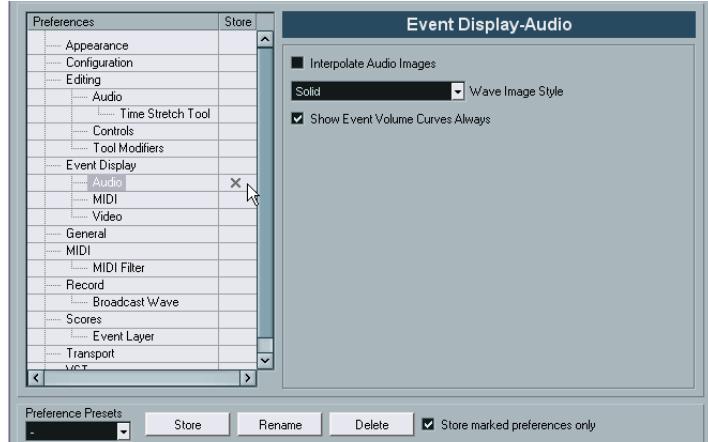

3. Click in the Store column for the Preferences items you wish to save. Note that if you check a Preferences page that contains subpages these will automatically also be checked. If this is not what you want, simply uncheck the subpages.
4. Click the Store button in the lower left section of the Preferences. A dialog appears, allowing you to type in a name for the Preset. It is a good idea to choose a descriptive name for a partial preference preset, preferably relating to the saved settings (for example “Configuration” or “Editing-Controls” etc.).
5. Click OK to save.

Your saved settings will now be available from the Preference Presets pop-up for your future projects.

Appearance

In the Preferences dialog you will find a page called Appearance. Here you can adjust the look of the program, with the following settings:

- Basic Appearance Scheme.

By selecting an option from this pop-up menu you can adjust the general look of the program. After selecting an Appearance Scheme and clicking Apply or OK, you need to restart the program for the changes to take effect.

- Brightness/Intensity sliders.

These sliders allow you to fine-tune the brightness and contrast in various areas in the program. Changes take effect when you click Apply or OK.

Where are the settings stored?

As you have seen, there are a large number of ways in which you can customize Nuendo. While some of the settings you make are stored in each project, others are stored in separate preference files.

If you need to transfer your projects to another computer (e.g. in another studio), you can bring all your settings along by copying the desired preference files and installing them on the other computer.

- **It's a good idea to make a backup copy of your preference files once you have set things up the way you want!**

This way, if another Nuendo user wants to use his or her personal settings when working on your computer, you can restore your own preferences afterwards.

The table below shows the location and name of each preference file.

- Under Windows, these are stored in the folder “\Documents and Settings\<user name>\Application Data\Steinberg\Nuendo\”.
- Under Mac OS X, they are stored in the folder “Library/Preferences/Nuendo/” under your “home” directory.
The full path would be: “/Users/<user name>/Library/Preferences/Nuendo/”.

Any exceptions to the above are stated in the table.

Setting	Stored in
Current edit modifier keys	Edit Modifiers.xml
Current key commands	Key Commands.xml
Current preferences	Nuendo Defaults – Mac OS X only; under Windows, preferences are stored in the Registry: HKEY_CURRENT_USER\Software\Steinberg\Nuendo\Defaults(2)
Alternative key commands	Alt_Keycommands\<Preset Name>.xml
Batch process presets	Presets\Batch Processes\<Preset Name>.xml
Color setup	saved in project
Crossfade presets	Presets\RAMPresets.xml
Drum maps	saved in Project/Export as *.drm file
EQ presets	Presets\RAMPresets.xml
Installed MIDI devices	Midi Devices.bin
Key commands presets	Presets\KeyCommands\<Preset Name>.xml
Logical Editor presets	Presets\Logical Edit\<Preset Name>.xml
MIDI FX presets	Presets\<Plugin Name>\<Plugin Name>.xml
Mixer view preset	saved in project
Network settings/shared projects	Network Manager.xml
Network user permissions	User Permission.xml
Preferences configurations	Configuration.xml
Preferences presets	Presets\Configurations\<Preset Name>.xml
Quantize presets	Presets\RAMPresets.xml
User templates	templates\<Template Name>.npr
Toolbar presets	Presets\RAMPresets.xml
Track controls presets	Presets\RAMPresets.xml
Transport panel presets	Presets\RAMPresets.xml

Setting	Stored in
Usage profile log	Usage Profile.xml
VST connections presets	Presets\RAMPresets.xml
Window layouts	Window Layouts.xml
Zoom presets	Presets\RAMPresets.xml
Audio plugin presets	Presets\RAMPresets.xml

33

Key commands

Background

Introduction

Most of the main menus in Nuendo have key command shortcuts for certain items on the menus. In addition, there are numerous other Nuendo functions that can be performed via key commands. These are all default settings. If you want, you can customize existing key commands to your liking, and also add commands for menu items and functions currently not assigned any.

-
- You can also assign tool modifier keys, i.e. keys that change the behavior of various tools when pressed. This is done in the Preferences dialog – see [page 742](#).
-

How are key commands settings saved?

Every time you edit or add any key command assignment, this is stored as a global Nuendo preference – *not* as part of a project. Hence, if you edit or add a key command assignment, any subsequent projects that you create or open will use these modified settings. However, the default settings can at any time be restored by selecting “Reset All” in the Key Commands dialog.

In addition, you can save complete or partial key commands settings as a “key commands file”, which is stored separately and can be imported into any project. This way you can quickly and easily recall customized settings, when moving projects between different computers, for example. The settings are saved in a file on disk with the windows extension “.xml”.


See later in this chapter for details on how to save key commands settings.

Setting up Key Commands

The following is a description of how you set up key commands and save them as presets for easy access.

Key commands settings are accessed and edited mainly in the Key Commands dialog, but there are also some settings that can be made in the Preferences dialog, and these are also addressed in this chapter.

Adding or modifying a key command

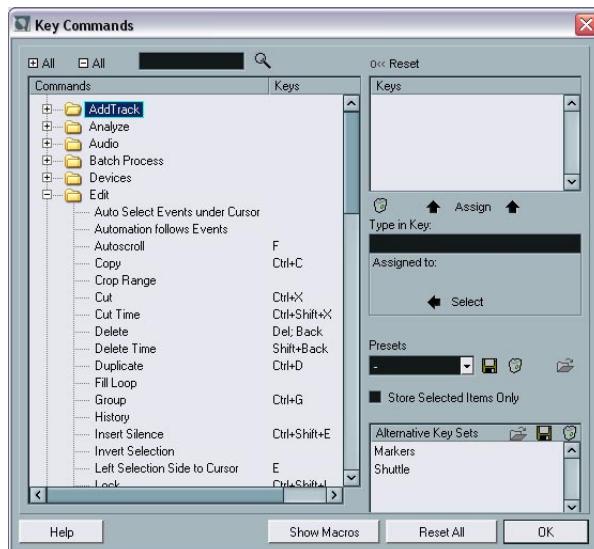


In the Key Commands dialog you will find all main menu items and a large number of other functions, arranged in a hierarchical way similar to that of the Windows Explorer and Mac OS Finder. The categories are represented by a number of folders, each containing various menu items and functions. When you open a category folder by clicking the plus-sign beside it, the items and functions it contains are displayed with the currently assigned key commands.

To add a key command, proceed as follows:

1. Pull down the File menu and select “Key Commands...”.
The Key Commands dialog appears.
2. Use the list in the Commands column to navigate to the desired category.
3. Click the plus-sign to open the category folder and display the items contained in it.
Note that you can also click the “global” plus- and minus-signs in the top left corner to open and close *all* category folders at once.
4. In the list, select the item to which you wish to assign a key command.
Already assigned key commands are shown in the Keys column as well as in the Keys section in the top right corner.

If a selected item or function has a key command assigned already, it is displayed here...

...and here.

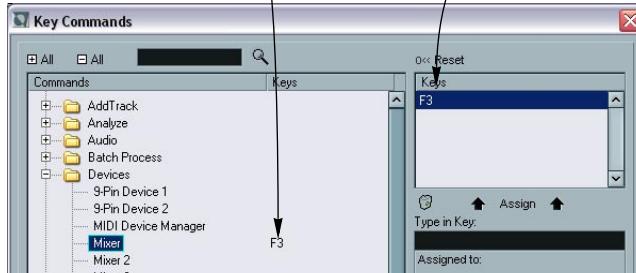

5. Alternatively, you can use the search function in the dialog to find the desired item.
For a description of how to use the search function, see [page 733](#).
6. When you have found and selected the desired item, click in the “Type in Key” field and enter a new key command.
You can choose between any single key or a combination of one or several keys (Command, Option (Mac), Ctrl, Alt (Win), Shift) plus any key. Just press the keys you want to use.

7. If the key command you entered is already assigned to another item or function, this is displayed below the “Type in Key” field.



In the case that a key command already is assigned to another function, you can either ignore this and proceed to assign the key command to the new function instead, or you can select another key command.

8. Click the Assign button above the field.

The new key command appears in the Keys List.

-
- If the key command you enter is already assigned to another function, you will get a prompt asking if you want to reassign the command to the new function instead, or cancel the operation.
-

Note that you can have several different key commands for the same function. So adding a key command to a function that already has another key command will not replace the key command previously defined for the function. If you wish to remove an assigned key command, please see [page 734](#).


9. Click OK to exit the dialog.

Turning Key Commands off

Nuendo also gives you the option of turning key commands off, meaning that even if a function has a key command assigned to it, you can disable the key command.

This is done in the Preferences dialog, in the following way:

1. Open the Preferences dialog from the File menu (under Mac OS X it is located on the Nuendo menu) and select the Configuration page. As you can see, the Configuration page contains two main folders; "Main Menu" and "Command Categories".

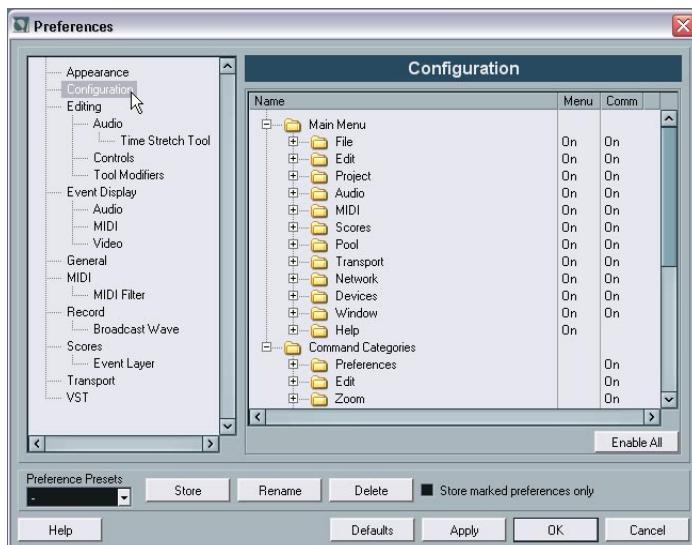

- The "Main Menu" folder contains a number of subfolders, which in turn each contains items found on the main menus in Nuendo.
- The "Command Categories" folder also contains a number of subfolders, each of which contains a number of program functions not available on any of the main menus.

All the items and functions in the subfolders can have key commands assigned to them. The column to the right, labeled "Comm", allows you to set the On/Off status for the corresponding items. This indicates whether it should be possible to use assigned key commands for the items or not.

2. Click on the plus-sign beside one of the main folders to open it and list the subfolders it contains.
3. Open the desired subfolder by clicking its plus-sign, navigate to the item for which you want to disable the assigned key command, and select it.
4. Click in the “Comm” column beside the item to set the status to “Off”. Now it will not be possible to use any key command assigned to that menu item or function.
5. Repeat this for all items or functions for which you want to disable key commands.
 - Note that if you set an entire subfolder to “Off” in this way, all the items or functions it contains will automatically be set to “Off” as well.
If this is not what you want, you can reset separate items in the subfolder to “On”.
6. When you're done, click OK to close the Preferences dialog and apply the changes.

Searching for key commands

If you want to know which key command is assigned to a certain function in the program, you can use the Search function in the Key Commands dialog:

1. Click in the search text field at the top left of the dialog and type in the function for which you want to know the key command.
This is a standard word search function, so you should type the command as it is spelled in the program. Partial words are OK; to search for e.g. all quantize related commands you could type “Quantize”, “Quant”, etc.
2. Click the Search button (the magnifying glass icon).
The search is conducted and the first matching command is selected and displayed in the commands list below. The keys column and the keys list show the assigned key commands, if any.
3. To search for more commands containing the word(s) you entered, just press the Search button again.
4. When you're done, click OK to close the dialog.

Removing a key command

To remove a key command, proceed as follows:

1. If the key commands dialog isn't already open, pull down the File menu and select "Key Commands...".
2. Use the list of categories and commands to select the item or function for which you wish to remove a key command.
The key command for the item is shown in the Keys list and the Keys column.
3. Select the key command in the Keys list and click the Remove button (the trash icon).
You will get a prompt asking if you want to remove the key command or cancel the operation.
4. Click OK to close the dialog.

Setting up Macros

A Macro is a combination of several functions or commands, to be performed in one go. For example, you could select all events on the selected audio track, remove DC offset, normalize the events and duplicate them, all with a single command.

Macros are set up in the Key Commands dialog as follows:

1. Click the Show Macros button.
The Macro settings are shown in the lower part of the dialog. To hide these from view, click the button (now renamed to Hide Macros) again.
2. Click New Macro.
A new, unnamed Macro appears in the Macros list. Name it by typing the desired name. You can rename a Macro at any time by clicking it in the list and typing a new name.
3. Make sure the Macro is selected, and then use the Categories and Commands in the upper half of the dialog to select the first command you want to include in the Macro.
4. Click Add Command.
The selected command appears in the list of Commands in the Macros section.

5. Repeat the procedure to add more commands to the Macro.

Note that commands are added after the currently selected command in the list. This allows you to insert commands “in the middle” of an existing Macro.



A Macro with three commands.

- To remove a command from the Macro, select it in the Macros list and click Delete.
- Similarly, to remove an entire Macro, select it in the Macros list and click Delete.

After you've closed the Key Commands dialog, all Macros you have created appear at the bottom of the Edit menu, available for instant selection.



You can also assign key commands to Macros. All Macros you have created appear in the upper section of the Key Commands dialog under the Macros category – just select a Macro and assign a key command as with any other function.

Saving complete key commands settings

As previously mentioned, any changes made to the key commands (and Macros) are automatically stored as a Nuendo preference. It is however also possible to store key commands settings separately. In this way, you can store any number of different key command settings, complete or partial, as Presets for instant recall.

Proceed as follows:

1. Set up the key commands and Macros to your liking.
When setting up key commands, remember to click "Assign" to make the changes.
2. Make sure that the "Store Selected Items Only" box is *not* checked.
This option is for saving partial key commands settings only (see below).
3. Click the Save button (the disk icon) by the Presets pop-up menu.
A dialog appears, allowing you to type in a name for the Preset.



4. Click OK to save the Preset.

Your saved key commands will now be available in the Preset pop-up menu for your future projects.

Saving partial key commands settings

It is also possible to save partial key commands settings. This is useful for example if you have made settings that only relate to a specific project or settings that you wish to apply only in certain situations. When you apply a saved partial Preset you only change the specific saved settings, while all other key commands settings will be left unchanged.

When you have set up the key commands and macros, proceed as follows to save the partial settings as a Preset:

1. Click in the “Store selected items only” box to check it.

When you check this box, a new “Store” column appears in the Commands list.



2. Click in the Store column for the key commands items you wish to save. Note that if you check an entire category *folder*, as opposed to separate commands, all commands it contains will automatically also be checked. If this is not what you want, uncheck the commands you don't want to include.

3. Click the Save button (the disk icon) next to the Presets pop-up menu.

A dialog appears, allowing you to type in a name for the Preset.

4. Click OK to save.

Your saved key commands settings will now be available from the Preset pop-up menu for your future projects.

Loading saved key command settings

To load saved key command settings, proceed as follows:

- **Note that this operation may replace existing key commands!**

The key command settings you load will replace the current key command settings for the same functions (if any). If you have Macros of the same name as those stored in the preset you load, these will be replaced too.

If you want to be able to revert to your current settings again, make sure to save them first, as described above!

1. Open the Key Commands dialog from the File menu.
2. Select the saved key commands preset you wish to open from the Presets pop-up.
3. Click OK to exit the Key Commands dialog and apply the saved preset settings.

The loaded key commands settings now replace the current key command settings.

Loading saved key commands settings from earlier versions of Nuendo

If you have used a previous version of Nuendo, you may have saved key commands settings from it that you'd like to use in Nuendo 2.0. This is possible by using the Import function, which lets you load and apply either saved key commands or macros:

1. Open the Key Commands dialog from the File menu.
2. Click the “Import” button (the folder icon) to the right of the Presets pop-up menu.

A standard browser dialog opens.



The Import button

3. In the browser dialog, use the “Files of type:” pop-up to specify if you want to import a Key Commands File (Windows file extension “.key”) or a Macro Commands File (extension “.mac”).

In Nuendo 2.0, Key Commands files include any Macro settings and use the Windows extension “.xml”. So after you have imported an older file, you might want to save it as a Preset (as described on [page 736](#)) to be able to access it from the Presets pop-up menu in the future.

4. Navigate to the file you want to import and click “Open”.
The file is imported.
5. Click OK to exit the Key Commands dialog and apply the imported settings.

The settings in the loaded key commands- or Macros file now replace the current settings.

About the “Reset” and “Reset All” functions

These two buttons in the Key Commands dialog will both restore the default settings. The following rules apply:

- “Reset” restores the default key command setting for the function selected in the Commands list.
 - “Reset All” will restore the default key commands for all commands.
-
- Note that the “Reset All” operation will cause any changes made to the default key commands to be lost! If you want to be able to revert to these settings again, make sure to save them first!
-

About the default key commands

As mentioned before, there are numerous default key commands. For an overview of these, please refer to the Getting Started book where they are listed for your convenience.

Using Alternative Key Sets

As an alternative to saving and loading key commands settings as previously described, you can set up and save “Alternative Key Sets”. This allows you to swiftly switch between different key commands settings “on the fly” while you are working in the program, instead of having to go into the Key Commands dialog to change them.

About the preset Alternative Key Sets

By default, Nuendo contains two different key sets:

- “Markers” is actually not an alternative key set, but rather, it is the default key set that you can switch back to at any time (see below).
- “Shuttle” is a specialized, alternative key set containing key commands settings for all of the Transport panel’s Shuttle controls.

You could edit and save these under the same names to replace them with your own settings should you so wish, but it is advised that you instead create additional key sets for your specific needs.

Saving an Alternative Key Set

Here's how to create and save an Alternative Key Set:

1. Open the Key Commands dialog from the File menu.
2. Set up the key commands and Macros the way you want them.
3. Decide whether you want to save complete or partial settings by checking or unchecking the “Store Selected Items Only” accordingly.
4. Click the Save button (the disk icon) in the Alternative Key Sets section. A dialog appears, allowing you to type in a name for the Preset.



5. Type in a name for the key set and click OK to save it.

The saved key set appears in the list of alternative key sets.

Editing an Alternative Key Set

To edit a saved key set, do the following:

1. Select it in the list and click the “Open button” (the folder icon) in the Alternative Key Sets section.
The key set is now activated, and the key commands settings are changed accordingly.
2. Make the desired changes.
3. Click the Save button (the disk icon) in the Alternative Key Sets section.
The key set is saved with the updated settings.

Removing a saved Alternative Key Set

- To remove a saved key set, select it in the list and click the “Remove” button (the trash icon) in the Alternative Key Sets section.
A dialog appears asking if you want to remove the key set or cancel the operation.

Switching between Alternative Key Sets

You switch between different key sets in the program by using the key command assigned to the function “Toggle Alternate Key Commands”, located in the “File” subfolder in the Key Commands dialog.

The key command for this function is by default [F5], but you can of course change this to any key command that suits you best. Refer to [page 729](#) for instructions on how to change key commands.

- When you press the key command for the function, a small pop-up appears, indicating which key set is currently loaded.




- Each time you press the key command, you switch to the next available alternative key set.

Setting up tool modifier keys

A tool modifier key is a key you can press to get an alternate function when using a tool. For example, clicking and dragging an event with the Arrow tool normally moves it – holding down a modifier key (by default [Alt]/[Option]) will copy it instead.

The default tool modifier keys are listed in the Getting Started book, but you can customize them if needed. This is done in the Preferences dialog:

1. Open the Preferences dialog from the File menu (on the Mac, this is located on the Nuendo menu) and select the Editing – Tool Modifiers page.

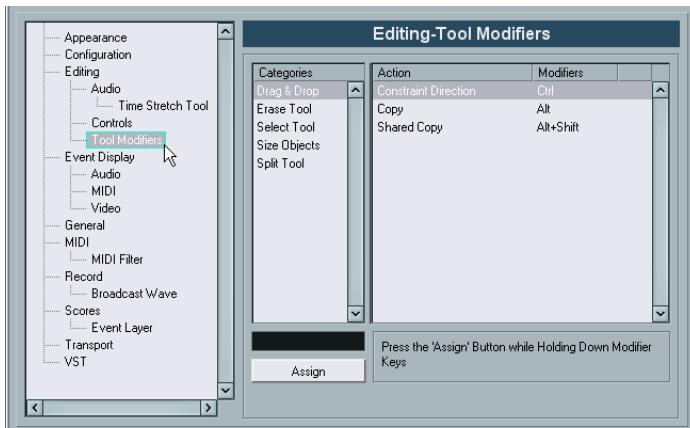

2. Select an option in the Categories list, and then locate the action for which you want to edit the modifier key.
For example, the "Copy" action mentioned above resides in the category "Drag & Drop".
3. Select the action in the Action list.
4. Hold down the desired modifier key(s) and click the Assign button.
The current modifier key(s) for the action is replaced. If the modifier key(s) you pressed are already assigned to another tool, you will be asked whether you want to overwrite them. If you do, this will leave the other tool without any modifier key(s) assigned.
5. When you're done, click OK to apply the changes and close the dialog.

Index

A

Activate Next/Previous Part 491
Activate project button 678
Active ASIO Ports for Data only 650
Active Part 490
Add Bus 18
Add Child Bus 18
Add Track 106
Adjust Fades to Range 163
Adjust Loop (Hitpoints) 404
AES31 files 685
Aftertouch
 Deleting 521
 Editing 517
 Recording 71
AIFF files 600
Alternative Key Sets 740
Always use MIDI Clock Start 627
Angle Mode 286
Any (MIDI channel setting) 67
Apogee UV22 HR 240
APP
 Introduction to 619
 Setting up 624
Appearance 724
Applying effects 351
ASIO 2.0 51
ASIO Device Ports
 Selecting for busses 18
 Setting up 16
ASIO Direct Monitoring 51
ASIO Positioning Protocol
 Introduction to 619
 Setting up 624
Attenuate (Surround Panner) 290

Audio channels

Copying settings 216
Linking 223
Making settings for 209
Saving settings 225

Audio clips

About 328
Creating new versions 428
Deleting 430
Locating events 431
Managing in Pool 428
Opening in the Sample Editor 437

Audio effects

About 230
Applying 351
Automating 307
Batch Processing 356
Editing 254
For output busses
 (Master inserts) 239
In surround configurations 292
Inserts 232
Loading 255
Naming 255
Organizing in subfolders 257
Post-fader inserts 232
Pre/Post fader sends 248
Presets 253
Recording with 60
Saving 255
Sends 246
Tempo sync 231
Using VST System Link 654

Audio events
 Blue handles 162
 Editing in Project Browser 581
 Editing in Sample Editor 368
 Fade handles 162
 Making selections in 378
 Slicing 416
 Volume handles 163

Audio files
 Converting 445
 Deleting permanently 430
 Exporting 597
 Format for recording 43
 Formats 438
 Import options 112
 Importing into Pool 438
 Importing into Project window 111
 Locating missing 434
 Reconstructing missing 435
 Removing missing 435

Audio parts
 About 83
 Creating by gluing events 121
 Creating from events 113
 Drawing 113
 Editing in Audio Part Editor 390
 Editing in Project Browser 580
 Sliding contents 125

Audition icon
 Audio Part Editor 396

Audition Loop icon
 Audio Part Editor 396

Auditioning
 Audio Part Editor 396
 MIDI editors 499
 Project window 114
 Sample Editor 375

Auto Fades 178

Auto Monitoring modes 49

Auto Quantize 68

Auto Save 702

Auto Select Events under Cursor
 MIDI editors 503
 Project window 117

AutoEdit 636

Autolatch mode 305

Automation
 About 294
 Editing in Project Browser 585
 Modes 304
 Opening automation sub-tracks 297
 Reduction Preference 316
 Showing and hiding 297
 Trimming/offsetting curves 305
 Write/Read buttons 303

Automation events
 About 309
 Editing 310
 Editing in Project Browser 314
 Removing 313
 Selecting 312

Automation follows Events 302

Automation Reduction Level 316

Automation subtracks
 Assigning parameters to 298
 Hiding and showing 301
 Muting 302

Autoscroll 140, 498

B

Backup (.bak) files 702

Bars+Beats Linear
 MIDI editors 493
 Tempo Track Editor 552

Basic Appearance Scheme 724

Batch Process 356

Beat Calculator 561

Bounce Selection
 Pool 440
 Project window 128
 Sample Editor 381
Brightness 724
Broadcast Wave files
 Exporting 604
 Recording 43
Browser 576
Busses
 About 14
 Adding 18
 Mixing down to file 596
 Routing to and from 20
 Viewing in the mixer 21
Bypass
 Effect sends 249
 Insert effects 234

C

Calculate (Hitpoints) 409
Channel (MIDI) 64
Channel Overview
 EQ 215
 Insert effects 235
Channel Settings
 Audio tracks 209
 Copying 216
 MIDI tracks 222
Channel view sets 193
Chase 36
Child Bus 18
Chn setting 67
Chord Recognition 495
Cleanup 683
Click 78
Clips, see “*Audio clips*”
Close 679
Close Gaps 420

Color pop-up menu
 MIDI editors 547
 Project window 107
Colorize Event Background 103
Conform Files 446
Constrain Delay Compensation 268
Control Playback Speed 636
Controller display
 About 495
 Adding and removing lanes 512
 Controller lane presets 514
 Editing events 517
 Editing velocity 515
 Selecting event type 513
Controllers
 Deleting 521
 Editing 517
 Recording 71
Convert Files 445
Convert to Real Copy 119
Count-in 78
Cpr files 678
Create Audio Images During Record 52
Create Events
 (Cycle Rec Mode) 55
Create Groove Quantize 417
Create new controller lane 512
Create Regions
 (Cycle Rec Mode) 56
Create slices 416
Crop 136
Crossfades
 Creating 168
 Editing in dialog 170
 Presets 176
 Removing 169
Simple Crossfade Editor 170

- Csh files 444
- Cubase VST files 694
- Cursor, see “*Project cursor*”
- Cut Time 135
- Cycle
 - About 32
 - About recording 42
 - Recording audio 54
 - Recording MIDI 69
- Cycle markers
 - About 150
 - Adding in Marker window 151
 - Drawing 155
 - Editing 157
 - Making selections with 158
 - Navigating to 157
 - On Marker track 154
- Cycle Record modes 69
- D**
- DC Offset 345
- Deactivate Punch In on Stop 76
- Default Edit Action 489
- Default project 680
- Delay compensation 231
 - Constraining 268
- Delete
 - Audio files from disk 430
 - Events in Project window 128
 - MIDI controllers 480, 521
 - MIDI drum notes 528
 - MIDI notes 507
- Delete Continuous Controllers 480
- Delete Controllers function 480
- Delete Doubles function 479
- Delete Notes function 480
- Delete Overlaps
 - Audio 59
 - Mono 482
 - Poly 482
- Delete Overlaps (audio) 130
- Delete Time 135
- Detect Silence 360
- DirectShow 659
- DirectX plug-ins 258
- Disable Hitpoints 412
- Disable inserts 234
- Disable sends 249
- Disable Track 34
- Display format 94
- Dissolve Part
 - Audio 113
 - MIDI 484
- Dithering 239
- Divide audio events 418
- Dividing the Track list 108
- Drag Delay 117
- Draw
 - Automation events 310
 - Hitpoints 414
 - In Sample Editor 385
 - Markers 155
 - MIDI controllers 517
 - MIDI notes 500
 - Parts 113
- Drop Out Time 638
- Drum Editor
 - Creating and editing notes 526
 - Muting drum sounds 528
 - Selecting drum maps 534
- Drum maps
 - About 529
 - Making settings 530
 - MIDI channel and output 534
 - O-Note Conversion 537
 - Selecting 534
 - Setup dialog 535
- Drum mode (Time Stretch) 350
- Drum name lists 537
- Drum Sound Solo 528

- Drumstick tool 526
- Duplicate
- Events and parts 119
 - MIDI notes 504
- Duplicate track 107
- E**
- Edit Active Part Only 490
- Edit as Drums when Drum Map is assigned 489
- Edit button
- Audio channel strips 209
 - Audio track Inspector 87
 - MIDI channel strips 222
 - MIDI track Inspector 452
- Edit Mode 666
- Editing via MIDI 509
- Edits folder 328
- Effect Return channels 251
- Effects, see “*Audio effects*” or “*MIDI effects*”
- Elements (Sample Editor) 369
- Enable Record on Selected Track 39
- Enable Track 34
- Envelope 334
- EQ
- Bypassing 214
 - Presets 214
 - Setting 211
- Equal Pitch (Selection) 503
- Eraser tool 128
- Event as Region 136
- Events
- Duplicating 119
 - Grouping 126
 - Locking 125
 - Moving 117
 - Muting 127
 - Overlapping in audio part 393
 - Overlapping in Project window 118
 - Removing 128
 - Renaming 121
 - Renaming all on track 106
 - Resizing 122
 - Resizing with time stretch 124
 - Selecting 116
 - Sliding contents 125
 - Splitting 121
 - Events (Snap mode) 138
 - Events from Regions 136
 - Events to Part 113
 - Events, see also “*Audio events*”
 - Exclusive Solo 203
 - Export
 - AES31 685
 - OMF 686
 - OpenTL file 687 - Export Audio Mixdown 597
 - Export MIDI files 689
 - Export Options (MIDI files) 690
 - Export selected tracks 684
 - Export Tempo track 559
 - Extract Audio from Video 699

F

Fade handles 162
Fade In/Out functions 164
Faders 199
Fades
 Auto Fades 178
 Creating 162
 Editing in dialog 165
 Presets 166
 Processing 164
 Removing 164
Feet'n'Frames Count from Project
 Start 95
Fill Loop 120
Filter (MIDI) 75
Filter (Project Browser) 584
Filter bar 543
Find missing files 434
Find Selected in Pool 432
FireWire 662
Fixed Lengths 479
Fixed tempo 550
Fixed Velocity 483
Folder parts 145
Folder tracks
 About 142
 Moving tracks into 143
 Muting and soloing 144
Frame rates 637
Freeze Edits 359
Freeze Quantize 477
Freeze VST Instruments 271
FX channel tracks
 About 242
 Adding effects for 244
 Routing sends to 246
 Setting up 243
 Soloing 252

G

Gain 335
Generic Remote Device 322
Glue Tube tool
 MIDI editors 506
 Project window 121
Grid (Snap mode) 138
Groove Quantize 417
 From MIDI 474
Group 126
Group channel tracks
 About 82
 Routing audio to 219
 Using effects 241

H

Hitpoint Edit tool 412
Hitpoint Sensitivity 411
Hitpoints
 Auditioning 410
 Background 402
 Calculating 409
 Disabling 412
 Editing manually 414
 Locking 413
Horizontal Zooming Only 99, 498

- I**
- Import
 - AES31 685
 - Audio CD Tracks 697
 - Audio files 111
 - Audio from Video file 699
 - Cubase Arrangement 695
 - Cubase Part 696
 - Cubase Song 694
 - Medium in Pool 438
 - MIDI files 689
 - MPEG files 701
 - Ogg Vorbis files 701
 - OMF 686
 - OpenTL file 687
 - Premiere Generic EDL 689
 - REX 700
 - Video files 111
 - WMA files 702
 - Import Audio CD 440
 - Import selected tracks 684
 - Import Tempo track 559
 - Impulse Response file 331
 - Independent track loop
 - Audio Part Editor 397
 - MIDI editors 499
 - Info line
 - Drum Editor 523
 - Key Editor 493
 - Pool 425
 - Project window 92
 - Sample Editor 373
 - Initialize Channel 217
 - I-Note 532
 - Input (MIDI) 64
- J**
- Jog wheel 33
 - Jump tempo curve mode 555

K

- Keep Last
 - Audio cycle recording 54
 - MIDI cycle recording 69
- Key commands
 - About 728
 - Alternative Key Sets 740
 - Default 739
 - Importing 738
 - Loading 738
 - Modifying 729
 - Removing 734
 - Resetting to default 739
 - Saving 736
 - Searching for 733
 - Turning off 732

L

- Lanes
 - Stacked Audio Recording 58
 - Stacked MIDI Recording 70
- Lanes (Audio Part Editor) 392
- Latency
 - Monitoring 49
 - VST System Link 644
- Left locator 32
- Legato 479
- Length Adjustment 74
- Length Compression 457
- Length Quantize 500
- Level faders 199
- Level meters
 - Input VU mode 47
 - Post-Fader VU mode 48
- LFE amount (Surround) 289
- Libraries 682

Line mode

- Automation 311
- MIDI controllers 518
- MIDI velocity 516
- Linear Record Mode
 - Audio 53
 - MIDI 68
- Linear time base 110
- List Editor
 - Adding events 540
 - Editing in the list 541
 - Editing in the value display 545
 - Filtering events 543
 - Masking events 544

Locate when clicked in empty space 30

Locators 32

Lock 125

Lock Event Attributes 125

Lock Hitpoints 413

Lock Time 638

Loop

 Audio Part Editor 397

 MIDI editors 499

Loop icon

 Pool 436

 Sample Editor 375

M

M button 127

Machine control

 Introduction to 620

 Setting up 629

 Sony 9-Pin specifics 635

Macros 734

Magnetic Cursor (Snap mode) 139

Magnifying Glass tool 99

Markers	MIDI effects
About 150	About 459
Adding in Marker window 151	Deactivating 464
Drawing on Marker track 155	Inserts 460
Editing in Project Browser 586	Presets 463
Editing on Marker track 155	Sends 461
ID-numbers 153	MIDI files 689
Key commands for 159	MIDI Filter 75
Marker track 154	MIDI input (Editing via) 509
Marker window 150	MIDI inputs
Moving 152	Renaming 65
Removing 151	Selecting for tracks 65
Snapping to 138	MIDI notes
Mask function 544	Deleting 507
Menus	Drawing 500
Customizing 719	Editing velocity 515
Merge Clipboard 336	Moving 504
Merge MIDI in Loop 465	Muting 507
Merge Record Mode	Muting in Drum Editor 528
Audio 53	Quantizing 469
MIDI 68	Resizing 506
Merge Tempo From Tapping 563	Selecting 502
Meter characteristics 218	Splitting and gluing 506
Metric Bias 411	Transposing (Function) 477
Metronome	Transposing (in editor) 504
Activating 78	MIDI outputs
Precount 78	In drum maps 534
Settings 79	Renaming 65
MIDI channel	Selecting for tracks 66
"Any" 67	Send effects 461
In drum maps 534	MIDI parts
Selecting for tracks 66	About 83
Send effects 461	Drawing 113
MIDI Channel Settings 222	Editing 489
MIDI Clock	Editing in Project Browser 582
About 616	Sliding contents 125
Always use "Start" 627	MIDI Record Catch Range 74
Transmitting 627	MIDI reset 72
MIDI connector button 509	MIDI Thru 64

- MIDI tracks
 - Channel Settings window 222
 - Settings 452
 - Track Parameters 455
- Minimize Files 443
- Mix (Cycle Record mode) 69
- Mixer
 - Common panel 197
 - Extended channel strips 187
 - Group channels 219
 - Hiding channel types 192
 - Input and output busses 198
 - Input/Output settings 187
 - Link/Unlink channels 223
 - Loading settings 226
 - Multiple mixer windows 184
 - Pan 204
 - Saving settings 225
 - Solo and Mute 203
 - View options 189
 - Volume 199
- Mixer Selection Follows Project 210
- Mixing down to an audio file 597
- MMC
 - Introduction to 620
 - Setting up 629
- Modifier keys 742
- Monitor button
 - Audio tracks 50
 - MIDI tracks 64
- Monitoring modes 49
- Move Hitpoints 414
- Move to Back/Front 118
- Move to Cursor 118
- Move to Origin 118
- MP3 files
 - Exporting 605
 - Importing 701
- MP3Pro 605
- MPEG files
 - Audio 701
 - Video 659
- MPEX
 - Pitch Shift 341
 - Time Stretch 350
- Multiple audio tracks 106
- Musical time base 110
- Mute
 - Events in Project window 127
 - MIDI notes 507
 - Mixer 203
 - Tracks 127
- Mute Pre-Send when Mute 249
- Mute tool 127
- N**
 - N. Chan. Split/Interleaved (Export) 600
 - New Project 97
 - Noise Gate 337
 - Non Quantize setting 473
 - Normal Record Mode
 - Audio 53
 - MIDI 68
 - Normal Sizing 122
 - Normalize
 - Audio process 338
 - Surround Panner 290
 - Notes, see “*MIDI notes*”
 - Npl files
 - Libraries 682
 - Pool files 444
 - Npr files 679
 - Nudge buttons
 - MIDI editor toolbar 504
 - Project window toolbar 118
 - Nudge position buttons 34
 - NuendoDither 240
 - Numeric keypad 29

O

Offline Process History 354
Ogg Vorbis files
 Exporting 606
 Importing 701
OMF files 686
On Import Audio Files 112
On Processing Shared Clips 329
On Startup setting 703
Online (VST System Link) 647
O-Note 532
O-Note Conversion 537
Open 678
Open Document Options 704
OpenTL files 687
Original Tempo (Hitpoints) 408
Output (MIDI) 64
Output busses
 About 14
 Adding 18
 Mixing down to file 596
 Routing channels to 20
 Surround configurations 281
 Viewing in the mixer 21
Output channels 198
Outputs (Audio) 16
Over Quantize 474
Overlapping events
 Audio Part Editor 393
 Project window 118
Overview 105
Overwrite (Cycle Record mode)
 69
Overwrite mode (Automation) 305

P

Padlock symbol 125
Pan Law 206
Pan modes 204
Parabola mode
 Automation 311
 MIDI controllers 518
 MIDI velocity 516
Part Data mode 104
Part to Groove 474
Parts, see “*Audio parts*” or
“*MIDI parts*”
Paste at Origin 120
Paste Time
 MIDI editing 505
 Selection ranges 135
Patch Editor (Surround) 292
Peak Hold Time 218
Pedals to Note Length 481
Pencil tool 113
Pending Connections 679, 694
Performance meter 227
Phase Reverse 339
Pitch Bend
 Deleting 521
 Editing 517
 Recording 71
Pitch Shift 339
Play icon
 Pool 436
 Sample Editor 375
Play tool
 Audio Part Editor 396
 Project window 114
Plug-in delay compensation 231
Plug-in Information window
 MIDI plug-ins 464
 VST plug-ins 258

Plug-ins	Project
Applying 351	Activating 678
Automating 307	Creating 97
Getting info 258	Default 680
In surround configurations 292	Opening 678
Installing 256	Saving 679
Organizing 257	Saving templates 682
Poly Pressure events 521	Project Browser 576
Polyphony (Restricting) 481	Project cursor
Pool	Autoscroll 140
About 422	Moving 30
Auditioning 436	Selecting events with 117
Convert Files 445	Snapping to 139
Finding clips in 431	Project overview line 105
Handling audio clips 428	Project scrubbing 33
Import Medium 438	Project Setup dialog 97
Importing Pool files 444	Punch In
Locate missing files 434	Automatic 41
Record folder 441	Manual 40
Status column icons 427	Punch Out 41
Position Mode 286	Q
Post-Fader VU meters 48	Quantize
Postroll 77	About 469
Pre fader sends 248	Applying 474
Pre/Post crossfade 330	Automatic during recording 68
Precount 78	Creating grooves from audio 417
Preferences	Creating grooves from MIDI 474
Presets 722	Ends 476
Transferring 724	Freezing 477
Premiere Generic EDL files 689	Lengths 475
Prepare Archive 444	Setting on toolbar 470
Preroll 77	Setup dialog 470
Processing	Undoing 477
About 329	Quick Zoom 100
Batch Process 356	Quicktime 659
Plug-ins 351	
Settings and functions 330	
Undoing 354	

R

- R button 303
- Ramp tempo curve mode 555
- Random (Track parameter) 457
- Random Quantize setting 473
- Range (Track parameter) 458
- Range Selection tool 132
- Read button 303
- Real Audio files 607
- Real-Time Export 598
- Reconstruct 435
- Record Catch Range 74
- Record enable
 - 9-Pin Devices 635
 - Audio and MIDI tracks 39
- Record file type 43
- Record folder 46
- Record format 44
- Record Mode (Linear)
 - Audio 53
 - MIDI 68
- Recording in MIDI editors 74
- Recording tempo changes 557
- ReCycle files 700
- Redo Zoom 103
- Regions
 - Creating 382
 - Creating from events 136
 - Creating with Detect
 - Silence 362
 - Editing 383
 - Exporting as audio files 440
 - Removing 384
- Remote control
 - Key commands 321
 - Setting up 318
 - Writing automation 320
- Remove DC Offset 345
- Remove missing files 435
- Remove Parameter 313
- Removing crossfades 169
- Removing fades 164
- Repeat
 - Events and parts 119
 - MIDI notes 504
- Replace Audio in Video File 663
- Replace Record Mode
 - Audio 53
 - MIDI 68
- Reset 72
- Reset Mixer 217
- Resolution 44
- Resolving 618
- Restrict Polyphony 481
- Retrospective Record 73
- Return To Start Position on
 - Stop 34
- Reverse 346
- Reverse (MIDI function) 483
- Revert 682
- ReWire
 - About 670
 - Activating 672
 - Channels 674
 - Routing MIDI 675
- REX files 700
- Right locator 32
- Routing
 - Audio to and from busses 20
 - Effect sends 247
 - Effect sends (Panning) 249
 - Inputs/outputs in effects 236
- Ruler
 - About 94
 - Adding additional time scales 95
- Ruler tracks 95

S

- S button 127
- Sample rate 98
- Sample size 44
- Save 679
 - Save Project to new folder 681
- Scissors tool
 - MIDI editors 506
 - Project window 121
- Scrubbing
 - Events in Project window 115
 - Events in Sample Editor 376
 - Project 33
 - Resizing events by 123
 - While setting snap point 377
- Search key commands 733
- Selecting
 - Events in Project window 116
 - MIDI notes 502
 - Mixer channels 210
- Send effects (Audio) 242
- Sensitivity slider 411
- Set Audio Event from Loop 418
- Set Pool Record Folder 441
- Set Record Folder 46
- Set Tempo from Event 419
- Set Timecode at Cursor 625
- Shared copy 119
- Shared VST plug-ins folder 257
- Show Controllers 104
- Show Data on Small Track Heights 103
- Show Event Names 103
- Show Event Volume Curves
 - Always 162
- Show Filter View 543
- Show Part Borders 491
- Show Used Automation 308
- Show Video Thumbnails 665
- Shuffle (Snap mode) 139
- Shuttle speed 33
- Signal levels 47
- Silence 346
- Simple Crossfade Editor 170
- Sine mode
 - Automation 312
 - MIDI editing 519
- Sizing Applies Time Stretch 124
- Sizing Moves Contents 122
- Slices
 - Auditioning 410
 - Creating 416
 - Disabling 412
 - Locking 413
- Snap
 - MIDI editors 547
 - Project window 137
- Snap point
 - Setting for clips in Pool 437
 - Setting in Project window 137
 - Setting in Sample Editor 376
- Snap Record Parts to Bars 74
- Snap to Zero Crossing
 - Preference setting 140
 - Sample Editor 387
- Snap Track Heights 100
- Solo
 - Audio Part Editor 397
 - Folder tracks 144
 - MIDI editors 498
 - Mixer 203
 - Tracks 127
- Solo Defeat 203, 252
- Solo Record in MIDI Editors 74

Sony 9-Pin
AutoEdit 636
Control Playback Speed 636
Record enabling audio
tracks 635
Setting up 632
Sound Designer II files 602
Speaker icon (MIDI editors) 499
Speaker tool
Audio Part Editor 396
Project window 114
Speakers (SurroundPanner) 287
Spectrum Analyzer 363
Split
Events 121
Range 136
Split at Cursor
MIDI editors 506
Project window 121
Split Loop
MIDI editors 506
Project window 121
Split MIDI Events 121
Square mode
Automation 312
MIDI editing 519
Stacked Cycle Recording
Audio 58
MIDI 70
Standard Mode 286
Start Record at Left Locator 40
Startup options 703
Static Value Line (Automation) 309
Stationary cursor 140
Statistics 366
Step Bar 30
Step input 510
Step Input button 510
Stereo Flip 347
Stereo Pan Law 206
Stereo pan modes 204
Stereo Split 600
Stop after Automatic Punch Out 76
Stretch to Project Tempo 419
Strip Silence 362
Surround
About 276
Applying plug-ins 292
Exporting to file 291
Positioning sounds 285
Routing to surround
channels 284
Setting up 281
Surround Panner 285
Swing 471
Sync indicator 626
Sync Selection 578
Synchronization
About 614
Audio card settings 624
Connections for 623
Formats 615
Frame rates 637
Indicator (Transport panel)
626
Machine control 629
Options 638
Recording in Sync mode 40
Synchronization Setup 622
Syncing equipment to
Nuendo 627
To timecode 624

T

Tap Tempo 562
Templates 682
Tempo
 About 550
 Calculating 561
 Editing 554
 Editing in Project Browser 587
 Importing and exporting 559
 Recording 557
 Setting from event 419
 Setting in Fixed mode 558
 Tapping 562
Tempo based tracks 110
Tempo record slider 557
Time based tracks 110
Time display 31
Time format 94
Time Linear
 MIDI editors 493
 Tempo Track Editor 552
Time Scales 95
Time signature 559
Time Stretch 348
Time Warp tool 564
Timecode
 About 615
 Frame rates 637
 Synchronizing to 624
Toggle Track List 109
Tool modifier keys 742
Toolbar
 Audio Part Editor 391
 Customizing 712
 Drum Editor 523
 Key Editor 492
 List Editor 538
 Pool 424
 Project window 91
 Sample Editor 370

Touch Fader mode 304
Track Control Settings 714
Track list
 About 85
 Customizing 714
 Dividing 108
Track Parameters 455
Track Sheet 590
Track types 82
Tracks
 Adding 106
 Audio channel configuration 44
 Changing height of 100
 Disabling/Enabling 34
 Importing and exporting 684
 Locking 126
 Musical/Linear time base 110
 Removing 107
 Renaming 106
 Routing MIDI to VST Instruments 265
 Selecting 107
Transfer projects and settings 724
Transfer tracks between projects 684
Transparent events 103
Transport menu
 Functions 27
 Playback options 35
Transport panel
 Customizing 710
 Display format 31
 Hiding and showing 27
 Key commands 29
 Overview 26
Transpose
 Info line 93
 MIDI function 477
 Track parameter 456

- Triangle mode
 Automation 312
 MIDI editing 519
- Trim buttons 123
- Trim mode 305
- U**
- Undo
 Processing 354
 Recording 52
 Zoom 103
- Undo Quantize 477
- Ungroup 126
- Unlock 125
- Update Display 598
- Update Origin 426
- Use File Extension in
 File Dialog 680
- Use level scan (Hitpoints) 404
- Use pop-up menu (Hitpoints) 411
- UV22 HR 240
- V**
- Velocity
 Editing 515
 Editing via MIDI 509
 Info line 93
 MIDI function 482
- Velocity Compression 456
- Velocity Shift 456
- Video
 Edit Mode 666
 Extracting audio from 662
 Importing files 660
 Playing back 661
 Playing back via FireWire 662
 Preparations 664
 Replacing audio 663
 Setting up 659
- Video Cache Size 665
- Video for Windows 659
- Video playback engine 659
- Video track
 About 660
 Editing in Project Browser 585
 Showing thumbnails 665
- Volume (Info line) 199
- Volume handle 163
- VST Channel Settings 209
- VST Connections 17
- VST Instruments
 Activating 265
 Automating 270
 Channels 266
 Freezing 271
 Routing tracks to 265
 Selecting patches 269
 Using VST System Link 653
- VST Performance window 227
- VST plug-ins
 Getting info 258
 Installing 256
- VST Ports 16
- VST System Link
 About 640
 Activating 646
 Connections 642
 Latency 644
 MIDI 649
 Putting computers online 647
 Requirements 641
 Setting up sync 642
 Settings 645
- VU meters
 Input VU mode 47
 Post-Fader VU mode 48
- VU-Meter Peak's Hold Time 218

W

W button 303
Wave files 602
Wave Image Style 104
Wave64 files 604
Waveform zooming 100
Window layouts 707
Windows Media Audio files
 Exporting 608
 Importing 702
 Surround format (Pro) 609
WMA files
 Exporting 608
 Importing 702
WMA Pro files 609
Word Clock
 About 616
 Selecting for sync 624
 Setting up 623
Wrap Controls (Track list) 100
Write button 303

X

X-Over mode 305
Z
Zero Crossings 140
Zoom
 About 99
 History 103
 Presets 101
 Sample Editor 374
 Track height 100
 Waveforms 100
Zoom N Tracks 101
Zoom Tool Standard Mode 99,
 498
Zoom while Locating in
 Time Scale 100

